

166 Lincolnway Valparaiso, IN 46383 (219) 462-1161 Valpo.us

#### **MEETING AGENDA**

Valparaiso Plan Commission Tuesday, July 2, 2024, 5:30 PM Valparaiso City Hall – Council Chambers

- 1. Pledge of Allegiance
- 2. Roll Call
- 3. Adoption of Meeting Minutes June 4, 2024
- 4. Old Business

**ZO24-001**, a Text Amendment to the Unified Development Ordinance presented by Plan Commission staff updating Article 2, Permitted Uses and Supplemental Standards; Article 7, Stormwater Management; Article 13, Nonconformities; Article 15, Permits and Procedures; and Article 18, Definitions.

5. New Business

**MS24-001**, a petition filed by Kelly Kaminski of Coolman Builders, 359 S. Franklin Street, Valparaiso, IN 46383. The petitioner requests approval of a primary plat for a 4-lot minor subdivision to be known as Campbell Street Townhomes on about 0.44 acres at 452 Chicago Street, Valparaiso, 46385. *A public hearing will be held.* 

- 6. Staff Items
- 7. Adjournment

Matt Evans, President Beth Shrader, Planning Director

Next Meeting: Tuesday, August 6, 2024

## ARTICLE 7 STORMWATER MANAGEMENT

## **DIVISION 7.100 PURPOSE AND APPLICABILITY GENERAL INFORMATION**

## Sec. 7.101 Authority and Title

- A. Authority. This Article of the UDO is adopted in accordance with statutory authority granted to the City under its "Home Rule" authority, as well as in accordance with the "Indiana Drainage Code", and further is required by Indiana Code (IC) 36-9-28.5; Indiana Code (IC) 36-9-27-69.5; Phase II of the National Pollution Discharge Elimination System (NPDES) Stormwater program (FR Doc. 99-29181\_40 CFR Parts 9, 122, 123, and 124; December 8, 1999) authorized by the 1972-1987 amendments to the Clean Water Act; the Indiana Department of Environment Management's (IDEM) Rule 13 (327 IAC 15-13) Municipal Separate Storm Sewer System (MS4) General Permit (MS4GP); and the Indiana Department of Environmental Management's Rule 5 (327 IAC 15-5) Construction Stormwater General Permit (CSGP). Based on this authority and these requirements, this Article regulates:
  - 1. Discharges of prohibited non-stormwater flows into the stormwater drainage system;
  - 2. Stormwater drainage improvements related to development of lands located within the City;
  - 3. Drainage control systems installed during new construction and grading of lots and other parcels of land;
  - 4. Stormwater, including stormwater runoff, snowmelt runoff, and surface runoff and drainage, associated with construction activity;
  - 3.5. Stormwater discharges from construction support activities directly related to construction sites subject to this ordinance;
  - 4.<u>6.</u> Erosion and sediment control systems installed during new construction and grading of lots and other parcels of land;
  - 5.7. The design, construction, and maintenance of stormwater drainage facilities and systems;
  - 6.8. The design, construction, and maintenance of stormwater quality facilities and systems; and
  - 7.—Land disturbing activities affecting wetlands.
- B. Title. This Article shall be known and may be cited as the City of Valparaiso Stormwater Management Ordinance.

Ordinance No. 15, 2015

Effective on: 6/23/2015

# Sec. 7.102 Applicability and Exemptions

- A. Applicability. This Article shall regulate all development and redevelopment occurring within the City, falling under the jurisdiction of the City of Valparaiso government and any significant discharge into the City's stormwater conveyance facilities.
- B. Required Compliance. In addition to the requirements of this Article, compliance with the requirements set forth in other articles of this UDO is also necessary. Compliance with all applicable ordinances of the City, and all applicable Federal or State of Indiana statutes and regulations is required. Unless otherwise stated, all other specifications referred to in this Article shall be the most recent edition available.
- C. Applicable to City. The City's public works projects are expected to meet all applicable technical requirements of this Article and the City's Stormwater Technical Standards Manual.
- D.—Determination of Applicability. A pre-application conference (see Sec. 15.302, Pre-Application Conference), with the City Engineer may be requested by the applicant to discuss the applicability of various provisions of the Article and its associated technical standards document with regards to unique or unusual circumstances relating to a project. However, any initial determination of such applicability shall not be binding

on future determinations of the City Engineer that may be based on the review of more detailed information and plans.

Effective on: 6/22/2015

- A. Applicability. This Article shall regulate all development and redevelopment occurring within the City of Valparaiso. No Site Permit shall be issued and no land disturbance started for any construction in a development, as defined in Article 18, Definitions, until the plans required by this Ordinance for such construction have been accepted by the City Engineer.
- B. Exemption. With the exception of the requirements of Division 7.200 Prohibited Discharges and Connections, and Sec. 7.604 Review of Individual Lot, of this Ordinance, land-disturbing activities affecting less than 3,000 square feet of area shall be exempt from the requirements of this Ordinance, though a Site Permit may still be required as stated in Sec. 15.202 C. Site Permit.

Also exempt from this Ordinance shall be agricultural land-disturbing activities.

Any construction project which has had its final drainage plan accepted by the City Engineer within a 2-year period prior to the effective date of this Ordinance shall be exempt from all requirements of this Ordinance, with the exception of the requirements of **Division 7.400**, **Stormwater Pollution Prevention for Construction Sites**, and applicable sections of **Division 7.600**, **Permits Requirements and Procedures**, that are in excess of the requirements of ordinances in effect at the time of acceptance. Such an exemption is not applicable to the requirements detailed in **Division 7.200**, **Prohibited Discharges and Connections**.

- C. Required Compliance. In addition to the requirements of this Ordinance and its companion Stormwater Technical Standards Manual, compliance with all applicable ordinances of City of Valparaiso as well as with applicable Federal, State of Indiana, and other Local statues and regulations shall also be required. Unless otherwise stated, all other specifications referred to in this Ordinance shall be the most recent edition available. City of Valparaiso capital improvement projects shall be exempt from obtaining a permit, but are expected to meet all applicable technical requirements of this Ordinance and the City of Valparaiso Stormwater Technical Standards Manual. If the project site is located within a Porter County Regulated Drain Watershed, the applicant will need to check with the Porter County Surveyor's Office to learn if additional Surveyor's Office requirements specific to that regulated drain would apply to the site.
- D. **Conflicting Requirements.** In case there are conflicts between the requirements contained in this Ordinance and applicable requirements contained in other regulatory documents referenced above, the most restrictive shall prevail.
- E. Authority and Determination of Applicability. The City of Valparaiso has the authority to modify, grant exemptions, and/or waive any and all the requirements of this Ordinance and its associated technical standards document. A pre-submittal meeting with the City Engineer may be requested by the applicant to discuss the applicability of various provisions of the Ordinance and its associated technical standards document with regards to unique or unusual circumstances relating to a project. However, any initial determination of such applicability shall not be binding on future determinations of the City Engineer that may be based on the review of more detailed information and plans.

  A.—

# Sec. 7.103 Background

On December 8, 1999, Phase II of the National Pollutant Discharge Elimination System (NPDES) stormwater permit program, was published in the Federal Register. The NPDES program, as authorized by the 1972 amendments to the Clean Water Act, controls water pollution by regulating point sources that discharge pollutants into waters of the United States. Phase II of NPDES stormwater program requires permit coverage for stormwater discharges from regulated small Municipal Separate Storm Sewer Systems (MS4s) and for small construction activity that results in

the disturbance of one—to five acres\_acre or more. This Federal regulation went into effect March 10, 2003. In response to Phase II of NPDES, the Indiana Department of Environmental Management (IDEM) enacted Rule 13 (327 IAC 15-13) to meet the Federal guidelines set for MS4s, and revised Rule 5 (327 IAC 15-5) to cover all construction sites one acre or more. Under State and Federal regulations, the City is required to establish a regulatory mechanism for regulating stormwater quality management. In December 2021, IDEM replaced 327 IAC 15-5 (Rule 5) with an updated Construction Stormwater General Permit (CSGP) and 327 IAC 15-13 (Rule 13) with an updated MS4 General Permit (MS4GP).

Ordinance No. 15, 2015

Effective on: 6/23/2015

## Sec. 7.104 Findings

The City Council of Valparaiso finds that:

- A. **Flooding**. Water bodies, roadways, structures, and other property within, and downstream of the City are at times subjected to flooding;
- B. **Flooding Danger**. Flooding is a danger to the lives and property of the public and is also a danger to the natural resources of the region;
- C. **Development Impact**. Land development alters the hydrologic response of watersheds, resulting in increased stormwater runoff rates and volumes, increased flooding, increased stream channel erosion, and increased sediment transport and deposition;
- D. **Erosion Impact**. Soil erosion resulting from land-disturbing activities causes a significant amount of sediment and other pollutants to be transported off-site and deposited in ditches, streams, wetlands, lakes, and reservoirs;
- E. **Adverse Affects**. Increased stormwater runoff rates and volumes, and the sediments and pollutants associated with stormwater runoff from future development projects within the City will, absent reasonable regulation and control, adversely affect the City's water bodies and water resources;
- F. **Pollutant Impact**. Pollutant contributions from illicit discharges within the City will, absent reasonable regulation, monitoring, and enforcement, adversely affect the City's water bodies and water resources;
- G. **Control Measures**. Stormwater runoff, soil erosion, non-point source pollution, and illicit sources of pollution can be controlled and minimized by the regulation of stormwater management;
- H. **Affect of this Article**. Adopting the standards, criteria, and procedures contained and referenced in this Article and implementing the same will address many of the deleterious effects of stormwater runoff and illicit discharges; and
- I. **Necessity**. Adopting this Article is necessary for:
  - 1. The preservation of the public health, safety, and welfare;
  - 2. The conservation of our natural resources; and
  - 3. Compliance with State and Federal regulations.

Ordinance No. 15, 2015

Effective on: 6/23/2015

# Sec. 7.105 Purpose and Objectives

- A. **Purpose.** The purpose of this Article is to provide for the health, safety, and general welfare of the citizens of the City of Valparaiso through the regulation of stormwater and non-stormwater discharges to the storm drainage system and to protect, conserve, and promote the coordinated development of land and water resources within the City of Valparaiso. This Article establishes methods for managing the quantity and quality of stormwater entering into the stormwater drainage system in order to comply with State and Federal requirements.
- B. **Objectives**. The objectives of this Article are to:

- 1. Reduce the hazard to public health and safety caused by excessive stormwater runoff;
- 2. Regulate the contribution of pollutants to the stormwater drainage system due to construction site runoff;
- 3. Regulate the contribution of pollutants to the stormwater drainage system and public waters from runoff from new development and redevelopment;
- 4. Prohibit illicit discharges into the stormwater drainage system; and
- 5. Establish legal authority to carry out all inspection, monitoring, and enforcement procedures necessary to ensure compliance with this Article.

Ordinance No. 15, 2015

Effective on: 6/23/2015

## Sec. 7.106 Abbreviations and Definitions

Refer to **Article 18**, **Definitions** for abbreviations and definitions.

## Sec. 7.<del>106</del>\_<u>107</u> Responsibility for Administration

The City Engineer shall administer, implement, and enforce the provisions of this Article through the Engineering Department, Board of Public Works and Safety, Valparaiso City Utilities Board, and Plan Commission, as set out in **Sec. 14.803**, **City Engineer**, as well as **Article 17**, **Enforcement, Interpretation, and Repealer**. <u>Any powers granted or duties imposed upon the authorized enforcement agency may be delegated in writing by the City of Valparaiso to qualified persons or entities acting in the beneficial interest of or in the employ of the City of Valparaiso.</u>

Ordinance No. 15, 2015

Effective on: 6/23/2015

# Sec. 7.107 108 Conflicting Ordinances and Requirements

The provisions of this Article shall be deemed as additional requirements to the minimum standards required by other City ordinances, and as supplemental requirements to Indiana's Rule 5-CSGP and MS4GP regarding Stormwater Discharge Associated with Construction Activity (327 IAC 15-5) construction sites, and Indiana's Rule 13 regarding Stormwater Runoff Associated with Municipal Separate Storm Sewer System (MS4) conveyances (327 IAC 15-13). In case of conflicting requirements, the most restrictive shall apply.

Ordinance No. 15, 2015

Effective on: 6/22/2015

# Sec. 7.108 109 Severability

The provisions of this Article are hereby declared severable, as set out in **Sec. 17.301**, **Severability**.

Ordinance No. 15, 2015

Effective on: 6/23/2015

# Sec. 7.109 <u>110</u> Disclaimer of Liability

The degree of protection required by this Article is considered reasonable for regulatory purposes and is based on historical records, engineering, and scientific methods of study. Larger storms may occur or stormwater runoff amounts and/or stormwater quality may be altered by man-made or natural causes. This Article does not imply that land uses permitted will be free from stormwater damage. This Article shall not create liability on the part of the City Council, Valparaiso City Utilities Board, Plan Commission, City Engineer, or any officer, representative, or employee thereof, for any damage which may result from reliance on this Article or on any administrative decision lawfully made in accordance with this Article.

The words "approve" and "accept", and their common derivations as used in this Ordinance in relation to plans, reports, calculations, and permits shall mean that City Engineer has reviewed the material produced and submitted by the applicant or his/her agents for general compliance with this Ordinance and the City of Valparaiso Stormwater Technical Standards Manual, and that such compliance would qualify the applicant to receive a stormwater management approval or permit. Such an "approval" or "acceptance" is based on the assumption that the project engineer has followed all appropriate engineering methods in the design. Any stormwater quantity (drainage) or water quality problems associated with the project caused by poor construction by the contractor and/or poor engineering design or judgment, either on-site or off-site, are the responsibility of the developer and the project engineer.

Consideration, design, construction, and maintenance of safety measures for proposed or existing stormwater facilities shall be the responsibility of the developer, applicant, and/or the property owner. City of Valparaiso and its officials and representatives shall not be responsible for maintenance nor liability for any accidents.

Ordinance No. 15, 2015

Effective on: 6/23/2015

## **DIVISION 7.200 PROHIBITED DISCHARGES AND CONNECTIONS**

## Sec. 7.201 Reference Applicability and Exemptions

Refer to the Code of Ordinances, Chapter 54, Illicit / Illegal Discharges and/or Connections to Storm Drainage System, for this Division.

- A. Applicability. This Division shall apply to all discharges, including illegal dumping, entering the stormwater drainage system under the control of the City of Valparaiso, regardless of whether the discharge originates from developed or undeveloped lands, and regardless of whether the discharge is generated from an active construction site or a stabilized site. These discharges include flows from direct connections to the stormwater drainage system, illegal dumping, and contaminated runoff.
- B. Exemptions. Stormwater runoff from agricultural, timber harvesting, and mining activities is exempted from the requirements of this Division unless determined to contain pollutants not associated with such activities or in excess of standard practices. Farm residences are not included in this exemption. Any non-stormwater discharge permitted under an NPDES permit, waiver (unless the waiver is solely based on point source considerations, still allowing non-point source discharge of a pollutant), or waste discharge order issued to the discharger and administered under the authority of the Federal Environmental Protection Agency, provided that the discharger is in full compliance with all requirements of the permit, waiver, or waste discharge order and other applicable laws and regulations, and provided that written approval has been granted for the subject discharge to the stormwater drainage system, is also exempted from this Division.

# Sec. 7.202 Prohibited Discharges and Connections

No person shall discharge to a MS4 conveyance, watercourse, or waterbody, directly or indirectly, any substance other than stormwater or an exempted discharge. Any person discharging stormwater shall effectively minimize pollutants from also being discharged with the stormwater, through the use of best management practices (BMPs). The City Engineer is authorized to require dischargers to implement pollution prevention measures, utilizing BMPs necessary to prevent or reduce the discharge of pollutants into the City of Valparaiso's stormwater drainage system.

# Sec. 7.203 Exempted Discharges and Connections

Notwithstanding other requirements in this Ordinance, the following categories of non-stormwater discharges or flows are exempted from the requirements of this Division:

- 1. Water line and hydrant flushing for maintenance;
- 2. Irrigation water:
- 3. Uncontaminated footing, foundation, and crawl space drains:
- 4. Uncontaminated excess storm sewer cleaning water not collected by a vacuum truck;

- 5. Water from fire suppression activities;
- 6. Uncontaminated pumped ground water;
- 7. Springs;
- 8. Residential car washing;
- 9. Non-commercial car washing by community organizations:
- 10. External building washdown water without detergents;
- 11. Dechlorinated swimming pool discharges;
- 12. Uncontaminated groundwater infiltration:
- 13. Pavement wash waters provided spills or leaks of toxic or hazardous materials have not occurred (unless all spill material has been removed) and where detergents are not used;
- 14. Uncontaminated condensate from air conditioning units, coolers, and other compressors, and from outside storage of refrigerated gases or liquids

# Sec. 7.204 Storage of Hazardous or Toxic Material

Storage or stockpiling of hazardous or toxic material within any watercourse, or in its associated floodway or floodplain, is strictly prohibited. Storage or stockpiling of hazardous or toxic material, including sewage treatment plant stockpiles, on active construction sites must include adequate protection and/or containment so as to prevent any such materials from entering any temporary or permanent stormwater conveyance or watercourse.

## **Sec. 7.205 Private Property Maintenance Duties**

Every person owning property through which a watercourse passes, or such person's lessee, shall keep and maintain that part of the watercourse located within their property boundaries, free of trash, debris, and other obstacles that would pollute, contaminate, or significantly retard the flow of water through the watercourse. In addition, the owner or lessee shall maintain existing privately owned structures within or adjacent to a watercourse, so that such structures will not become a hazard to the use, function, or physical integrity of the watercourse.

## Sec. 7.206 Spill Reporting

Any discharger who accidentally discharges into a waterbody any substance other than stormwater or an exempted discharge shall immediately inform the City Engineer concerning the discharge. A written report concerning the discharge shall be filed with the City of Valparaiso and IDEM, by the dischargers, within five (5) days. The written report shall specify:

- 1. The composition of the discharge and the cause thereof;
- 2. The date, time, and estimated volume of the discharge;
- 3. All measures taken to clean up the accidental discharge, and all measures proposed to be taken to prevent any recurrence;
- 4. The name and telephone number of the person making the report, and the name and telephone number of a person who may be contacted for additional information on the matter.

A properly reported accidental discharge shall be an affirmative defense to a civil infraction proceeding brought under this Ordinance against a discharger for such discharge. It shall not, however, be a defense to a legal action brought to obtain an injunction, to obtain recovery of costs or to obtain other relief because of or arising out of the discharge. A discharge shall be considered properly reported only if the discharger complies with all the requirements of this Division. This requirement does not relieve discharger from notifying other entities as required by State or Federal regulations.

## Sec. 7.207 Inspections and Monitoring

A. Stormwater Drainage System. The City of Valparaiso, through Engineering Department and Valparaiso City Utilities, has the authority to periodically inspect the portion of the stormwater drainage system under the City of Valparaiso's control, in an effort to detect and eliminate illicit connections and discharges into the system. This inspection will include a screening of discharges from outfalls connected to the system in order to determine if prohibited flows are being conveyed into the stormwater drainage system. It could also include spot testing

- of waters contained in the stormwater drainage system itself to detect the introduction of pollutants into the system by means other than a defined outfall, such as dumping or contaminated sheet runoff.
- B. Potential Polluters. If, as a result of the stormwater drainage system inspection, a discharger is suspected of an illicit discharge, the properly identified representatives of the City of Valparaiso may inspect and/or obtain stormwater samples from stormwater runoff facilities of the subject discharger, to determine compliance with the requirements of this Ordinance. Upon request, the discharger shall allow the City of Valparaiso's representatives to enter upon the premises of the discharger at all hours necessary for the purposes of such inspection or sampling. The City of Valparaiso's representatives may place on the discharger's property the equipment or devices used for such sampling or inspection. Identified illicit connections or discharges shall be subject to enforcement action as described in Article 17, Enforcement, Interpretation, and Repealer.
- C. New Development and Re-Development. Following the final completion of construction and the receipt of asbuilt drawings by the City of Valparaiso, the City of Valparaiso's properly identified representatives have the authority to inspect new development and re-development sites to verify that all on-site stormwater conveyances and connections to the stormwater drainage system are in compliance with this Division.

Ordinance No. 15, 2015

Effective on: 6/22/2015

## **DIVISION 7.300 STORMWATER QUANTITY MANAGEMENT**

## Sec. 7.301 Applicability and Exemptions

The storage and controlled release <a href="rate">rate</a> of excess stormwater runoff shall be required for all new business, <a href="institutional developments">institutional developments</a>, commercial, and industrial developments; residential subdivisions; planned development; rural estate subdivisions; and any redevelopment or other new construction located within the City as set out in **Division 2.200**, **Uses by District**. The City Engineer, after thorough investigation and evaluation, may waive or reduce the requirement of controlled runoff for developments. Additional exemptions regarding the detention requirements are set out in **Sec. 7.302**, **Policy on Stormwater Quantity Management**, **Subsection A.5**, <a href="Direct Release Provisions">Direct Release Provisions</a>, below.

Ordinance No. 15, 2015

Effective on: 6/22/2015

# Sec. 7.302 Policy on Stormwater Quantity Management

- A. Detention Policy. It is recognized that most streams and drainage channels serving the City do not have sufficient capacity to receive and convey stormwater runoff resulting from continued urbanization. Accordingly, except for situations provided in Subsection 5, Direct Release Provisions, below, the storage and controlled release of excess stormwater runoff as well as compensation for loss of floodplain storage shall be required for all developments and redevelopments located within the City.
- B. Release Rate. Release rate requirements, downstream restriction considerations, acceptable outlet, adjoining property impact considerations, and compensatory floodplain storage rates are detailed in the City of Valparaiso Stormwater Technical Standards.
- C. Direct Release. Due to unknowns regarding the future development patterns and the associated proposed stormwater quantity management systems within a watershed, it is the policy of the City of Valparaiso to discourage direct release of runoff from a new development or redevelopment without providing detention. However, in rare circumstances, where a comprehensive watershed-wide hydrologic study or watershed plan of a major stream (not a "beat the peak" analysis) adopted by the City of Valparaiso substantiates the benefits of (or allows for) direct release for a proposed development located adjacent to a major stream, the detention requirements set in this Ordinance may be waived. Other special circumstances when such a waiver may be

considered by the City of Valparaiso include situations where the design of a regional pond has already taken into account the provision of direct release in certain areas in the watershed.

- 1. General Release Rates. In general, the post development release rates for developments up to and including the 100-year return period storm may not exceed 0.5 cfs per acre of development. For sites where the pre-development area has more than one outlet, the release rate should be computed based on pre-development discharge to each outlet point. The computed release rate for each outlet point shall not be exceeded at the respective outlet point even if the post development conditions would involve a different arrangement of outlet points.
- 2. Site-Specific Release Rates for Sites with Depressional Storage. For sites where depressional storage exists, the general release rates provided above may have to be further reduced. If depressional storage exists at the site, site-specific release rates must be calculated according to methodology described in the City's Stormwater Technical Standards Manual, accounting for the depressional storage by modeling it as a pond whose outlet is a weir at an elevation that stormwater can currently overflow the depressional storage area. Post development release rate for sites with depressional storage shall be the two-year pre-development peak runoff rate for the post-development 100-year storm. In no case shall the calculated site-specific release rates be larger than general release rates provided above. Also, note that for determining the post-development peak runoff rate, the depressional storage must be assumed to be filled unless the City Engineer can be assured, through dedicated easement, that the noted storage will be preserved in perpetuity.
- 3. Management of Off-Site Runoff. Runoff from all upstream tributary areas (off-site land areas) may be bypassed around the detention/retention facility without attenuation. Such runoff may also be bypassed through the detention/retention facility without attenuation, provided that a separate outlet system or channel is incorporated for the safe passage of such flows, i.e., not through the primary outlet of a detention facility. Unless the pond is being designed as a regional detention facility, the primary outlet structure shall be sized and the invert elevation of the emergency overflow weir determined according to the on-site runoff only. Once the size and location of primary outlet structure and the invert elevation of the emergency overflow weir are determined by considering on site runoff, the 100 year pond elevation is determined by routing the entire inflow, on-site and off-site, through the pond. Note that the efficiency of the detention/retention facility in controlling the on-site runoff may be severely affected if the off-site area is considerably larger than the on-site area. As general guidance, on-line detention may not be effective in controlling on-site runoff where the ratio of off-site area to on-site area is larger than 5:1. Additional detention (above and beyond that required for the on-site area) may be required by the City Engineer when the ratio of off-site area to on-site area is larger than 5:1.
- 4.—Downstream Restrictions. In the event the downstream receiving channel or storm sewer system is inadequate to accommodate the post-development release rate provided above, then the allowable release rate shall be reduced to that rate permitted by the capacity of the receiving downstream channel or storm sewer system. Additional detention, as determined by the City Engineer, shall be required to store that portion of the runoff exceeding the capacity of the receiving storm sewers or watercourses. When such downstream restrictions are suspected, the City Engineer may require additional analysis to determine the receiving system's limiting downstream capacity. If the proposed development makes up only a portion of the undeveloped watershed upstream of the limiting restriction, the allowable release rate for the development shall be in direct proportion to the ratio of its drainage area to the drainage area of the entire watershed upstream of the restriction.
- 5.—Direct Release Provisions. Due to unknowns regarding the future development patterns and the associated proposed stormwater quantity and quality management systems within a watershed, it is the policy of the City to discourage direct release of runoff from a new development or redevelopment without providing detention. However, in rare circumstances, where a comprehensive watershed-wide hydrologic study or watershed plan of a major stream adopted by the City Engineer (not a "beat the peak" analysis) substantiates the benefits of (or allows for) direct release for a proposed development located adjacent to a major stream, the detention requirements set in this Article may be waived. Other special

circumstances when such a waiver may be considered by the City Engineer include situations where the design of a regional pond has already taken into account the provision of direct release in certain areas in the watershed or when the subject development is immediately next to a major stream that has a larger than 100 square miles drainage area.

- B. Grading and Building Pad Elevations. Maximum yard slopes are 3:1 where soil has been disturbed during construction processes. Finished floor elevation must be no less than one foot above finished grade and a minimum of 18 inches above an adjacent top of curb elevation unless a written variance is granted by the City Engineer. For all structures located in the Special Flood Hazards Area (SFHA) as shown on the FEMA maps, the lowest floor elevations of all residential, commercial, or industrial buildings, shall be such that lowest floor elevation, including basement, shall be at the flood protection grade and therefore, have two feet of freeboard above the 100-year flood elevation. The lowest adjacent grade for residential, commercial, or industrial buildings outside a FEMA or IDNR designated floodplain shall have two feet of freeboard above the flooding source's 100-year flood elevation under proposed conditions, unless the flooding source is a rearyard swale. When the flooding source is a rear-yard swale, the lowest adjacent grade for residential, commercial, or industrial buildings shall have two feet of freeboard above the 100-year flood elevation under proposed conditions. For areas outside a FEMA or IDNR designated floodplain, the lowest adjacent grade (including walkout basement floor elevation) for all residential, commercial, or industrial buildings adjacent to ponds shall be set a minimum of two feet above the 100-year pond elevation or two feet above the emergency overflow weir elevation, whichever is higher. In addition to the lowest adjacent grade requirements, any basement floor must be at least one foot above the permanent water level (normal pool elevation). The 100-year overflow paths throughout the development, whether shown on FEMA maps or not, must be shown as hatched area on the plans and 30 feet along the centerline of the flow path contained within permanent drainage easements. A statement shall be added to the plat that would refer the viewer to the construction plans to see the entire extent of overflow path as hatched areas. No fences or landscaping can be constructed within the easement areas that may impede the free flow of stormwater. These areas are to be maintained by the property owners or be designated as common areas that are to be maintained by the homeowners association. The lowest adjacent grade for all residential, commercial, or industrial buildings shall be set a minimum of one foot above the noted overflow path/ponding elevation, calculated based on all contributing drainage areas, on-site and off-site, in their proposed or reasonably anticipated land use and with storm pipe system assumed completely plugged. It shall be the property owners' responsibility to maintain the natural features on their lots and to take preventive measures against any and all erosion and/or deterioration of natural or manmade features on their lots.
- C. Acceptable Outlet and Adjoining Property Impact Policies. Design and construction of the stormwater facility shall provide for the discharge of the stormwater runoff from off-site land areas as well as the stormwater from the area being developed (on-site land areas) to an acceptable outlet(s) (as determined by the City Engineer) having capacity to receive upstream (off-site) and on-site drainage. The flow path from the development outfall(s) to a regulated drain or natural watercourse (as determined by the City Engineer) shall be provided on an exhibit that includes topographic information. Any existing field tile encountered during the construction shall also be incorporated into the proposed stormwater drainage system or tied to an acceptable outlet. In addition, no activities conducted as part of the development shall be allowed to obstruct the free flow of flood waters from an upstream property. Where the outfall from the stormwater drainage system of any development flows through real estate owned by others prior to reaching a regulated drain or watercourse, no acceptance shall be granted for such drainage system until all owners of real estate and/or tenants crossed by the outfall consent, in writing, to the use of their real estate through a recorded easement. If an adequate outlet is not located on site, then off-site drainage improvements may be required. Those improvements may include, but are not limited to, extending storm sewers, clearing, dredging, and/or removal of obstructions to open drains or natural watercourses, and the removal or replacement of undersized culvert pipes as required by the City Engineer.

Ordinance No. 15, 2015

Effective on: 6/23/2015

The calculation methods, as well as the type, sizing, and placement of all stormwater facilities shall meet the design criteria, standards, and specifications outlined in the City's Stormwater Technical Standards Manual. The methods and procedures in the Stormwater Technical Standards Manual are consistent with the policy stated in **Sec. 7.302**, **Policy on Stormwater Quantity Management**, above.

Ordinance No. 15, 2015

Effective on: 6/23/2015

## Sec. 7.304 Drainage Easement Requirements

- A. **Easement requirements.** Easement requirements along stormwater conveyance systems are contained in the City of Valparaiso Stormwater Technical Standards Manual.
- B. **Maintenance Responsibility.** All stormwater systems, including detention or retention basins, conveyance systems, structures and appurtenances, located outside of the right-of-way relative to the conveyance of stormwater runoff and the perpetual maintenance thereof shall be the responsibility of the owner or homeowner association.
- C. Easement Policy. There shall be no trees or shrubs planted, nor any structures or fences erected in any drainage easement, unless otherwise accepted by the City Engineer.
- D. Porter County Regulated Drainage Easement. Any outlet to, crossing, and/or encroachment of a Porter County Regulated Drainage Easement requires application and acceptance from the Porter County Drainage Board in accordance with the Indiana Drainage Code.

There shall be no trees or shrubs planted, nor any structures or fences erected, in any drainage easement, unless otherwise accepted in writing by the City Engineer. The following specific areas shall be included in a petition:

#### A.—Subdivisions.

- 1.—All new channels, drain tiles equal to or greater than 12 inches in diameter (no drain tiles shall be less than 12 inches in diameter), inlet and outlet structures of detention and retention ponds, and appurtenances thereto as required by this Division, that are installed in subdivisions requiring a site permit (see Sec. 15.202, Administrative Permits) shall be contained within a minimum 20 feet of drainage easement. New drain tiles refer to all subsurface stormwater piping, tubing, tiles, manholes, inlets, catch basins, risers, etc.
- 2.—New drain tile, 12 inches or larger in diameter, shall be placed in a 20-foot easement (10 feet from centerline on each side) and shall be designated on the record plat as "20-foot drainage easement." Wider easements may be required by the City Engineer when the depth of pipe is greater than six to 10 feet, depending on the pipe size.
- 3.—A minimum of 25 feet from top of the bank on each side of a new channel shall be designated on the record plat as a drainage easement.
- 4.—Rear-yard swales and emergency overflow paths associated with detention ponds shall be contained within a minimum of 20 feet width (10 feet from centerline on each side) of drainage easement.
- 5.—A minimum of 25 feet beyond the actual footprint (top of the bank) of stormwater detention facilities shall be designated as drainage easement. A minimum 25-foot wide easement shall also be required as an access easement from a public right-of-way to the facility, unless the pond is immediately next to a public right-of-way.
- 6.—The statutory 75-foot (each side) drainage easement for regulated drains already within the Porter County Regulated Drainage system may be reduced if the drain is reclassified by the County Surveyor as an urban drain.
- 7.—Any crossing and/or encroachment of a regulated drainage easement requires application and acceptance from the Porter County Surveyor's office.

- B. Non-Subdivisions. Where the City Engineer is responsible for maintenance of the drainage system, regulated drainage easements of 75 feet from the top of bank on each side of the channel or each side of the tile centerline must be dedicated to the City.
- C. Municipalities and Schools. All new channels, swales, drain tiles, inlet and outlet structures of detention and retention ponds, and appurtenances thereto, as required by this Division, that are installed on municipal or school property will be maintained, repaired, and constructed by the entity. The design must meet the standards of this Article and the City Engineer for sizing and installation. Any off-site portion of the drainage system must be within easements and have clearly defined maintenance agreements.

Ordinance No. 15, 2015

Effective on: 6/23/2015

#### Sec. 7.305 Placement of Utilities

No utility company may disturb existing storm management facilities without the consent of the City Engineer. <u>All existing drainage facilities shall have senior rights and Damage damage</u> to said facilities shall result in penalties as set out in **Article 17**, **Enforcement, Interpretation, and Repealer**.

Ordinance No. 15, 2015

Effective on: 6/23/2015

## Sec. 7.306 Structures Near County Regulated Drains

For regulated drains not located in platted subdivisions, <u>unless otherwise accepted by the Porter County Drainage</u>
<u>Board</u>, no permanent structure (including fences) shall be constructed within 75 feet measured at right angles from the:

- A. Existing top edge of each bank of a regulated open drain, as determined by the Porter County Drainage Board; or
- B. Centerline of a tiled piped regulated drain, unless otherwise accepted by the Porter County Drainage Board. The Indiana Drainage Code may be consulted for further detail.

Ordinance No. 15, 2015

Effective on: 6/22/2015

# Sec. 7.307 Inspection, Maintenance, Record Keeping, and Reporting

All storm sewers, structures, ditches, swales, culverts, and stormwater quality Best Management Practices shall be designed and constructed according to the requirements of the latest revision(s) of the design and construction standards provided by the City Engineer and sound engineering practice. They shall be designed to safely convey the appropriate design flows, provide the required water quality benefits, and to minimize maintenance and repair needs.

- A. Authority to Inspect. After the approval of the Site Permit by the City Engineer and the commencement of construction activities, representatives from Valparaiso City Utilities and the City Engineer have the authority to conduct inspections of the work being done to ensure full compliance with the provisions of this Division, the Stormwater Technical Standards Manual, Design and Construction Standards, and the terms and conditions of the approved permit. The City Engineer and the Valparaiso City Utilities also have the authority to perform long-term, post-construction inspection of all public or privately owned stormwater quantity facilities. The inspection will cover physical conditions, available storage capacity, and the operational condition of key facility elements.
- B. Maintenance Responsibility. Stormwater quantity facilities shall be maintained in good condition, in accordance with the designed and approved performance specifications for the facilities, in addition to any prescribed Operation & Maintenance procedures, and shall not be subsequently altered, revised or replaced except as approved by the City Engineer. If deficiencies are found during the inspection, the owner of the facility will be notified by the City Engineer and will be required to take all necessary measures to correct such

deficiencies. If the owner fails to correct the deficiencies within the allowed time period, as specified in the notification letter, the City of Valparaiso will undertake the work and collect from the owner using lien rights if necessary.

Assignment of responsibility for maintaining facilities serving more than one lot or holding shall be documented by appropriate covenants to property deeds, unless responsibility is formally accepted by a public body.

Ordinance No. 15, 2015

Effective on: 6/22/2015

# DIVISION 7.400 STORMWATER POLLUTION PREVENTION FOR CONSTRUCTION SITES

# Sec. 7.401 Applicability, and Exemptions, and Site Owner/Permit Holder Responsibilities

- A. Generally. The project site owner must submit to the City Engineer, a Stormwater Pollution Prevention Plan (SWPPP) with detailed erosion and sediment control plans, as well as a narrative describing materials type and specification, handling and storage, and construction sequencing, as part of the construction plans and specifications. The project site owner/permit holder must implement the plan throughout the course of the construction until the project is terminated.
- B.A. Applicability. This Division applies to the land disturbing activities set out below. Projects meeting the coverage requirements of 327 IAC 15-5 (Rule 5) IDEM's CSGP shall also be in compliance with 327 IAC 15-5 the requirements contained in that permit. Guidelines for calculating land disturbance are set out in Sec. 7.403, Calculations and Design Standards and Specifications.
  - 1. Any project located within the <u>corporate boundaries of the</u> City that includes clearing, grading, excavation, and other land disturbing activities, resulting in the disturbance of or impact of one <u>(1)</u> acre or more of total land area, without regard to minimum lot size in the applicable zoning district, which includes both new development and redevelopment;
  - 2. Disturbances of less than one (1) acre of land that is part of a larger common plan of development or sale if the larger common plan will ultimately disturb one (1) acre or more of land, without regard to the minimum lot size in the applicable zoning district, within the City; and
  - 3. Land disturbing activities that involve land disturbance or impact of less than one <a>(1)</a> acre but equal to or greater than 3,000 square feet, without regard to minimum lot size in the applicable zoning district, and/or any disturbing activities with sites immediately adjacent to a storm sewer inlet, ditch, stream, wetland, or other watercourse, and any sites which are located on ground with a slope of six percent or greater.
- <u>C.B.</u> **Exemptions**. The requirements under this Article do not apply to:
  - 1. Land disturbing activities specifically exempted in writing by the Board of Public Works and Safety, or its authorized representative, because of conditions unique to the parcel proposed for development or lot that make the use of soil erosion and sediment controls unnecessary.
  - 2. The following activities:
    - a. Agricultural land disturbing activities; and
    - b. Forest harvesting activities.
  - 3. The following activities, provided other applicable State permits contain provisions requiring immediate implementation of soil erosion control measures:
    - a. Landfills that have been issued a certification of closure under **329 IAC 10**;
    - b. Coal mining activities permitted under IC 14-34; and

c. Municipal solid waste landfills that are accepting waste pursuant to a permit issued by the Indiana Department of Environmental Management under 329 IAC 10 that contains equivalent stormwater requirements, including the expansion of landfill boundaries and construction of new cells either within or outside the original solid waste permit boundary.

## D.—Site Owner / Permit Holder Responsibilities.

- 1.—It will be the responsibility of the project site owner to complete a site permit application and ensure that a sufficient construction plan including a Stormwater Pollution Prevention Plan (SWPPP) is completed and submitted to the City Engineer in accordance with Sec. 15.305, Stormwater Management Plans and Permitting Procedures. It will be the responsibility of the project site owner and/or permit holder to ensure compliance with this Article during the construction activity and implementation of the construction plan, and in following and implementing all Best Management Practices. However, all persons engaging in construction and land disturbing activities on a permitted project site meeting the applicability requirements must comply with the requirements of this Division and Article.
- 2.—An individual lot with land disturbance or impact less than one acre, located within a larger permitted project site, is considered part of the larger permitted project site, and the individual lot operator must comply with the terms and conditions of the site permit approved for the larger project site. The site permit application for the larger project site must include detailed erosion and sediment control measures for individual lots. In addition, these individual lots are required to obtain a site permit for each lot, in accordance with Sec. 15.305, Stormwater Management Plans and Permitting Procedures.

Ordinance No. 15, 2015

Effective on: 6/23/2015

## Sec. 7.402 Policy on Stormwater Pollution Prevention

A. <u>Design Principles. Generally.</u> Effective stormwater pollution prevention on construction sites is dependent on a combination of preventing movement of soil from its original position (erosion control), intercepting displaced soil prior to entering a waterbody (sediment control), and proper on-site materials handling.

#### B. **Principles.**

For a development or a project where land disturbance is expected to be one (1) acre or more, the developer or project owner must complete a Notice of Intent (NOI) letter, apply for a site permit from the City of Valparaiso, and submit to the City, a sufficient Stormwater Pollution Prevention Plan (SWPPP) which includes erosion and sediment control measures, materials handling procedures and construction sequencing, as part of a project's construction plans and specifications, in accordance with **Division 7.600**, **Permit Requirements and Procedure**.

An individual lot located within a larger permitted project site, regardless of the size of the lot, is considered part of the larger permitted project site, and the individual lot operator must comply with the terms and conditions of the site permit approved for the larger project site. The site permit application for the larger project site must include detailed erosion and sediment control measures for individual lots. In addition, the builders of these individual lots are required to submit individual lot permit application along with an Erosion and Sediment Control Plan for that individual lot prior to receiving a site permit. Details of the permitting process for individual lots and parcels are contained in **Division 7.600**, **Permit Requirements and Procedure**, and additional requirements for individual lots may be found in the City of Valparaiso Stormwater Technical Standards Manual.

For an individual lot or a project where land disturbance is 3,000 square feet or more but less than one (1) acre, and is not located within a larger permitted project site, an individual lot or project site plan including appropriate erosion and sediment control measures that are consistent with the City of Valparaiso Technical Standards is required prior to receiving a site permit.

The required IDEM general and implementation requirements that apply to all land-disturbing activities are contained in the City of Valparaiso Stormwater Technical Standards Manual.

#### C. Site Owner / Permit Holder Responsibilities.

It will be the responsibility of the project site owner to complete a site permit application and ensure that a sufficient construction plan is completed and submitted to the City Engineer in accordance with **Division 7.600**, **Permit Requirements and Procedure**. It will be the responsibility of the project site owner to ensure compliance with this Ordinance during the construction activity and implementation of the construction plan, and to notify the City Engineer upon completion of the project and stabilization of the site, requesting a termination inspection to be performed by the City Engineer. However, all persons engaging in construction and land disturbing activities on a permitted project site meeting the applicability requirements must comply with the requirements of this Division and this Ordinance.

- A.—The following principles apply to all land-disturbing activities and shall be considered in the preparation of a Stormwater Pollution Prevention Plan (SWPPP) within the City:
- B. Minimize the potential for soil erosion by designing development that fits the topography and soils of the site. Deep cuts and fill in areas with steep slopes shall be avoided wherever and whenever possible, and natural contours shall be followed as closely as possible.
- C. Existing natural vegetation shall be retained and protected wherever possible. Areas immediately adjacent (within 35 feet of the top of bank) to watercourses and lakes also shall be left undisturbed wherever possible. Un-vegetated or vegetated areas with less than 70 percent cover that are scheduled or likely to be left inactive for 15 days or more must be temporarily or permanently stabilized with measures appropriate for the season to reduce erosion potential. Alternative measures to site stabilization may be acceptable if the project site owner or their representative can demonstrate they have implemented and maintained erosion and sediment control measures adequate to prevent sediment discharge from the inactive area.
- D.—The selection of soil erosion and sedimentation control measures shall be based on the size of the project, the frequency of climatic events likely to accelerate erosion, the season during which the project is being constructed, the potential for damage should erosion and sedimentation occur, and the requirements for proper maintenance.
- E.—Provision shall be made to accommodate the increased runoff caused by changed surface and soil conditions both during and after development. The length and steepness of designed slopes shall be minimized to reduce erosion potential. Drainage channels and swales must be designed and adequately protected so that their final gradients and resultant velocities will not cause erosion in the receiving channel or at the outlet. Methods for determining acceptable velocities are included in the City's Stormwater Technical Standards Manual.
- F. Sediment-laden water which otherwise would flow from the project site shall be treated by erosion and sediment control measures appropriate to minimize sedimentation. A stable and erosion resistant construction site access point (i.e., crushed stone, slag, aggregate, etc.) shall be provided at all points of construction traffic ingress and egress to the project site. Crushed stone, slag, and or aggregate shall be at least six inches deep from the surface elevation and such material shall be between three and five inches in diameter.
- G. Appropriate measures shall be implemented to prevent wastes or unused building materials, including garbage, debris, packaging materials, fuels and petroleum products, hazardous materials or wastes, cleaning wastes, wastewater, concrete truck washout, and other substances from being carried from a project site by runoff or wind. Identification of the area where concrete truck washout is permissible must be clearly posted on the site. Only one washout location shall be allowed for each building site. Wastes and unused building materials shall be managed and disposed of in accordance with all applicable State statutes and regulations. Proper storage and handling of materials such as fuels or hazardous wastes, and spill prevention and cleanup measures shall be implemented to minimize the potential for pollutants to contaminate surface or ground water or degrade soil quality.

- H.—Public or private roadways shall be kept cleared of accumulated sediment that is a result of runoff or tracking. Bulk clearing of accumulated sediment shall not include flushing the area with water. Cleared sediment shall be redistributed or disposed of in a manner that is in accordance with all applicable statutes and regulations.
- I.—Any proposed detention basin shall be utilized during construction as a sediment basin to trap as much soil as possible during the land disturbing activity. Such basins shall be designed for this purpose, utilizing over excavation for temporary sediment storage, temporary perforated standpipes and/or stone filters as required by proper engineering design.
- J.—Collected runoff leaving a project site must be either discharged directly into a well-defined, stable receiving channel, or diffused and released to adjacent property without causing an erosion or pollutant problem to the adjacent property owner.
- K.—Natural features, including wetlands, shall be protected from pollutants associated with stormwater runoff.
- L.—Sequencing of Activities and Improvements.
- M.—All construction activities on a site shall be conducted in a logical sequence so that the smallest practical area of land will be exposed for the shortest practical period of time during development.
- N.—Sediment basins, silt traps, and filters shall be installed prior to the beginning of construction to remove as much sediment as possible from runoff leaving the site or entering watercourses, wetlands, lakes, or reservoirs.
- O.—Permanent vegetation and erosion control structures shall be installed and temporary structures shall be removed prior to the issuance of final occupancy permits.

Ordinance No. 15, 2015

Effective on: 6/23/2015

## Sec. 7.403 Calculations and Design Standards and Specifications

- A. **Determining Total Area of Land Disturbance**. In calculating the total area of land disturbance, for the purposes of determining applicability of this Article to the project, the following guidelines shall be used:
  - 1. Off-site construction activities that provide services (for example, road extensions, sewer, water, and other utilities) to a land disturbing project site, must be considered as a part of the total land disturbance calculation for the project site, when the activity is under the control of the project site owner.
  - 2.—Strip developments will be considered as one project site.
  - 3.2. To determine if multi-lot project sites are regulated by Sec. 7.402, Policy on Stormwater Pollution Prevention, of this rule, the area of land disturbance shall be calculated by adding the total area of land disturbance for improvements, such as roads, utilities, or common areas, and the expected total disturbance on each individual lot, as determined by the following:
    - a. For a single-family residential project site where the lots are one-half acre or more, without regard to the minimum lot size of the applicable zoning district, one-half acre of land disturbance must be used as the expected lot disturbance.
    - b. For a single-family residential project site where the lots are less than one half acre in size, the total lot must be calculated as being disturbed.
    - c. To calculate lot disturbance on all other types of project sites, such as industrial and commercial project sites, a minimum of one acre of land disturbance must be used as the expected lot disturbance, unless the lots are less than one acre in size, in which case the total lot must be calculated as being disturbed.
- B. Design Standards and Specifications. The calculation methods, as well as the type, sizing, and placement of all stormwater pollution prevention measures for construction sites shall meet the design criteria, standards, and specifications set out in the "Indiana Stormwater Quality Manual", or the City's Stormwater Technical Standards Manual, and the product guidance/specifications of the manufacturer. The methods and procedures included in these two manuals references are in keeping with the above stated policy and meet the requirements of IDEM's Rule 5CSGP.

The design requirements that would apply to all land-disturbing activities and shall be considered in the selection, design, and implementation of all stormwater quality and management measures contained in the SWPPP are contained in the City of Valparaiso Stormwater Technical Standards Manual.

Ordinance No. 15, 2015

Effective on: 6/23/2015

## Sec. 7.404 Inspection, Maintenance, Record Keeping, and Reporting

- A. **Authority to Inspect**. Following approval of <u>the development plans and issuance of</u> the site permit, <u>and commencement of construction activities</u>, representatives of the City Engineer and Valparaiso City Utilities have the authority to conduct inspections of the site to ensure full compliance with the provisions of this Article, the <u>Indiana Stormwater Quality Manualapproved development plan</u>, and the terms and conditions of the approved permit.
- B. Implementation and Maintenance. The project site owner and/or permit holder is responsible for implementing and maintaining, in accordance with this Article, all measures necessary to adequately prevent polluted stormwater runoff. All erosion control measures shall be maintained throughout the course of the construction or until the growth of vegetation has made them unnecessary.
- C.B. Monitoring. For all the construction sites except those that involve less than one acre of land and are not located within larger permitted project sites, For the projects meeting the coverage requirements of IDEM's CSGP, the following requirements in this Division also apply. -a-A self-monitoring program must be implemented by the project site owner and/or permit holder to ensure the Stormwater Pollution Prevention Plan is working effectively. A trained individual, acceptable to the City Engineer, shall monitor and manage project construction and stormwater activities, and complete the self-monitoring reports. perform a written evaluation of the project site by the end of the next business day following each measurable storm event. There shall be one designated on-site person to complete such evaluations, maintain a storm log, and to be contacted in the event of any concerns. An alternate shall be identified in the event that the designated monitor is unavailable. If there are no measurable storm events within a given week, the site shall be monitored at least once in that week. Weekly inspections by the trained individual shall continue until the entire site has been stabilized and a Notice of Termination has been issued. The trained individual shall look at the maintenance of existing stormwater pollution prevention measures, including erosion and sediment control measures, drainage structures, and construction materials storage/containment facilities, to ensure they are functioning properly. The trained individual shall also identify additional measures, beyond those originally identified in the Stormwater Pollution Prevention Plan, necessary to remain in compliance with all applicable statutes and regulations. Details regarding the required monitoring activities are contained in the City of Valparaiso Stormwater Technical Standards Manual.
- D.—Evaluation Reports. The resulting self-monitoring reports must include:
  - 1.—The name of the individual performing the evaluation;
  - 2.—The date of the evaluation;
  - 3.—Problems identified at the project site; and
  - 4.—Details of maintenance, additional measures, and corrective actions recommended and completed.
- C. Adequacy. The Stormwater Pollution Prevention Plan shall serve as a guideline for stormwater quality, but shall not be interpreted to be the only basis for implementation of stormwater quality measures for a project site. The project site owner is responsible for implementing, in accordance with this Division, all measures necessary to adequately prevent polluted stormwater runoff. Recommendations by the trained individual and/or the representative of the City Engineer and Valparaiso City Utilities throughout the course of construction for modified stormwater quality measures shall be implemented.
- F.D. Project Management Log. A project management log must be maintained at the project site or in the possession of on-site individuals associated with the management and operations of the construction activities.

  Details regarding requirements related to the project management log are contained in the City of Valparaiso Stormwater Technical Standards Manual.

F.E. Right to Request Records. Although self-monitoring reports do not need to be submitted to the City Engineer, the City Engineer has the right to request complete records of maintenance and monitoring activities involving stormwater pollution prevention measures. Upon request, all evaluation reports for the project site must be made available to the City Engineer, in an organized fashion, within 48 hours. All evaluation reports must be made available to the City Engineer, in an organized fashion, within forty-eight (48) hours upon request. The Stormwater Pollution Prevention Plan and the project management log must be retained for at least three (3) years from the date the project permit is terminated.

Ordinance No. 15, 2015

Effective on: 6/23/2015

# DIVISION 7.500 STORMWATER QUALITY MANAGEMENT FOR POST-CONSTRUCTION

# Sec. 7.501 Applicability, Exemptions, and Site Owner/Permit Holder Responsibilities

- A. **Generally**. In addition to the requirements of **Division 7.400**, **Stormwater Pollution Prevention for Construction Sites**, the Stormwater Pollution Prevention Plan, which is to be submitted to the City Engineer as part of the site permit application, must also include post-construction stormwater quality measures. These measures are incorporated as a permanent feature into the site plan and are left in place following completion of construction activities to continuously treat stormwater runoff from the stabilized site.
- B. Applicability. Any project located within the corporate boundaries of the City that includes clearing, grading, excavation, and other land disturbing activities, resulting in the disturbance of or impact on one acre or more of total land area. is subject to the requirements of this Article, which includes both new development and redevelopment, and disturbances of less than one acre of land that are part of a larger common plan of development or sale if the larger common plan will ultimately disturb one or more acres of land, within the City. In addition, regardless of the amount of disturbance, the City Engineer reserves the right to require pre-treatment BMPs for proposed hot spot developments in accordance with provisions contained in the City of Valparaiso Stormwater Technical Standards Manual.
- C. **Exemptions**. The requirements of this Article do not apply to the following activities:
  - 1. Agricultural land disturbing activities;
  - 2. Forest harvesting activities:
  - 3. Construction activities associated with a single family residential dwelling disturbing less than five—5 acres one (1) acre, when the dwelling is not part of a larger common plan of development or sale;
  - 4.—Single family residential developments consisting of four or fewer lots;
  - 5.—A single-family residential strip development where the developer offers for sale or lease without land improvements and the project is not part of a larger common plan of development of sale; or
  - 6.4. Individual building lots within a larger permitted project.
  - 7.5. Provided other applicable State permits contain provisions requiring immediate implementation of soil erosion control measures, the following activities do not apply:
    - a. Landfills that have been issued a certification of closure under **329 IAC 10**;
    - b. Coal mining activities permitted under IC 14-34; and
    - c. Municipal solid waste landfills that are accepting waste pursuant to a permit issued by the Indiana Department of Environmental Management under **329 IAC 10** that contains equivalent stormwater requirements, including the expansion of landfill boundaries and construction of new cells either within or outside the original solid waste permit boundary.
- D. **Site Owner / Permit Holder Responsibilities**. It will be the responsibility of the project site owner to complete a site permit application and ensure that a sufficient construction plan is completed and submitted to the City Engineer in accordance with **Sec. 15.305, Stormwater Management Plans and Permitting Procedures**.

**Division 7.600, Permit Requirements and Procedure.** It will be the responsibility of the project site owner and/or permit holder to ensure proper construction and installation of all stormwater Best Management Practices (especially, the protection of post-construction stormwater BMPs during construction phase) in compliance with this Article and with the approved site permit, and to notify the City Engineer with a sufficient notice of termination letter upon completion of the project and stabilization of the site. However, all eventual property owners of stormwater quality management facilities meeting the applicability requirements must comply with the requirements of this Article and this UDO.

Ordinance No. 15, 2015
Effective on: 6/22/2015

## 7.502 Policy on Stormwater Quality Management

- A. Generally. It is recognized that developed areas, as compared to undeveloped areas, generally have increased imperviousness, decreased infiltration rates, increased runoff rates, and increased concentrations of pollutants fertilizers, herbicides, oil. salts and other pollutants. such greases, As new development and redevelopment continues in the City, measures must be taken to intercept and filter pollutants from stormwater runoff prior to reaching regional creeks, streams, and rivers. Through the use of Best Management Practices (BMPs), stormwater runoff will be filtered and harmful amounts of sediment, nutrients, and contaminants will be removed. The City has established a minimum standard that the measurement of the effectiveness of the control of stormwater quality will be based on the management of Total Suspended Solids (TSS). Through the use of appropriate Best Management Practices (BMPs), to treat the Water Quality Volume (WQv) or the Water Quality Flow (Qwq) stormwater runoff will be filtered and harmful amounts of sediment, nutrients, and contaminants will be removed.
- B. Best Management Practices. The project site owner must submit to the City Engineer, a Stormwater Pollution Prevention Plan (SWPPP) that shows placement of appropriate Best Management Practices (BMPs) from a preapproved list of BMPs specified in the City's Stormwater Technical Standards Manual. The SWPPP submittal shall include an Operation and Maintenance Manual for all post-construction BMP(s) included in the project and a signed Maintenance Agreement providing for the long-term maintenance of those BMPs. The noted BMPs must be designed, constructed, and maintained according to guidelines provided or referenced in the City's Stormwater Technical Standards Manual. Practices other than those specified in the pre-approved list may be utilized; however, the burden of proof as to whether the performance (minimum 80 percent TSS removal) and ease of maintenance of such practices will be according to the guidelines provided in the City's Stormwater Technical Standards Manual, would be placed with the applicant. Details regarding the procedures and criteria for consideration of acceptance of such BMPs are provided in the City's Stormwater Technical Standards Manual.
- C. **Special Practices for Highly Sensitive Uses**. Gasoline outlets and refueling areas must install appropriate practices <u>(as noted under "Hot Spots" provision in the Technical Standards)</u> to reduce lead, copper, zinc, and hydrocarbons in stormwater runoff. These requirements will apply to all new facilities and existing facilities that replace their tanks, <u>regardless of the size of the facility</u>. <u>Discharges from new development and redevelopment sites will not be allowed directly into karst features without pre-treatment</u>.

Ordinance No. 15, 2015

Effective on: 6/23/2015

# Sec. 7.503 Calculations and Design Standards and Specifications

- A. **Means of Calculation**. Calculation of land disturbance shall follow the guidelines set out in **Sec. 7.403**, **Calculations and Design Standards and Specifications**.
- B. **Required Compliance**. The calculation methods as well as the type, sizing, and placement of all stormwater quality management measures, or BMPs shall meet the design criteria, standards, and specifications outlined in the Indiana Stormwater Quality Manual or the City's Stormwater Technical Standards Manual. The methods and procedures included in these two manuals the referenced Standards are in keeping with the stated policy of this Article and meet or exceed the requirements of IDEM's Rule 13MS4GP.

## Sec. 7.504 Easement Requirements

All stormwater quality management systems, including detention or retention basins, filter strips, pocket wetlands, in-line filters, infiltration systems, conveyance systems, structures and appurtenances located outside of the right-of-way shall be incorporated into permanent easements. For the purposes of monitoring, inspection, and general maintenance activities, a 30-foot wide perimeter adequate easement width, as detailed in the City of Valparaiso Stormwater Technical Standards Manual, beyond the actual footprint of the stormwater quality management facility, as well as a 30-foot wide access easement from a public right-of-way to each BMP, shall be provided, unless otherwise authorized by City Engineer.

Ordinance No. 15, 2015

Effective on: 6/23/2015

## Sec. 7.505 Inspection, Maintenance, Record Keeping, and Reporting

- A. **Authority to Inspect**. After the approval of the site permit by the City Engineer and the commencement of construction activities, representatives of the City Engineer and Valparaiso City Utilities have the authority to conduct inspections of the work being done to ensure full compliance with the provisions of this Article, the approved Stormwater Pollution Prevention Plan, the City's Stormwater Technical Standards Manual, and the terms and conditions of the approved permit.
- B. **Required Operation and Maintenance**. Stormwater quality management facilities shall be maintained in good condition, in accordance with the operation and maintenance procedures and schedules listed in the **Indiana Stormwater Quality Manual** or the City's Stormwater Technical Standards Manual, and the terms and conditions of the approved site permit in addition to the designed and approved performance specifications for the facilities. Such facilities shall not be subsequently altered, revised, or replaced except in accordance with the approved site permit, or in accordance with approved amendments or revisions in the permit as approved by the City Engineer.
- C. **Long-Term Responsibility**. Following construction completion, maintenance of stormwater quality facilities shall be the long-term responsibility of the facility's owner. <u>Details regarding the required stormwater BMP Maintenance Agreement</u>, and <u>Operations and Maintenance (0&M) Manual are provided in the City of Valparaiso Stormwater Technical Standards Manual</u>.
- D. **Inspections**. The City Engineer has representatives of the City Engineer and Valparaiso City Utilities have the authority to perform long-term, post-construction inspection of all public or privately owned stormwater quality facilities. The inspections will follow the operation and maintenance procedures included in the City's Stormwater Technical Standards Manual and/or permit application for each specific Best Management Practice (BMP). The inspection will cover physical conditions, available water quality storage capacity, and the operational condition of key facility elements. Noted deficiencies and recommended corrective action will be included in an inspection report. If deficiencies are found during the inspection, the owner of the facility will be notified by the City Engineer and will be required to take all necessary measures to correct such deficiencies. If the owner fails to correct the deficiencies within the allowed time period, as specified in the notification letter, the Valparaiso City Utilities Board will undertake the work and collect from the owner using lien rights if necessary.

Ordinance No. 15, 2015

Effective on: 6/23/2015

DIVISION 7.600 DEVELOPMENT IN WETLANDS REGULATIONS PERMIT REQUIREMENTS AND PROCEDURES

## Sec. 7.601 Applicability and Exemptions Conceptual Drainage Plan Review

- A. Generally. It is the public policy of the City to preserve, protect, and conserve freshwater wetlands, and the benefits derived wherefrom, to prevent the despoliation and destruction of freshwater wetlands, and to regulate use and development of such wetlands to secure the natural benefits of freshwater wetlands, consistent with the general welfare and beneficial to economic, social, and agricultural development of the City.
- B. Applicability. This Division shall apply to all land-disturbing activities regulated by this Article. No site permit shall be issued and no land disturbance started for any construction in a development identified as containing wetlands until the owner has obtained all required state and federal permits or releases related to the dredging or filling of wetlands. As a pre-condition to receiving a building or land disturbance permit for a development identified as containing wetlands where the applicant for the permit does not intend to fill a wetland, such unaffected wetland must be identified in one of the methods enumerated in Sec. 7.602, Wetlands Identification, shown on the proposed development plans, and submitted to the City Engineer along with plans to protect and avoid any disturbance to such unaffected wetland.
- C.—Exemptions. The requirements of this Division do not apply to the following:
  - 1.—Artificially-constructed ponds, drainage ditches, stormwater retention/detention basins, and treatment lagoons that exist at the site and that may appear to display wetland-like properties. However, the applicant would need to independently contact IDEM or the U.S. Army Corps of Engineers (USACE) for appropriate Federal and State requirements;
  - 2. Wetlands or portions thereof for which Federal or State permits for fill were issued prior to the enactment of this Division; or
  - 3.—Any area or use excluded from local planning and zoning jurisdiction by Federal or State law.
- D. Responsibility of Site Owner. It will be the responsibility of the project site owner to complete a site permit application and ensure that all wetlands identified to be present at the project site are sufficiently protected and preserved as set out in this Division.

Ordinance No. 15, 2015

Effective on: 6/23/2015

- A. **Generally.** In order to gain an understanding of the drainage requirements for a specific project, a developer may submit conceptual drainage plans and calculations for review by the City Engineer. The direction provided by the City Engineer during such a review is based on preliminary data and shall not be construed as an acceptance or binding on either party.
- B. **Data Requirements.** The following is a general listing of minimum data requirements for the review of conceptual drainage plans:
  - 1. Conceptual plans showing general project layout, including existing and proposed drainage systems.
  - 2. General description of the existing and proposed drainage systems in narrative form.
  - 3. Map showing on-site 100-year floodplain and floodway (please note if none exists).
  - 4. Map showing all wetlands, lakes, and ponds on or adjacent to the site.
  - 5. Existing watercourse or regulated drains.
  - 6. Watershed Boundaries with USGS Contours or best information possible.
  - 7. Drainage calculations detailing existing and proposed discharges from the site.
  - 8. Letter of Intent for obtaining any needed consents, off-site easements, right-of-way, or regulatory permits.

## Sec. 7.602 Wetlands Identification Permit Procedures

A. Means for Identification, Delineation and Existence of Wetlands. In implementing the terms of this Division, any of the following materials shall be prima facia evidence which may be relied upon by the City Engineer for the identification, delineation, and existence of a wetland:

- 1.—National Wetlands Inventory (NWI) maps produced or maintained by the United States Fish and Wildlife Service (USFWS);
- 2.—Maps produced, or maintained and utilized, by the United States Army Corps of Engineers (USACE) for identification and/or delineation of wetlands;
- 3.—Maps produced, or maintained and utilized, by the United States Natural Resources Conservation Service (NRCS) for the identification and/or delineation of wetlands;
- 4.—USDA NRCS Soil Survey of the City hydric soils list; or
- 5. Field investigations performed by the United States Army Corps of Engineers (USACE) or private consultants recognized by the Corps as authorities in wetland identification and delineation.

#### B. Notes:

- 1.—National Wetlands Inventory (NWI) maps are intended to identify potential wetlands. Due to the lack of field verification, NWI classified wetlands are sometimes erroneously identified, missed, or misidentified. Additionally, the criteria used in identifying these wetlands, as established by USFWS, are different from those currently used by the U.S. Army Corps of Engineers. NWI maps best serve as an indicator of potential jurisdictional wetlands.
- 2.—Soil survey maps were developed from actual field investigations by soil scientists from the NRCS but they address only one of the three required wetland criteria and may reflect historical conditions rather than current site conditions.
- 3. It is recommended that all sites be field reviewed by a qualified person with experience in wetland identification in order to determine the presence or absence of wetlands.

Ordinance No. 15, 2015

Effective on: 6/22/2015

- A. Applicability. This Division applies to all development, or re-development of land, that results in land disturbance of one (1) acre or more. Individual lots with land disturbance less than one (1) acre but more than 3,000 square feet, or individual lots that are developed within a larger permitted project site, shall refer to Sec. 7.604, Review of Individual Lots, for plan review requirements and procedures.
- **B. General Procedures.** The following are the general procedures from applying for, to renewing and terminating a permit:
  - 1. To pull a site permit, the project site owner shall submit an application to the City Engineer. The application will include construction plan sheets, a stormwater drainage technical report, a stormwater pollution prevention plan, and any other necessary support information. Specific information to be included in the application can be found in **Sec. 7.603**, **Information Requirements**.
  - 2. After the City Engineer's receipt of the application, the applicant will be notified as to whether their application was complete or insufficient. The applicant will be asked for additional information if the application is insufficient. Once all comments have been received and review completed, the City Engineer will either approve the project, or request modifications.
  - 3. Once the plans are approved, a Construction/Stormwater Pollution Prevention Plan Technical Review and Comment form and a Site Permit will be issued. The project site owner must file a Notice of Intent to IDEM through IDEM's Regulatory ePortal a minimum of 48 hours prior to the commencement of construction activities. The project site owner shall notify the City of Valparaiso before beginning construction. A pre-construction meeting is required to be held prior to any grading activity to ensure that appropriate perimeter control measures have been implemented on the site and the location of any existing tiles have been properly marked.
  - 4. Once construction starts, the project owner shall monitor construction activities and inspect all stormwater pollution prevention measures in compliance with this Ordinance and the terms and conditions of the approved permit.

- 5. Upon completion of construction activities, as-built plans must be submitted to the City of Valparaiso. Once the construction site has been stabilized and all temporary erosion and sediment control measures have been removed, a notification shall be sent to the City of Valparaiso, requesting a termination inspection. The City of Valparaiso, or its representative, shall inspect the construction site to verify that the completed project is fully stabilized and meets the requirements of City of Valparaiso's Stormwater Ordinance and its technical standards, and that the terms and conditions of the permit. Once the applicant receives a signed copy of the Termination Inspection Checklist confirming compliance, they must forward a copy to IDEM along with the required IDEM NOT form.
- 6. Permits issued under this scenario will expire 3 years from the date of issuance. If construction is not completed within 3 years, an updated permit application must be submitted to the City of Valparaiso. If construction is not completed within 5 years, an updated NOI must be resubmitted to IDEM at least 90 days prior to expiration.
- C. SWPPP Review Time Limits. Pursuant to IC 13-18-27, an MS4-designated entity or other review authority such as SWCD must make a preliminary determination as to whether the construction plan associated with SWPPP is substantially complete before the end of the tenth (10th) working day (for sites with less than 5 acres of land disturbance) after the day on which the SWPPP is submitted to the review authority or the fourteenth (14th) working day (for sites with 5 acres or larger of land disturbance) after the day on which the SWPPP is submitted to the review authority. Depending on the outcome of the SWPPP review, the following scenarios may play out. These time limits only apply to the SWPPP portion of the overall permit submittal and do not affect any official or non-official permit review timelines set by the entity for other aspects of the permit application.
  - 1. No SWPPP review notification received. If the review authority does not notify the applicant of its preliminary determination as to whether the construction plan is substantially complete within either 10 or 14 days as noted above, the project site owner may submit a notice of intent letter to IDEM including the information required this Ordinance and the City of Valparaiso Stormwater Technical Standards Manual, and 48 hours after the NOI is submitted to IDEM, may begin the construction project including the land disturbing activities of the construction project, provided that all the other necessary permits have been obtained.
  - 2. SWPPP not substantially complete. If the review authority notifies the applicant that the construction plan is not substantially complete, the project site owner may not submit a notice of intent letter to IDEM until the review authority makes a conclusive favorable determination concerning the construction plan under this Ordinance and the City of Valparaiso Stormwater Technical Standards Manual.
  - 3. *Unfavorable SWPPP.* If the review authority notifies the applicant that the construction plan is deficient and makes a conclusive unfavorable determination concerning the construction plan under this Ordinance and the City of Valparaiso Stormwater Technical Standards Manual, the project site owner may not submit a notice of intent letter to IDEM.
  - 4. Preliminary SWPPP review. If the review authority notifies the applicant that the construction plan is substantially complete and a preliminary review has been completed, the project site owner may submit a notice of intent letter to IDEM including the information required by IDEM, or this Ordinance and the City of Valparaiso Stormwater Technical Standards Manual, and 48 hours after the NOI is submitted to IDEM, may begin the construction project, including the land disturbing activities of the construction project, provided that all the other necessary permits have been obtained. The plan review authority reserves the right to perform a comprehensive review at a later date, and revisions may be required at that time.
  - 5. Conditional SWPPP review. If the review authority notifies the applicant that the construction plan is substantially complete and a conditional review has been completed, the project site owner may submit a notice of intent letter to IDEM including the information required by IDEM, or this Ordinance and the City of Valparaiso Stormwater Technical Standards Manual, and 48 hours after the NOI is submitted to IDEM, may begin the construction project, including the land disturbing activities of the construction project provided that the requirements included in the conditional review are fulfilled and all the other necessary permits have been obtained.

6. Favorable SWPPP review. If the review authority notifies the applicant that the construction plan is substantially complete and a comprehensive review has been completed, the project site owner may submit a notice of intent letter to IDEM including the information required by IDEM, or this Ordinance and the City of Valparaiso Stormwater Technical Standards Manual, and 48 hours after the NOI is submitted to IDEM, may begin the construction project, including the land disturbing activities of the construction project, provided that all the other necessary permits have been obtained.

## Sec. 7.603 Information Requirements

- A. Exemptions. Specific projects or activities may be exempt from all or part of the informational requirements listed below. Exemptions are detailed in the "Applicability and Exemptions" sections of Division 7.200, Prohibited Discharges and Connections, through Division 7.500, Stormwater Quality Management for Post-Construction. If a project or activity is exempt from any or all requirements of this ordinance, an application should be filed listing the exemption criteria met, in lieu of the information requirements listed below. This level of detailed information is not required from individual lots, disturbing less than 1 acre of land, or developed within a larger permitted project site. Review and acceptance of such lots is covered under Sec. 7.604, Review of Individual Lots, below.
- B. Permit submittal elements. The different elements of a permit submittal include construction plans, a stormwater drainage technical report, a stormwater pollution prevention plan for active construction sites, a post-construction stormwater pollution prevention plan, post-construction BMP Operation and Maintenance Manual, and any other necessary supporting information. All plans, reports, calculations, and narratives shall be signed and sealed by a professional engineer or a licensed surveyor, registered in the State of Indiana who also meets the definition of a Trained Individual found in Article 18, Definitions.
  - 1. Construction Plans. Construction plan sheets and an accompanying narrative report shall describe and depict the existing and proposed conditions. Note that in order to gain an understanding of and to evaluate the relationship between the proposed improvements for a specific project section/phase and the proposed improvements for an overall multi-section (phased) project, the detailed information requested herein for the first section/phase being permitted must be accompanied by an overall project plan that includes the location, dimensions, and supporting analyses of all detention/retention facilities, primary conveyance facilities, and outlet conditions. Construction plans must include items listed in the information submission checklist provided in the City of Valparaiso Stormwater Technical Standards Manual, Appendix B.
  - 2. Stormwater Drainage Technical Report. A written stormwater drainage technical report must contain a discussion of the steps taken in the design of the stormwater drainage system. Note that in order to gain an understanding of and to evaluate the relationship between the proposed improvements for a specific project section/phase and the proposed improvements for an overall multi-section (phased) project, the detailed information requested herein for the first section/phase being permitted must be accompanied by an overall project plan that includes the location, dimensions, and supporting analyses of all detention/retention facilities, primary conveyance facilities, and outlet conditions. The technical report needs to include items listed in the information submission checklist provided in the City of Valparaiso Stormwater Technical Standards Manual.
  - 3. Stormwater Pollution Prevention Plan for Construction Sites. For sites with total disturbance of one (1) acre or more, a stormwater pollution prevention plan associated with construction activities must be designed to, at least, meet the requirements of this Ordinance. The SWPPP and construction plans must include the items listed in the information submission checklist provided in the City of Valparaiso Stormwater Technical Standards Manual. For land disturbances totaling 3,000 square feet or more of land area but less than one (1) acre, appropriate erosion and sediment control measures that are consistent with the City of Valparaiso Technical Standards must be designed and shown on the plans.

4. Post-Construction Stormwater Pollution Prevention Plan and O&M Manual. For sites with total land disturbance of one (1) acre or more of total land area, a post-construction stormwater pollution prevention plan must be designed to, at least, meet the requirements of this Ordinance and must include the information provided in the City of Valparaiso Stormwater Technical Standards Manual. The post-construction stormwater pollution prevention plan must include items listed in the information submission checklist provided in the City of Valparaiso Stormwater Technical Standards Manual. For such sites, an Operations and Maintenance Manual (O&M Manual) is required to facilitate the proper long-term function of all post-construction stormwater quality measures. The detailed requirements of the manual are provided in the City of Valparaiso Stormwater Technical Standards Manual.

## Sec. 7.604 Review of Individual Lots

- A. **Generally.** For individual lots, or projects disturbing land between 3,000 square feet and one acre, a formal review of individual lot/project plan and issuance of a site permit to the lot/project is required. Similarly, for individual lots disturbing less than 3,000 square feet of total land area, developed within a larger permitted project, a formal review of lot plan and issuance of a site permit will be required. All stormwater management measures necessary to comply with this Ordinance must be implemented in accordance with the permitted plan for the larger project.
- **B. Required information.** The following information must be submitted to the City of Valparaiso, for review and acceptance, by the individual lot operator, whether owning the property or acting as the agent of the property owner, as part of a request for review and issuance of a site permit.
  - 1. A site layout for the subject lot and all adjacent lots showing building pad location, dimensions, and elevations, and the drainage patterns and swales.
  - 2. Erosion and sediment control plan that, at a minimum, includes the following measures:
    - a. Installation and maintenance of a stable construction site access.
    - b. Installation and maintenance of appropriate perimeter erosion and sediment control measures prior to land disturbance.
    - c. Minimization of sediment discharge and tracking from the lot.
    - d. Clean-up of sediment that is either tracked or washed onto roads. Bulk clearing of sediment shall not include flushing the area with water. Cleared sediment must be redistributed or disposed of in a manner that is in compliance with all applicable statutes and rules.
    - e. Implementation of concrete or cementitious wash water practices that securely contain and allow for the proper disposal of concrete or cementitious wash water.
    - f. Adjacent lots disturbed by an individual lot operator must be repaired and stabilized with temporary or permanent surface stabilization.
    - g. Self-monitoring program including plan and procedures.
- C. Individual lot within a development covered by CSGP. For residential developments where an individual lot operator has purchased one or more lot within an active permitted development that has permit coverage under IDEM's CSGP, the individual lot operator shall submit to the City a completed Construction Stormwater Residential Development Registration form prior to the issuance of site permit. The purpose of this form is to establish responsibility for an individual lot operator to comply with specific requirements of the permit for the larger project, as approved by the City of Valparaiso. The individual lot operator is responsible for installation and maintenance of all erosion and sediment control measures until the site is stabilized.

# Sec. 7.605 Changes to Plans

Any changes or deviations in the detailed plans and specifications after approval of the applicable site permit shall be filed with, and accepted by, the City of Valparaiso prior to the land development involving the change. Copies of the changes, if accepted, shall be attached to the original plans and specifications.

#### Sec. 7.606 Fee Structure

#### Sec. 7.607 Required Assurances

Refer to City of Valparaiso General Construction Specification for information on required assurances.

## Sec. 7.608 Terms and Conditions of Permits

- **A. Generally.** In granting a Site Permit, the City of Valparaiso may impose such terms and conditions as are reasonably necessary to meet the purposes of this Ordinance.
- B. Responsibility. The project site owner shall insure compliance with such terms and conditions. Non-compliance with the terms and conditions of permits will be subject to enforcement as described in Article 17, Enforcement, Interpretation, and Repealer. The project site owner shall inform all general contractor, construction management firms, grading or excavating contractors, utility contractors, and the contractors that have primary oversight on individual building lots of the terms and conditions of the Site Permit and the schedule for proposed implementation. In the event that a project site is determined to impact or discharge to a Sensitive Area or is located in an Impact Drainage Area, the City of Valparaiso may require more stringent stormwater quantity and quality measures than detailed in this Ordinance or in the *Indiana Stormwater Quality Manual*.

#### C. Determination of Sensitive Areas

- 1. Sensitive areas. Sensitive Areas include highly erodible soils, wetlands, karst areas, threatened or endangered species habitat, outstanding waters, impaired waters, recreational waters, and surface drinking water sources.
- 2. Class V injection well. Any discharge from a stormwater practice that is a Class V injection well shall meet the Indiana groundwater quality standards and registered with US EPA as required by the IDEM.
- 3. Wetlands. If wetlands are suspected on a site, a wetland determination, followed by a delineation if wetlands are confirmed, should be completed in accordance with the methodology established by the U.S. Army Corps of Engineers (USACE). Any of the following materials shall be prima facia evidence which may be relied upon by the City Engineer for the identification, delineation, and existence of a wetland: (a) National Wetlands Inventory (NWI) maps produced or maintained by the U. S. Fish and Wildlife Service (USFWS); (b) maps produced, or maintained and utilized, by the USACE for identification and/or delineation of wetlands; (c) maps produced, or maintained and utilized, by the U. S. Natural Resources Conservation Service (NRCS) for the identification and/or delineation of wetlands; (d) USDA-NRCS Soil Survey of the City of Valparaiso hydric soils list; and (e) field investigations performed by the USACE or private consultants recognized by the Corps as authorities in wetland identification and delineation. Note: the NWI maps are intended to identify potential wetlands. Due to the lack of field verification, NWI classified wetlands are sometimes erroneously identified, missed, or misidentified. Additionally, the criterial used in identifying these wetlands, as established by USFWS, are different from those currently used by the USACE. NWI maps best serve as an indicator of potential jurisdictional wetlands. Likewise, soil survey maps were developed from actual field investigations by soil scientists from the NRCS but they address only one of the three required wetland criteria and may reflect historical conditions rather than current site conditions. It is recommended that all sites be field reviewed by a qualified person with experience in wetland identification in order to determine the presence or absence of wetlands.
- 4. Threatened or endangered species habitat. The need for the applicant to check for the presence of threatened or endangered species habitat will be determined on a case-by-case basis. Special terms and conditions for development determined to impact or discharge to any Sensitive Area shall be included in the Site Permit.

## D. Determination of Impact Drainage Areas

The City of Valparaiso or City of Valparaiso Engineer is authorized, but is not required, to classify certain geographical areas as Impact Drainage Areas. In determining Impact Drainage Areas, the City of Valparaiso may consider such factors as topography, soil type, capacity of existing drains, and distance from adequate drainage facility. Land that does not have an adequate outlet, taking into consideration the capacity and depth of the outlet, may be designated as an Impact Drainage Area by the City Engineer. Special terms and conditions for development

within any Impact Drainage Area shall be included in the Site Permit. The following areas shall be designated as Impact Drainage Areas, unless good reason for not including them is presented to the City of Valparaiso.

- 1. A floodway or floodplain as designated by the most updated FEMA Code dealing with floodplain regulation and/or by the Best Available Data through IDNR.
- 2. Land within 25 feet of each bank of any ditch within the City of Valparaiso's system.
- 3. Land within 15 feet of the centerline of any stormwater infrastructure or enclosed conduit within the City of Valparaiso's system.
- 4. Land within 75 feet of each bank of a county open regulated drain.
- 5. Land within 50 feet of a natural drainageway.
- 6. Land within 75 feet of the centerline of any tiled regulated drain.

## Sec. 7.609 Certification of As-Built Plans and Visual Recordings

- **A. Applicability.** This Division shall apply to all projects whether the stormwater management system or portions thereof will be dedicated to the City of Valparaiso or retained privately.
- B. As-Built Requirements. After completion of construction of the project, a professionally prepared and certified 'as-built' set of plans by a Professional Engineer or licensed Land Surveyor registered in the State of Indiana shall be submitted to the City Engineer for review. Additionally, a digital copy of the 'as-built' plans is required in a format acceptable to the City Engineer. As-Built plans shall include all pertinent data relevant to the completed stormwater drainage system and stormwater management facilities, and shall include:
  - 1. Pipe size and pipe material
  - 2. Invert elevations
  - 3. Top rim elevations
  - 4. Elevation of the emergency overflow (spillway) for ponds
  - 5. Grades along the emergency flood routing path(s)
  - 6. Pipe structure lengths
  - 7. BMP types, dimensions, and boundaries/easements
  - 8. "As-planted" plans for BMPs, as applicable
  - 9. Data and calculations showing detention basin storage volume
  - 10. Data and calculations showing BMP treatment capacity
  - 11. Certified statement on plans stating the completed stormwater drainage system and stormwater management facilities substantially comply with construction plans as approved by the City Engineer (See certificate in the Stormwater Technical Standards Manual).
- C. Visual Recording Requirements. In addition to As-Built Plans, to verify that all enclosed drains are functioning properly, visual recordings (via closed circuit television) of such drains shall be required, once following the completion of installation (including the installation of all utility mains). The details on the television requirements are provided in the City's General Construction Specifications.

# Sec. 7.610 Post-Project Maintenance Bond and Verifications

In addition to as-built plans and the certification of completion and compliance, following the release of performance assurances, the property owner, developer, or contractor shall be required to file a maintenance bond or other acceptable guarantee with the City of Valparaiso in a form satisfactory to the City of Valparaiso in order to assure that such stormwater system installation was done according to standards of good workmanship, that the materials used in the construction and installation were of good quality and construction, and that such project was done in accordance with the accepted plans, and this Ordinance and that any off-site drainage problems that may arise, whether upstream or downstream of such project, will be corrected if such drainage problems are determined by City of Valparaiso to have been caused by the development of such project. The details of the requirements on the

bond or other acceptable guarantee are provided in **Article 15**, **Permits and Procedures**, and the City of Valparaiso General Construction Specification.

www.ci.valparaiso.in.us
Powered by (NCODE PLUS

Copyright 2024 enCodePlus, LLCAll Rights Reserved

#### DIVISION 15.300 STANDARDIZED DEVELOPMENT APPROVAL PROCEDURES

## Sec. 15.305 Stormwater Management Plans and Permitting Procedures

Refer to **Division 7.600**, **Permit Requirements and Procedures**, for stormwater management plans and permitting procedures.

- A. Conceptual <u>Drainage</u> Plan Review. In order to establish that an adequate drainage <u>outlet(s)</u> exists for a proposed <u>development</u> seeking Primary <u>Plat approval</u> in accordance with <u>Division</u> <u>15.800</u>, <u>Subdivision</u> <u>Plat Procedures</u>, or Development Plan approval in accordance with <u>Division</u> <u>15.400</u>, <u>Procedures and Administration for Development Plan Approval</u>, from the Plan Commission or <u>Planning Director</u>, respectively, a <u>developer</u> may apply for a conceptual drainage plan review by the City <u>Engineer</u>. As part of the conceptual drainage plan review, a developer shall submit conceptual drainage plans for review by the City <u>Engineer prior</u> to the Plan Commission hearing for review and approval of a <u>Primary Plat</u> or <u>Planning Director</u> approval for a <u>Development Plan</u>. Any preliminary drainage approval by the <u>Plan Commission</u> (for <u>Primary Plats</u> and other <u>Plan Commission</u> approvals) and/or <u>City Engineer</u> (for <u>Development Plans</u> and other administrative approvals) as a result of such a review is based on preliminary data and shall not be construed as a final drainage approval or considered binding on either party.
  - 1.—Data Requirements. The following is a general listing of minimum data requirements for the review of conceptual drainage plans:
    - a:—Two complete sets of conceptual plans showing general project layout, including existing and proposed drainage systems and proposed outlets;
    - b. General description of the existing and proposed drainage systems in narrative form;
    - c.—Watershed boundaries on County LIDAR 1-foot topographic mapping;
    - d.—Existing watercourse or regulated drains; and
    - e.—Letter of Intent (LOI) for obtaining any needed consents, off-site <u>easements</u>, <u>right-of-way</u>, or regulatory <u>permits</u>.

#### B. Permit Procedures.

- 1.—Applicability. This Section applies to all development, or <u>redevelopment</u> of land, that results in land disturbance of one acre or more. Individual <u>lots</u> with land disturbance less than one acre, or individual lots that are developed within a larger permitted project site, should refer to Subsection, D, Review of Individual Lots, below, for plan review requirements and procedures.
- 2. Application. The project site owner shall submit an application for a site permit to the City Engineer. The application will include:
  - a. Draft Notice of Intent letter (NOI);
  - b. Site permit application form;
  - c. Construction plan sheets;
  - d.—Stormwater drainage technical report;
  - e. Stormwater pollution prevention plan (SWPPP); and
  - f.—Any other necessary support information (see Subsection D, Information Requirements, below)
- 3.—Submission Requirements. Paper copies of each of the above described application materials must be submitted to the City. Additionally, a digital copy of the construction plans is required in a format accepted by the City Engineer.

- 4.—Application Completeness. After the receipt of the application, the <u>applicant</u> will be notified as to whether their application was complete or insufficient, in accordance with Sec. <u>15.307</u>, Application Completeness Review. The applicant will be asked for additional information if the application is insufficient.
- 5.—Approval or Request for Modification. Once all comments have been received and the review is complete, the City Engineer will either approve the project or request modifications.
- 6. Form and Permit Issuance. Once the plans are approved, a Construction / Stormwater Pollution Prevention Plan (SWPPP) Technical Review and Comment form and a Site Permit will be issued.
- 7. Notice of Intent (NOI). The project site owner must file a Notice of Intent (NOI) a minimum of 48 hours prior to the commencement of construction activities. The submittal of the NOI must be provided to the City and the Indiana Department of Environmental Management (IDEM). The submittals must include:

#### a.—IDEM:

- i. Updated NOI form;
- ii.—Proof of publication;
- iii. Plan review verification (the Construction/Stormwater Pollution Prevention Plan Technical Review and Comment form); and
- iv.—The applicable fee established by IDEM.

#### b.—City of Valparaiso:

- i. Copies of the final, approved construction plans;
- ii. Stormwater drainage technical report;
- iii. Stormwater pollution prevention plan (SWPPP) for construction sites;
- iv.—Post-construction stormwater pollution prevention plan;
- v.—Updated NOI form;
- vi. Proof of publication;
- vii. Copy of Notice of Sufficiency (NOS).
- 8. Pre-Construction Meeting. A pre-construction meeting is required to be held prior to any grading activity to ensure that appropriate perimeter control measures have been implemented on the site and the location of any existing tiles have been properly marked.
- 9. *Monitoring*. Once construction starts, the project owner shall monitor construction activities and inspect all stormwater pollution prevention measures in compliance with this UDO and the terms and conditions of the approved permit.
- 10. As Built Plans. Upon completion of construction activities, as built plans must be submitted to the City prior to relase of Occupancy Permit. As Built survey of individual lots shall include Finish Floor Elevation and certification of lot corners.
- 11. Notice of Termination (NOT). A Notice of Termination (NOT) shall be sent to the City and IDEM once the construction site has been stabilized and all temporary erosion and sediment control measures have been removed. Permits issued under this scenario will expire five years from the date of issuance. If construction is not completed within five years, the NOI must be resubmitted at least 90 days prior to expiration.

#### C.—Information Requirements.

1. Exemptions. Specific projects or activities may be exempt from all or part of the informational requirements listed below. Exemptions are detailed in <u>Division 7.300</u>, <u>Stormwater Quantity Management</u>; <u>Division 7.400</u>, <u>Stormwater Pollution Prevention for Construction</u>; and <u>Division 7.500</u>, <u>Stormwater Quality Management for Post-Construction</u>. If a project or activity is exempt from any or all requirements of this UDO, an application shall be filed

listing the exemption criteria met, in lieu of the information requirements listed below. This level of detailed information is not required for individual lots, disturbing or impacting less than one acre of land, or developed within a larger permitted project site. Review and acceptance of such projects is covered under Subsection E, *Review of Individual Lots*.

- 2. Secondary Stormwater Plan Submittals. The different elements of a permit submittal for a Secondary Stormwater Plan approval include:
  - a.—Notice of Intent (NOI);
  - b. Proof of publication of a public notice;
  - c.—Construction plans;
  - d.—Stormwater drainage technical report;
  - e. Stormwater pollution prevention plan (SWPPP) for active construction sites;
  - f.—Post-construction stormwater pollution prevention plan; and
  - g.—Any other necessary supporting information.
- 3.—Signed and Sealed. All plans, reports, calculations, and narratives shall be signed and sealed by a professional engineer or a licensed surveyor, registered in the State of Indiana.
- 4. Construction Plans. Construction plan sheets (not to exceed 24" by 36" in size) and an accompanying narrative report shall describe and depict the existing and proposed conditions. This must be submitted in digital format acceptable to the City Engineer as well as hard copy. Note that in order to gain an understanding of and to evaluate the relationship between the proposed improvements for a specific project section/phase and the proposed improvements for an overall multi-section (phased) project, the detailed information requested for the first section/phase being permitted must be accompanied by an overall project plan that includes the location, dimensions, and supporting analysis of all detention/retention facilities, primary conveyance facilities, and outlet conditions. Construction plans need to include the following detailed items:
  - a.—Title sheet which includes location map, vicinity map, operating authority, design company name, developer name, and index of plan sheets.
  - b.—A copy of a legal boundary survey for the site, performed in accordance with Rule 12, Title 865, Indiana Administrative Code or any applicable and subsequently adopted rule or regulation for the subdivision limits, including all drainage easements and wetlands.
  - c.—A reduced plat or project site map showing the parcel identification numbers, lot numbers, lot boundaries, easements, and road layout and names. The reduced map must be legible and submitted on a sheet or sheets no larger than 11 inches by 17 inches for all phases or sections of the project site.
  - d.—An existing project site layout that must include the following information:
    - i.—A topographic map of the land to be developed and such adjoining land whose topography may—affect—the—layout—or—drainage—of—the development. The contour intervals shall be one foot intervals. All elevations shall be given in either National Geodetic Vertical Datum of 1929 (NGVD) or North American Vertical Datum of 1988 (NAVD). The horizontal datum of the topographic map shall be based on Indiana State Plane Coordinates, NAD83. The map will contain a notation indicating these datum information.
      - a.—If the project site is less than or equal to two acres in total land area, the topographic map shall include all topography of land surrounding the site to a distance of at least 100 feet.

- b.—If the project site is greater than two acres in total land area, the topographic map shall include all topography of land surrounding the site to a distance of at least 200 feet.
- ii. Location, name, and normal water level of all wetlands, lakes, ponds, and water courses on or adjacent to the project site.
- iii. Location of all existing structures on the project site.
- iv. One hundred year <u>floodplains</u>, <u>floodway fringes</u>, <u>floodways</u>, and date reference information used to establish such (please note if none exists).
- v.—Identification and delineation of vegetative cover such as grass, <u>weeds</u>, brush, and trees on the project site.
- vi. Location of storm, sanitary, combined sewer, and septic tank systems and outfalls.
- vii.—Apparent land use of all adjacent properties.
- viii. Identification and delineation of sensitive areas.
- ix.— The location of regulated drains, <u>farm</u> drains, <u>inlets</u> and outfalls, if any of record, along with recordation number, etc.
- x. Location of all existing cornerstones within the proposed development and a plan to protect and preserve them.
- xi.—Date topographic survey (field work) was performed.
- xii. A grading and drainage plan, including the following information:
  - a. Location of all proposed site improvements, including roads, utilities, lot delineation and identification, proposed structures, and common areas, along with finished floor elevations of all living areas;
  - b.—One hundred year floodplains, floodway fringes, floodways, and date reference information used to establish such (please note if none exists);
  - c. Delineation of all proposed <u>land disturbing activities</u>, including off-site activities that will provide services to the project site;
  - d. Information regarding any off-site borrow, stockpile, or disposal areas that are associated with a project site, and under the control of the project site owner;
  - e. Existing and proposed topographic information at a contour interval appropriate to indicate drainage patterns;
  - f.—Location, size, and dimensions of all existing streams to be maintained and new drainage systems such as culverts, bridges, storm sewers, conveyance channels, and 100-year overflow paths/ponding areas shown as hatched areas, along with all associated easements;
  - g: Location, size, and dimensions of features such as permanent retention or detention facilities, including natural or constructed wetlands, used for the purpose of stormwater management (include existing retention or detention facilities that will be maintained, enlarged, or otherwise altered and new ponds or basins to be built); and
  - h. One or more typical cross-sections of all existing and proposed channels or other open drainage facilities

(including existing retention or detention facilities) carried to a point above the 100-year high water and showing the elevation of the existing land and the proposed changes, together with the high water elevations expected from the 100-year storm under the controlled conditions called for by this Ordinance, and the relationship of structures, streets, and other facilities.

- xiii. Utility plan sheet(s) showing the location of all proposed utility lines for the project.
- xiv. Storm sewer plan/profile sheet(s) showing the elevation, size, length, location of all proposed storm sewers. Existing and proposed ground grades, storm sewer structures elevations, and utility crossings also must be included.
- xv. A 24-inch by 36-inch plat (both in hard copy and digital format acceptable to the City Engineer), including the following information:
  - a.—Legal description;
  - b. Cross reference to Rule 12; and
  - c.—Regulated drain statement and table.
- xvi. Any other information required by the Plan Commission and/or City Engineer in order to thoroughly evaluate the submitted material.
- 5. Stormwater Drainage Technical Report. A written stormwater drainage technical report must contain a discussion of the steps taken in the design of the stormwater drainage system. Note that in order to gain an understanding of and to evaluate the relationship between the proposed improvements for a specific project section/phase and the proposed improvements for an overall multi-section (phased) project, the detailed information requested for the first section/phase being permitted must be accompanied by an overall project plan that includes the location, dimensions, and supporting analysis of all detention/retention facilities, primary conveyance facilities, and outlet conditions. The technical report needs to include the following detailed items:
  - a.—A summary report, including the following information:
    - i. Description of the nature and purpose of the project.
    - ii.—The significant drainage problems associated with the project.
    - iii.— The analysis procedure used to evaluate these problems and to propose solutions.
    - iv.—Any assumptions or special conditions associated with the use of these procedures, especially the hydrologic or hydraulic methods.
    - v.—The proposed design of the drainage control system.
    - vi. The results of the analysis of the proposed drainage control system showing that it does solve the project's drainage problems. Any hydrologic or hydraulic calculations or modeling results must be adequately cited and described in the summary description. If hydrologic or hydraulic models are used, the input and output files for all necessary runs must be included in the appendices. A map showing any drainage area subdivisions used in the analysis must accompany the report.
    - vii. Soil properties, characteristics, limitations, and hazards associated with the project site and the measures that will be integrated into the project to overcome or minimize adverse soil conditions.

- viii. Identification of any other State or Federal <u>water quality</u> permits that are required for construction activities associated with the owner's project site.
- b. A hydrologic/hydraulic analysis, consistent with the methodologies and calculation included in the City's Stormwater Technical Standards Manual, and including the following information:
  - i. A hydraulic report detailing existing and proposed drainage patterns on the subject site. The report shall include a description of present land use and proposed land use. Any off-site drainage entering the site or any downstream restrictions shall be addressed as well. This report should be comprehensive and detail all of the steps the engineer took during the design process.
  - ii.—All hydrologic and hydraulic computations shall be included in the submittal. These calculations should include, but are not limited to the following: <a href="mailto:runoff">runoff</a> coefficients, runoff calculations, stage discharge relationships, times of concentration and storage volumes.
  - iii. Copies of all computer runs. These computer runs shall include both the input and the outputs. Electronic copies of the computer runs with input files must also be included.
  - iv.—A set of exhibits shall be included showing the drainage sub-areas and a schematic detailing of how the computer models were set up.
  - v.— A conclusion which summarizes the hydraulic design and details how this design satisfies this UDO.
  - vi.—Signed and certified (stamped) by a Professional Engineer registered in the State of Indiana.
- 6.—Stormwater Pollution Prevention Plan (SWPPP) for Construction Sites. A stormwater pollution prevention plan (SWPPP) associated with construction activities must be designed to, at least, meet the requirements of this UDO and must include the following:
  - a.—Location, dimensions, detailed specifications, and construction details of all temporary and permanent stormwater quality measures.
  - b. Soil map of the predominant soil types, as determined by the United States Department of Agriculture (USDA), Natural Resources Conservation Service (NRCS) Soil Survey, or as determined by a soil scientist. Hydrologic classification for soils shall be shown when hydrologic methods requiring soils information are used. A soil legend must be included with the soil map.
  - c.—14-Digit Watershed Hydrologic Unit Code.
  - d.—An estimate of the peak discharge, based on the 10-year storm 24-hour event, of the project site for post-construction conditions.
  - e. Locations where stormwater may be directly discharged into groundwater, such as abandoned wells or sinkholes (please note if none exists).
  - f.—Locations of specific points where stormwater discharge will leave the project site.
  - g. Name of all receiving waters. If the discharge is to a separate municipal storm sewer, identify the name of the municipal operator and the ultimate receiving water.
  - h.—Temporary stabilization plans and sequence of implementation.
  - i. Permanent stabilization plans and sequence of implementation.
  - j.—Temporary and permanent stabilization plans shall include the following:

- Specifications and application rates for soil amendments and seed mixtures.
- ii.—The type and application rate for anchored mulch.
- k. General construction sequence of how the project site will be built, including phases of construction and the associated time of year they are expected to be done.
- l.—Construction sequence describing the relationship between implementation of stormwater quality measures and stages of construction activities.
- m. Location of all soil stockpiles and borrow areas.
- n.—A typical erosion and sediment control plan for individual lot development.
- o. Self-monitoring program including plan and procedures.
- p.—A description of potential pollutant sources associated with the construction activities, which may reasonably be expected to add a significant amount of pollutants to stormwater discharges.
- q.—Material handling and storage associated with construction activity shall meet the spill prevention and spill response requirements in 327 IAC 2-6.1.
- r.—Name, address, telephone number, and list of qualifications of the trained individual in charge of the mandatory stormwater pollution prevention self-monitoring program for the project site.
- 7. Post-Construction Stormwater Pollution Prevention Plan (SWPPP). The post-construction stormwater pollution prevention plan must include the following information:
  - a.—A description of potential pollutant sources from the proposed land use, which may reasonably be expected to add a significant amount of pollutants to stormwater discharges.
  - b.—Location, dimensions, detailed specifications, and construction details of all postconstruction stormwater quality measures.
  - c:—A description of measures that will be installed to control pollutants in stormwater discharges that will occur after construction activities have been completed. Such practices—include infiltration of runoff, flow reduction by use of open vegetated swales and natural depressions, buffer strip—and riparian zone preservation, filter strip creation, minimization of land disturbance and surface—imperviousness, maximization—of open—space, and stormwater retention and detention ponds.
  - d.—A sequence describing when each post-construction stormwater quality measure will be installed.
  - e.—Stormwater quality measures that will remove or minimize pollutants from stormwater run-off.
  - f.—Stormwater quality measures that will be implemented to prevent or minimize adverse impacts to stream and riparian habitat.
  - g.—An operation and maintenance manual for all post-construction stormwater quality measures to facilitate their proper long term function. This operation and maintenance manual shall be made available to future parties who will assume responsibility for the operation and maintenance of the post-construction stormwater quality measures. The manual shall include the following:
    - i. Contact information for the <u>Best Management Practice</u> (BMP) owner (i.e. name, address, business phone number, cell phone number, pager number, e-mail address, etc.).
    - ii. A statement that the BMP owner is responsible for all costs associated with maintaining the BMP.

- iii.— A right-of-entry statement allowing City personnel to inspect and maintain the BMP.
- iv. Specific actions to be taken regarding routine maintenance, remedial maintenance of structural components, and sediment removal. Sediment removal procedures shall be explained in both narrative and graphical forms. A tabular schedule should be provided listing all maintenance activities and dates for performing these required maintenance activities.
- v. Site drawings showing the location of the BMP and access easement, cross sections of BMP features (i.e. pond, forebay(s), structural components, etc.), and the point of discharge for stormwater treated by the BMP. Additionally, the drawings shall provide dimensional information and indicate where applicable warning signs will be placed around a stormwater quality pond. These drawings need to be submitted both in hard copy and in digital format acceptable to the City Engineer.
- D. Review of Individual Lots. For individual lots, or projects disturbing land between 3,000 square feet and one acre, without regard to the minimum lot size of the applicable zoning district, and/or land disturbing activities less than 3,000 square feet but with sites immediately adjacent to a storm sewer inlet, ditch, stream, wetland or other water courses, and any sites which are located on ground with a slope of six percent or greater, a formal review of individual lot/project plan and issuance of a site permit to the lot/project is required. The following information must be submitted to the City Engineer for review and acceptance, by the individual lot operator, whether owning the property or acting as the agent of the property owner, as part of a request for review and issuance of a site permit. In addition, for individual lots that are developed within a larger permitted project, all stormwater management measures necessary to comply with this UDO must be implemented in accordance with permitted plan for the larger project.
  - 1. Lot Plan. A lot plan sealed/signed by an Indiana Registered land Surveyor with following requirements:
    - a.—Drainage patterns and swales;
    - b.—Flood zone designation;
    - c.—Proposed or existing structures tied to lot lines to nearest tenth of a foot.
    - d.—Bearings and distances of lots including: set-back lines, square footage, easements, streets, <u>alleys</u>, <u>sidewalks</u>, <u>building</u> set-back lines, width of lots at building set-back line and lot grades.
    - e.—Proposed elevations required to nearest tenth [must be in accordance with approved subdivision plan (including Benchmark)] for the following:
      - i.—Entry way;
      - ii. Main floor;
      - iii. Top of foundation;
      - iv. Ground grade at each corner of building;
      - v. Ground grade at lot corners;
      - vi. Grade at side yard;
      - vii. Slope of driveway expressed as a percentage; and
      - viii. Elevations of adjacent properties including top finished floor, lot and building corners.
  - 2. Erosion and Sediment Control Plan. At a minimum, the plan must include the following measures:

- a.—Installation and maintenance of a stable construction site access.
- b.—Installation and maintenance of appropriate perimeter erosion and sediment control measures prior to land disturbance.
- c. Minimization of sediment discharge and tracking from the lot.
- d.—Clean-up of sediment that is either tracked or washed onto roads. Bulk clearing of sediment shall not include flushing the area with water. Cleared sediment must be redistributed or disposed of in a manner that is in compliance with all applicable statutes and rules.
- e.—Adjacent lots disturbed by an individual lot operator must be repaired and stabilized with temporary or permanent surface stabilization.
- f.—Self-monitoring program including plan and procedures.
- 3.—Responsibility of Lot Operator. The individual lot operator is responsible for installation and maintenance of all erosion and sediment control measures until the site is stabilized.
- E. Changes to Plans. Any changes or deviations in the detailed plans and specifications after approval of the applicable site permit shall be filed with, and accepted by, the City Engineer prior to land development involving the change. Copies of the changes, if accepted, shall be attached to the original plans and specifications.
- F.—Certification of As-Built Plans. After completion of construction of the project, a professionally prepared and certified 'as-built' set of plans by a Professional Engineer or licensed Land Surveyor registered in the State of Indiana shall be submitted to the City Engineer for review. Additionally, a digital copy of the 'as-built' plans is required in a format accepted by the City Engineer.
  - 1. As-Built Plans. These plans shall include all pertinent data relevant to the completed storm drainage system and stormwater management facilities, and shall include:
    - a.—Pipe size and pipe material;
    - b.—Invert elevations:
    - c. Top rim elevations;
    - d.—Pipe structure lengths;
    - e. BMP types, dimensions, and boundaries/easements;
    - f.—"As-planted" plans for BMPs, as applicable;
    - g.—Data and calculations showing detention basin storage volume; and
    - h.—Data and calculations showing BMP treatment capacity.
  - 2. Visual Recordings. To verify that all enclosed drains are functioning properly, visual recordings (via closed circuit television) of such tile drains shall be required, once following the completion of installation (including the installation of all utility mains). These visual recordings will be scheduled by the City Engineer, and paid for by the developer. Notices shall be provided to the City Engineer within 72 hours following the completion of installation.

Effective on: 6/22/2015



# DIVISION 18.300 FLOODPLAIN AND STORMWATER MANAGEMENT DEFINITIONS

For purposes of the floodplain and stormwater management provisions of this Unified Development Ordinance, the following <u>abbreviations and</u> definitions shall apply unless the context clearly indicates or requires a different meaning.

## Sec. 18.301 Abbreviations

<b>BMP</b>	Best Management Practice
<b>USACE</b>	United States Army Corps of Engineers
CWA	Clean Water Act
<b>EPA</b>	Environmental Protection Agency
GIS	Geographical Information System
IDEM	Indiana Department of Environmental Management
MS4	Municipal Separate Storm Sewer System
NRCS	USDA-Natural Resources Conservation Service
<b>NPDES</b>	National Pollutant Discharge Elimination System
POTW	Publicly Owned Treatment Works
<b>SWCD</b>	Soil and Water Conservation District
<b>SWPPP</b>	Stormwater Pollution Prevention Plan
USDA	United States Department of Agriculture
<u>USFWS</u>	United States Fish and Wildlife Service

## Sec. 18.302 Definitions

#### A - D

**A Zone.** Portions of the SFHA in which the principal source of flooding is runoff from rainfall, snowmelt, or a combination of both. In A ZONES, floodwaters may move slowly or rapidly, but waves are usually not a significant threat to buildings. These areas are labeled as Zone A, Zone AE, Zones A1-A30, Zone AO, Zone AH, Zone AR and Zone A99 on a FIRM.

**Zone A.** Areas subject to inundation by the 1% annual chance flood event. Because detailed hydraulic analyses have not been performed, no base flood elevation or depths are shown.

**Zone AE** and **A1-A30**. Areas subject to inundation by the 1% annual chance flood event determined by detailed methods. Base flood elevations are shown within these zones. (Zone AE is on new and revised maps in place of Zones A1-A30.)

**Zone AO.** Areas subject to inundation by 1% annual chance shallow flooding (usually sheet flow on sloping terrain) where average depths are between one and three feet. Average flood depths derived from detailed hydraulic analyses are shown within this zone.

**Zone AH.** Areas subject to inundation by 1% annual chance shallow flooding (usually areas of ponding) where average depths are one to three feet. Average flood depths derived from detailed hydraulic analyses are shown within this zone.

**Zone AR.** Areas that result from the decertification of a previously accredited flood protection system that is determined to be in the process of being restored to provide base flood protection.

**Zone A99.** Areas subject to inundation by the 1% annual chance flood event, but which will ultimately be protected upon completion of an under-construction Federal flood protection system. These are areas of special flood hazard where enough progress has been made on the construction of a protection system, such as dikes, dams, and levees, to consider it complete for insurance rating purposes. Zone A99 may only be used when the flood protection system has reached specified statutory progress toward completion. No base flood elevations or depths are shown.

**Accessory Structure.** (appurtenant structure). A structure with a floor area 400 square feet or less that is located on the same parcel of property as the principal structure and the use of which is incidental to the use of the principal structure. Accessory structures should constitute a minimal initial investment, may not be used for human habitation, and be designed to have minimal flood damage potential. Examples of accessory structures are detached garages, carports, storage sheds, pole barns, and hay sheds.

**Addition (to an existing structure).** Any walled and roofed expansion to the perimeter of a structure in which the addition is connected by a common load-bearing wall other than a firewall. Any walled and roofed addition, which is connected by a firewall or is separated by independent perimeter load-bearing walls, is new construction.

**Agricultural land disturbing activity**. Tillage, planting, cultivation, or harvesting operations for the production of agricultural or nursery vegetative crops. The term also includes pasture renovation and establishment, the construction of agricultural conservation practices, and the installation and maintenance of agricultural drainage tile. For purposes of this rule, the term does not include land disturbing activities for the construction of agricultural related facilities, such as barns, buildings to house livestock, roads associated with infrastructure, agricultural waste lagoons and facilities, lakes and ponds, wetlands; and other infrastructure.

**Appeal.** A request for a review of the Floodplain Administrator's interpretation of any provision of this section.

**Area of Shallow Flooding.** A designated AO or AH Zone on the community's Flood Insurance Rate Map (FIRM) with base flood depths from one to three feet where a clearly defined channel does not exist, where the path of flooding is unpredictable and indeterminate, and where velocity flow may be evident. Such flooding is characterized by ponding or sheet flow.

**Base Flood.** The flood having a 1% chance of being equaled or exceeded in any given year.

**Base Flood Elevation (BFE).** The elevation of the 1% annual chance flood.

**Base Flow.** Stream discharge derived from groundwater sources as differentiated from surface runoff. Sometimes considered to include flows from regulated lakes or reservoirs.

**Basement.** The portion of a structure having its floor sub-grade (below ground level) on all sides.

**Best Management Practices**. Design, construction, and maintenance practices and criteria for stormwater facilities that minimize the impact of stormwater runoff rates and volumes, prevent erosion, and capture pollutants.

**Buffer Strip.** An existing, variable width strip of vegetated land intended to protect water quality and habitat.

**Building.** See Structure.

<u>Capacity</u> (of a Storm Drainage Facility). The maximum flow that can be conveyed or stored by a storm drainage facility without causing damage to public or private property.

<u>Catch Basin.</u> A chamber usually built at the curb line of a street for the admission of surface water to a storm drain or subdrain, having at its base a sediment sump designed to retain grit and detritus below the point of overflow.

**Channel.** A portion of a natural or artificial watercourse which periodically or continuously contains moving water, or which forms a connecting link between two bodies of water. It has a defined bed and banks which serve to confine the water.

**Community.** A political entity that has the authority to adopt and enforce floodplain provisions for the area under its jurisdiction.

**Community Rating System (CRS).** A program developed by the Federal Insurance Administration to provide incentives for those communities in the Regular Program that have gone beyond the minimum floodplain management requirements to develop extra measures to provide protection from flooding.

**Compliance.** The act of correcting a violation or violations within the time frame specified by this ordinance.

<u>Comprehensive Stormwater Management.</u> A comprehensive stormwater program for effective management of stormwater quantity and quality throughout the community.

**Constructed Wetland.** A manmade shallow pool that creates growing conditions suitable for wetland vegetation and is designed to maximize pollutant removal.

**Construction Activity**. Land disturbing activities, and land disturbing activities associated with the construction of infrastructure and structures. This term does not include routine ditch or road maintenance or minor landscaping projects.

**Construction Plan**. A representation of a project site and all activities associated with the project. The plan includes the location of the project site, buildings and other infrastructure, grading activities, schedules for implementation and other pertinent information related to the project site. A stormwater pollution prevention plan is a part of the construction plan.

<u>Construction Site Access.</u> A stabilized stone surface at all points of ingress or egress to a project site, for the purpose of capturing and detaining sediment carried by tires of vehicles or other equipment entering or exiting the project site.

<u>Construction Support Activities.</u> Include but are not limited to the following: concrete or asphalt batch plants, equipment staging yards, material storage areas, excavated material disposal areas, borrow areas. Such activities must not support multiple, unrelated projects, be a commercial/industrial operation, or continue to operate beyond the completion of the construction activity for the project it supports.

**Contiguous.** Adjoining or in actual contact with.

**Contour.** An imaginary line on the surface of the earth connecting points of the same elevation.

**Contour Line.** Line on a map which represents a contour or points of equal elevation.

<u>Contractor or subcontractor.</u> An individual or company hired by the project site or individual lot owner, their agent, or the individual lot operator to perform services on the project site.

**Conveyance.** Any structural method for transferring stormwater between at least two points. The term includes piping, ditches, swales, curbs, gutters, catch basins, channels, storm drains, and roadways.

**Critical Facility.** A facility for which even a slight chance of flooding might be too great. Critical Facilities include, but are not limited to, schools, nursing homes, hospitals, police, fire, emergency response installations, installations which produce, use or store hazardous materials or hazardous waste.

**Cross Section.** A graph or plot of ground elevation across a stream valley or a portion of it, usually along a line perpendicular to the stream or direction of flow.

**Culvert**. A closed conduit used for the conveyance of surface drainage water under a roadway, railroad, canal or other impediment.

**D Zone.** The unstudied areas where flood hazards are undetermined, but flooding is possible. Flood insurance is available in participating communities but is not required by regulation in this zone.

<u>Dechlorinated swimming pool discharge</u>. Chlorinated water that has either sat idle for seven (7) days following chlorination prior to discharge to the MS4 conveyance, or, by analysis, does not contain detectable concentrations (less than five-hundredths (0.05) milligram per liter) of chlorinated residual.

**Depressional Storage Areas**. Non-riverine depressions in the earth where stormwater collects. The volumes are often referred to in units of acre-feet.

**Design Storm.** A selected storm event, described in terms of the probability of occurring once within a given number of years, for which drainage of flood control improvements are designed and built.

**Detention.** Managing stormwater runoff by temporary holding and controlled release.

**Detention Basin**. A facility constructed or modified to restrict the flow of stormwater to a prescribed maximum rate, and to detain concurrently the excess waters that accumulate behind the outlet.

**Detention Facility**. A facility designed to detain a specified amount of stormwater runoff assuming a specified release rate. The volumes are often referred to in units of acre-feet.

**Detention Storage**. The temporary detaining of storage of stormwater in storage facilities, on rooftops, in streets, parking lots, school yards, parks, open spaces or other areas under predetermined and controlled conditions, with the rate of release regulated by appropriately installed devices.

**Detention Time.** The theoretical time required to displace the contents of a tank or unit at a given rate of discharge (volume divided by rate of discharge).

**D Zone.** The unstudied areas where flood hazards are undetermined, but flooding is possible. Flood insurance is available in participating communities but is not required by regulation in this zone.

<u>**Detritus.**</u> Dead or decaying organic matter; generally contributed to stormwater as fallen leaves and sticks or as dead aquatic organisms.

**Developer.** Any person financially responsible for construction activity, or an owner of property who sells or leases, or offers for sale or lease, any lots in a subdivision.

## **Development.**

- A. Any man-made change to improved or unimproved real estate including but not limited to:
  - 1. Construction, reconstruction, or placement of a structure or any addition to a structure:
  - 2. Installing a manufactured home on a site, preparing a site for a manufactured home or installing recreational vehicle on a site for more than 180 days;
  - 3. Installing utilities, erection of walls and fences, construction of roads, or similar projects;
  - 4. Construction of flood control structures such as levees, dikes, dams, channel improvements, etc.;
  - 5. Mining, dredging, filling, grading, excavation, or drilling operations;
  - 6. Construction and/or reconstruction of bridges or culverts;
  - 7. Storage of materials; or
  - 8. Any other activity that might change the direction, height, or velocity of flood or surface waters.
- B. Development does not include activities such as the maintenance of existing structures and facilities such as painting, re-roofing, resurfacing roads, gardening, plowing, and similar agricultural practices that do not involve filling, grading, excavation, or the construction of permanent structures.

**Discharge**. In the context of water quantity provisions, Uusually the rate of water flow. A volume of fluid passing a point per unit time commonly expressed as cubic feet per second, cubic meters per second, gallons per minute, or millions of gallons per day. In the context of water quality provisions, the discharge means any addition of liquids or solids to a water body or a flow conveyance facility.

**Disposal.** The discharge, deposit, injection, spilling, leaking, or placing of any solid waste or hazardous waste into or on any land or water so that the solid waste or hazardous waste, or any constituent of the waste, may enter the environment, be emitted into the air, or be discharged into any waters, including ground waters.

**Ditch**. A man-made, open watercourse in or into which excess surface water or groundwater drained from land, stormwater runoff, or floodwaters flow either continuously or intermittently.

**Drain**. A buried slotted or perforated pipe or other conduit (subsurface drain) or a ditch (open drain) for carrying off surplus groundwater or surface water.

**Drainage**. The removal of excess surface water or groundwater from land by means of ditches or subsurface drains. Also see Natural drainage.

**Drainage Area**. The area draining into a stream at a given point. It may be of different sizes for surface runoff, subsurface flow and base flow, but generally the surface runoff area is considered as the drainage area.

**Dry Well**. A type of infiltration practice that allows stormwater runoff to flow directly into the ground via a bored or otherwise excavated opening in the ground surface.

**Duration.** The time period of a rainfall event.

#### **E** - **G**

**Elevated Structure.** A non-basement structure built to have the lowest floor elevated above the ground level by means of fill, solid foundation perimeter walls, filled stem wall foundations, pilings, or columns (posts and piers).

**Elevation Certificate.** A certified statement that verifies a structure's elevation information.

**Emergency Program.** The first phase under which a community participates in the NFIP. It is intended to provide a first layer amount of insurance at subsidized rates on all insurable structures in that community before the effective date of the initial FIRM.

**Encroachment.** The advance or infringement of uses, fill, excavation, buildings, permanent structures or development into a floodplain, which may impede or alter the flow capacity of a floodplain.

**Environment**. The sum total of all the external conditions that may act upon a living organism or community to influence its development or existence.

**Erodibility Index (EI).** The soil erodibility index (EI) provides a numerical expression of the potential for a soil to erode considering the physical and chemical properties of the soil and the climatic conditions where it is located. The higher the index, the greater the investment needed to maintain the sustainability of the soil resource base if intensively cropped. It is defined to be the maximum of (RxKxLS)/T (from the universal Soil Loss Equation) and (Cxl)/T (from the Wind Erosion Equation), where R is a measure of rainfall and runoff, K is a factor of the susceptibility of the soil to water erosion, LS is a measure of the combined effects of slope length and steepness, C is a climatic characterization of windspeed and surface soil moisture and I is a measure of the susceptibility of the soil to wind erosion. Erodibility Index scores equal to or greater than 8 are considered highly erodible land.

**Erosion.** The wearing away of the land surface by water, wind, ice, gravity, or other geological agents. The following terms are used to describe different types of water erosion:

- A. Accelerated Erosion. Erosion much more rapid than normal or geologic erosion, primarily as a result of the activities of man.
- B. Channel Erosion. An erosion process whereby the volume and velocity of flow wears away the bed and/or banks of a well-defined channel.
- C. Gully Erosion. An erosion process whereby runoff water accumulates in narrow channels and, over relatively short periods, removes the soil to considerable depths, ranging from 1-2 ft. to as much as 75-100 ft.
- D. Rill Erosion. An erosion process in which numerous small channels only several inches deep are formed; occurs mainly on recently disturbed and exposed soils (see Rill).
- E. Splash Erosion. The spattering of small soil particles caused by the impact of raindrops on wet soils; the loosened and spattered particles may or may not be subsequently removed by surface runoff.
- A.F.Sheet Erosion. The gradual removal of a fairly uniform layer of soil from the land surface by runoff water.

**Erosion and Sediment Control Measure**. A practice, or a combination of practices, to control erosion and resulting sedimentation, and/or off-site damages minimize sedimentation by first reducing or eliminating erosion at the source and then as necessary, trapping sediment to prevent it from being discharged from or within a project site.

**Erosion and Sediment Control System**. The use of appropriate erosion and sediment control measures to minimize sedimentation by first reducing or eliminating erosion at the source and then as necessary, trapping sediment to prevent it from being discharged from or within a project site.

**Existing Construction.** Any structure for which the start of construction commenced before the effective date of the community's first floodplain provision.

**Existing Manufactured Home Park or Subdivision.** A manufactured home park or subdivision for which the construction of facilities for servicing the lots on which the manufactured homes are to be affixed (including, at a minimum, the installation of utilities, the construction of streets, and either final site grading or the pouring of concrete pads) is completed before the effective date of the community's first floodplain provision.

**Expansion to an Existing Manufactured Home Park or Subdivision.** The preparation of additional sites by the construction of facilities for servicing the lots on which the manufactured homes are to be affixed (including the installation of utilities, the construction of streets, and either final site grading or the pouring of concrete pads).

**FEMA.** The Federal Emergency Management Agency.

**Filter Strip**. A long, relatively narrow area (usually, 20-75 feet wide) of undisturbed or planted vegetation used near disturbed or impervious surfaces to filter stormwater pollutants for the protection of watercourses, reservoirs, or adjacent properties.

**Five-Hundred Year Flood (500-Year Flood).** The flood that has a 0.2% chance of being equaled or exceeded in any year.

**Floatable.** Any solid waste that will float on the surface of the water.

**Flood.** A general and temporary condition of partial or complete inundation of normally dry land areas from the overflow, the unusual and rapid accumulation, or the runoff of surface waters from any source.

**Flood Boundary and Floodway Map (FBFM).** An official map on which the Federal Emergency Management Agency (FEMA) or Federal Insurance Administration (FIA) has delineated the areas of flood hazards and regulatory floodway.

**Flood Insurance Rate Map (FIRM).** An official map of a community, on which FEMA has delineated both the areas of special flood hazard and the risk premium zones applicable to the community.

**Flood Insurance Study (FIS).** The official hydraulic and hydrologic report provided by FEMA. The report contains flood profiles, as well as the FIRM, FBFM (where applicable), and the water surface elevation of the base flood.

**Flood Prone Area.** Any land area acknowledged by a community as being susceptible to inundation by water from any source. (See "Flood")

**Flood Protection Grade (FPG).** The elevation of the regulatory flood plus two feet at any given location in the SFHA (See "Freeboard")

**Floodplain.** The channel proper and the areas adjoining any wetland, lake or watercourse which have been or hereafter may be covered by the regulatory flood. The floodplain includes both the floodway and the fringe districts.

**Floodplain Management.** The operation of an overall program of corrective and preventive measures for reducing flood damage and preserving and enhancing, where possible, natural resources in the floodplain, including but not limited to emergency preparedness plans, flood control works, floodplain management regulations, and open space plans.

**Floodplain Management Regulations.** This section and other provisions of this Unified Development Ordinance, building codes, health regulations, special purpose ordinances, and other applications of police power which control development in flood-prone areas. This term describes federal, state, or local regulations in any combination thereof, which provide standards for preventing and reducing flood loss and damage. Floodplain Management Regulations are also referred to as floodplain regulations, floodplain ordinance, flood damage prevention ordinance, and floodplain management requirements.

**Floodproofing (Dry Floodproofing).** A method of protecting a structure that ensures that the structure, together with attendant utilities and sanitary facilities, is watertight to the floodproofed design elevation with walls that are substantially impermeable to the passage of water. All structural components of these walls are capable of resisting hydrostatic and hydrodynamic flood forces, including the effects of buoyancy, and anticipated debris impact forces.

**Floodproofing Certificate.** A form used to certify compliance for non-residential structures as an alternative to elevating structures to or above the FPG. This certification must be by a Registered Professional Engineer or Architect.

**Floodway.** The channel of a river or stream and those portions of the floodplains adjoining the channel which are reasonably required to efficiently carry and discharge the peak flood flow of the regulatory flood of any river or stream.

**Fluvial Erosion Hazard (FEH) Corridor.** Fluvial Erosion Hazard corridors represent the areas along the streams (including the channel and immediate overbanks areas) that are believed to be subject to stream movement or streambank erosion. These corridors have been delineated for most actively migrating and relatively stationary streams in Indiana through an Indiana Silver Jackets initiative.

**Footing Drain**. A drainpipe installed around the exterior of a basement wall foundation to relieve water pressure caused by high groundwater elevation.

**Freeboard.** A factor of safety, usually expressed in feet above the BFE, which is applied for the purposes of floodplain management. It is used to compensate for the many unknown factors that could contribute to flood heights greater than those calculated for the base flood.

**Fringe.** Those portions of the floodplain lying outside the floodway.

**Garbage**. All putrescible animal solid, vegetable solid, and semisolid wastes resulting from the processing, handling, preparation, cooking, serving, or consumption of food or food materials.

**Gasoline Outlet**. An operating gasoline or diesel fueling facility whose primary function is the resale of fuels. The term applies to facilities that create five thousand (5,000) or more square feet of impervious surface, or generate an average daily traffic count of one hundred (100) vehicles per one thousand (1,000) square feet of land area.

**Geographical Information System (GIS)**. A computer system capable of assembling, storing, manipulation, and displaying geographically referenced information. This technology can be used for resource management and development planning.

**Grade**. (1) The inclination or slope of a channel, canal, conduit, etc., or natural ground surface usually expressed in terms of the percentage the vertical rise (or fall) bears to the corresponding horizontal distance. (2) The finished surface of a canal bed, roadbed, top of embankment, or bottom of excavation; any surface prepared to a design elevation for the support of construction, such as paving or the laying of a conduit. (3) To finish the surface of a canal bed, roadbed, top of embankment, or bottom of excavation, or other land area to a smooth, even condition.

**Grading**. The cutting and filling of the land surface to a desired slope or elevation.

**Groundwater**. Accumulation of underground water, natural or artificial. The term does not include manmade underground storage or conveyance structures.

### H - P

Habitat. The environment in which the life needs of a plant or animal are supplied.

**Hardship.** (As related to variances of this chapter) The exceptional hardship that would result from a failure to grant the requested variance. The Common Council requires that the variance is exceptional, unusual, and peculiar to the property involved. Mere economic or financial hardship alone is not exceptional. Inconvenience, aesthetic considerations, physical handicaps, personal preferences, or the disapproval of one's neighbors likewise cannot, as a rule, qualify as an exceptional hardship. All of these problems can be resolved through other means without granting a variance, even if the alternative is more expensive, or requires the property owner to build elsewhere or put the parcel to a different use than originally intended.

**Highest Adjacent Grade.** The highest natural elevation of the ground surface, prior to the start of construction, next to the proposed walls of a structure.

Highly Erodible Land (HEL). Land that has an erodibility index of eight or more.

**Historic Structure.** Any structure individually listed on the National Register of Historic Places or the Indiana State Register of Historic Sites and Structures.

Hot Spot Development. Projects involving land uses considered to be high pollutant producers such as vehicle service and maintenance facilities, vehicle salvage yards and recycling facilities, vehicle and equipment cleaning facilities, fleet storage areas for buses, trucks, etc., industrial/commercial or any hazardous wase storage areas or areas that generate such wasters, industrial sites, restaurants and convenience stores, any activity involving chemical missing or loading/unloading, outdoor liquid container storage, public works storage areas, commercial container nurseries, and some high traffic retail uses characterized by frequent vehicle turnover.

**Hydrologic Unit Code.** A numeric United States Geologic Survey code that corresponds to a watershed area. Each area also has a text description associated with the numeric code.

**Hydrology.** The science of the behavior of water in the atmosphere, on the surface of the earth, and underground. A typical hydrologic study is undertaken to compute flow rates associated with specified flood events.

**Illicit Discharge.** Any discharge to a conveyance that is not composed entirely of stormwater except naturally occurring floatables, such as leaves or tree limbs. Illicit discharges include polluted flows from direct and indirect connections to the MS4 conveyance, illegal dumping, and contaminated runoff.

**Impaired Waters.** Waters that do not or are no expected to meet applicable water quality standards, as included on IDEM's CWA Section 303(d) List of Impaired Waters.

**Impervious Surface.** Surfaces, such as pavement and rooftops, which prevent the infiltration of stormwater into the soil.

**Increased Cost of Compliance (ICC).** The cost to repair a substantially damaged structure that exceeds the minimal repair cost and that is required to bring a substantially damaged structure into compliance with the local flood damage prevention ordinance. Acceptable mitigation measures are elevation, relocation, demolition, or any combination thereof. All renewal and new business flood insurance policies with effective dates on or after June 1, 1997, will include ICC coverage.

**Individual Building Lot.** A single parcel of land within a multi-parcel development.

Individual Lot Operator. A contractor or subcontractor working on an individual lot.

**Individual Lot Owner.** A person who has financial control of construction activities for an individual lot.

**Infiltration**. Passage or movement of water into the soil. <u>Infiltration practices include any structural BMP designed to facilitate the percolation of runoff through the soil to groundwater. Examples include infiltration basins or trenches, dry wells, and porous pavement.</u>

**Inlet**. An opening into a storm drain system for the entrance of surface stormwater runoff, more completely described as a storm drain inlet.

**Land-Disturbing Activity**. Any man-made change of the land surface, including removing vegetative cover that exposes the underlying soil, excavating, filling, transporting and grading.

**Land Surveyor.** A person licensed under the laws of the State of Indiana to practice land surveying.

Larger common plan of development or sale. A plan, undertaken by a single project site owner or a group pf project site owners acting in concert, to offer lots for sale or lease; where such land is contiguous, or is known, designated, purchased or advertised as a common unit or by a common name, such land shall be presumed as being offered for sale or lease as part of a large common plan. The term also includes phased or other construction activity by a single entity for its own use.

**Letter of Final Determination (LFD).** A letter issued by FEMA during the mapping update process which establishes final elevations and provides the new flood map and flood study to the community. The LFD initiates the six-month adoption period. The community must adopt or amend its floodplain management regulations during this six-month period unless the community has previously incorporated an automatic adoption clause.

**Letter of Map Change (LOMC).** A general term used to refer to the several types of revisions and amendments to FEMA maps that can be accomplished by letter. They include Letter of Map Amendment (LOMA), Letter of Map Revision (LOMR), and Letter of Map Revision based on Fill (LOMR-F).

**Letter of Map Amendment (LOMA).** An amendment by letter to the currently effective FEMA map that establishes that a property is not located in a SFHA through the submittal of property specific elevation data. A LOMA is only issued by FEMA.

**Letter of Map Revision (LOMR).** An official revision to the currently effective FEMA map. It is issued by FEMA and changes flood zones, delineations, and elevations.

**Letter of Map Revision Based on Fill (LOMR-F).** An official revision by letter to an effective NFIP map. A LOMR-F provides FEMA's determination concerning whether a structure or parcel has been elevated on fill above the BFE and excluded from the SFHA.

**Lowest Adjacent Grade.** The lowest elevation, after completion of construction, of the ground, sidewalk, patio, deck support, or basement entryway immediately next to the structure.

**Lowest Floor.** The lowest elevation described among the following:

- A. The top of the lowest level of the structure;
- B. The top of the basement floor;
- C. The top of the garage floor, if the garage is the lowest level of the structure;
- D. The top of the first floor of a structure elevated on pilings or pillars;
- E. The top of the floor level of any enclosure, other than a basement, below an elevated structure where the walls of the enclosure provide any resistance to the flow of flood waters unless:
  - 1. The walls are designed to automatically equalize the hydrostatic flood forces on the walls by allowing for the entry and exit of flood waters, by providing a minimum of two openings (in addition to doorways and windows) in a minimum of two exterior walls; if a structure has more than one enclosed area, each shall have openings on exterior walls.
  - 2. The total net area of all openings shall be at least one (1) square inch for every one square foot of enclosed area; the bottom of all such openings shall be no higher than one (1) foot above the exterior grade or the interior walls immediately beneach each opening, whichever is higher.
  - 3. Such enclosed space shall be usable solely for the parking of vehicles and building access.

Manhole. Storm drain structure through which a person may enter to gain access to an underground storm drain or enclosed structure.

**Manufactured Home.** A structure, transportable in one or more sections, which is built on a permanent chassis and is designed for use with or without a permanent foundation when attached to the required utilities. The term Manufactured Home does not include a recreational vehicle.

**Manufactured Home Park or Subdivision.** A parcel (or contiguous parcels) of land divided into two or more manufactured home lots for rent or sale.

**Market Value.** The building value, excluding the land (as agreed to between a willing buyer and seller), as established by what the local real estate market will bear. Market value can be established by independent certified appraisal, replacement cost depreciated by age of building (actual cash value), or adjusted assessed values.

**Measurable Storm Event.** A precipitation event that results in a total measured precipitation accumulation equal to, or greater than, one-half (0.5) inch of rainfall.

**Mitigation.** Sustained actions taken to reduce or eliminate long-term risk to people and property from hazards and their effects. The purpose of mitigation is two-fold: to protect people and structures, and to minimize the cost of disaster response and recovery.

**Municipal Separate Storm Sewer System (MS4)**. An MS4 is a conveyance or system of conveyance that is:

- A. Owned by a state, city, town, village, or other public entity that discharges to waters of the U.S.;
- B. Designed or used to collect or convey stormwater;
- C. Not a combined sewer; and
- D. Not part of a Publicly Owned Treatment Works (POTW).

**National Flood Insurance Program (NFIP).** The federal program that makes flood insurance available to owners of property in participating communities nationwide through the cooperative efforts of the Federal Government and the private insurance industry.

**National Geodetic Vertical Datum of 1929 (NGVD).** As corrected in 1929, is a vertical control used as a reference for establishing varying elevations within the floodplain.

**National Pollution Discharge Elimination System (NPDES)**. A permit developed by the U.S. EPA through the Clean Water Act. NPDES permit program controls water pollution by regulating point sources that discharge pollutants into waters of the United States. In Indiana, the permitting process has been delegated to IDEM.

**Natural Drainage.** The flow patterns of stormwater runoff over the land in its pre-development state.

**New Construction.** Any structure for which the start of construction commenced after the effective date of the community's first floodplain provision.

**New Manufactured Home Park or Subdivision.** A manufactured home park or subdivision for which the construction of facilities for servicing the lots on which the manufactured homes are to be affixed (including at a minimum, the installation of utilities, the construction of streets, and either final site grading or the pouring of concrete pads) is completed on or after the effective date of the community's first floodplain provision.

**North American Vertical Datum of 1988 (NAVD 88).** As adopted in 1993, is a vertical control datum used as a reference for establishing varying elevations within the floodplain.

**Nutrient(s).** (1) A substance necessary for the growth and reproduction of organisms. (2) In water, those substances (chiefly nitrates and phosphates) that promote growth of algae and bacteria.

**Obstruction.** Includes, but is not limited to, any dam, wall, wharf, embankment, levee, dike, pile, abutment, protection, excavation, canalization, bridge, conduit, culvert, building, wire, fence, rock,

gravel, refuse, fill, structure, vegetation, or other material in, along, across or projecting into any watercourse which may alter, impede, retard or change the direction and/or velocity of the flow of water; or due to its location, its propensity to snare or collect debris carried by the flow of water, or its likelihood of being carried downstream.

Offense. Both a violation and a failure of compliance on a particular project. If there are multiple violations or multiple failures of compliance on the same project, each shall be considered a separate offense.

**One-Hundred Year Flood (100-Year Flood).** The flood that has a 1% chance of being equaled or exceeded in any given year. Any flood zone that begins with the letter "A" is subject to the 1% annual chance flood. See Regulatory Flood.

**One-Percent Annual Chance Flood**. The flood that has a one percent chance of being equaled or exceeded in any given year. Any flood zone that begins with the letter "A" is subject to the 1% annual chance flood. See Regulatory Flood.

**Open Drain.** A natural watercourse or constructed open channel that conveys drainage water.

**Open Space.** Any land area devoid of any disturbed or impervious surfaces created by industrial, commercial, residential, agricultural, or other manmade activities.

<u>Outfall.</u> The point, location, or structure where a pipe or open drain discharges to a receiving body of water.

**Outlet**. The point of water disposal from a stream, river, lake, tidewater, or artificial drain.

**Participating Community.** Any community that voluntarily elects to participate in the NFIP by adopting and enforcing floodplain management regulations that are consistent with the standards of the NFIP.

<u>Peak Discharge</u> (or Peak Flow). The maximum instantaneous flow from a given storm condition at a specific location.

**Percolation.** The movement of water through soil.

**Permanent stabilization.** The establishment, at a uniform density of seventy percent (70%) across the disturbed area, of vegetative cover or permanent non-erosive material that will ensure the resistance of the soil to erosion, sliding, or other movement.

**Pervious.** Allowing movement of water.

**Physical Map Revision. (PMR).** An official republication of a community's FEMA map to effect changes to base (one percent annual chance) flood elevations, floodplain boundary delineations, regulatory floodways, and planimetric features. These changes typically occur as a result of structural works or improvements, annexations resulting in additional flood hazard areas, or correction to base flood elevations or SFHAs.

**Point Source.** Any discernible, confined, and discrete conveyance including but not limited to any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, or container from which pollutants are or maybe discharged.

**Porous Pavement.** A type of infiltration practice to improve the quality and reduce the quantity of stormwater runoff via the use of manmade, pervious pavement which allows runoff to percolate through the pavement and into underlying soils.

**Professional Engineer.** A person licensed under the laws of the State of Indiana to practice professional engineering.

**Project Site.** The entire area on which construction activity is to be performed.

**Project Site Owner.** The person required to submit a stormwater permit application and required to comply with the terms of this ordinance, including a developer or a person who has financial and operational control of construction activities, and project plans and specifications, including the ability to make modifications to those plans and specifications.

**Public Safety and Nuisance.** Anything which is injurious to the safety or health of an entire community, neighborhood or any considerable number of persons, or unlawfully obstructs the free passage or use, in the customary manner, of any navigable lake, or river, bay, stream, canal, or basin.

## **Q** - **Z**

**Rain Garden.** A vegetative practice used to alter impervious surfaces, such as roofs, into pervious surfaces for absorption and treatment of rainfall.

Receiving Stream, Receiving Channel, or Receiving Water. The body of water into which runoff or effluent is discharged. The term does not include private drains, unnamed conveyances, retention and detention basins, or constructed wetlands used as treatment.

**Recharge.** Replenishment of groundwater reservoirs by infiltration and transmission from the outcrop of an aquifer or from permeable soils.

**Recreational Vehicle.** A vehicle that is the following:

- A. Built on a single chassis;
- B. 400 square feet or less when measured at the largest horizontal projections;
- C. Designed to be self-propelled or permanently towable by a light duty truck; and
- D. Designed primarily not for use as a permanent dwelling, but as quarters for recreational camping, travel, or seasonal use.

**Redevelopment**. Alterations of a property that change a site or building in such a way that there is disturbances of one acre or more of land Development occurring on a previously developed site. The term does not include such activities as exterior remodeling.

**Refueling area.** An operating gasoline or diesel fueling area whose primary function is to provide fuel to equipment of vehicles.

**Regional Pond.** A detention/retention basin sized to detain/retain the runoff from the entire watershed, on-site and off-site, tributary to the pond's outlet.

**Regular Program.** The phase of the community's participation in the NFIP where more comprehensive floodplain management requirements are imposed and higher amounts of insurance are available based upon risk zones and elevations determined in a FIS.

**Regulated Drain**. A drain subject to the provisions of the Indiana Drainage Code, I.C.-36-9-27.

**Regulatory Flood.** The flood having a 1% chance of being equaled or exceeded in any given year, as calculated by a method and procedure that is acceptable to and approved by the Indiana Department of Natural Resources and the Federal Emergency Management Agency. The regulatory

flood elevation at any location is as defined in **Sec.** <u>4.502</u>, **General Provisions**. The Regulatory Flood is also known by the terms: Base Flood, One-Percent Annual Chance Flood and 100-Year Flood.

**Release Rate**. The amount of stormwater release from a stormwater control facility per unit of time.

**Repetitive Loss.** Flood-related damages sustained by a structure on two separate occasions during a 10 year period for which the cost of repairs at the time of each such flood event, on the average, equaled or exceeded 25% of the market value of the structure before the damage occurred.

**Reservoir.** A natural or artificially created pond, lake or other space used for storage, regulation or control of water. May be either permanent or temporary. The term is also used in the hydrologic modeling of storage facilities.

**Retention.** The storage of stormwater to prevent it from leaving the development site. May be temporary or permanent.

**Retention Basin.** A type of storage practice, that has no positive outlet, used to retain stormwater runoff for an indefinite amount of time. Runoff from this type of basin is removed only by infiltration through a porous bottom or by evaporation.

**Retention Facility**. A facility designed to completely retain a specified amount of stormwater runoff without release except by means of evaporation, infiltration or pumping. The volumes are often referred to in units of acre-feet.

**Return Period.** The average interval of time within which a given rainfall event will be equaled or exceeded once. A flood having a return period of 100 years has a one percent probability of being equaled or exceeded in any one year.

**Riparian Zone.** Of, on, or pertaining to the banks of a stream, river, or pond.

**Riparian Habitat.** A land area adjacent to a waterbody that supports animal and plant life associated with that waterbody.

**Runoff**. The portion of precipitation that flows from a drainage area on the land surface, in open channels, or in stormwater conveyance systems.

**Runoff Coefficient**. A decimal fraction relating the amount of rain which appears as runoff and reaches the storm drain system to the total amount of rain falling. A coefficient of 0.5 implies that 50 percent of the rain falling on a given surface appears as stormwater runoff.

**Section 1316.** The section of the National Flood Insurance Act of 1968, as amended, which states that no new flood insurance coverage shall be provided for any property that the Administrator finds has been declared by a duly constituted state or local zoning authority or other authorized public body to be in violation of state or local laws, regulations, or ordinances that intended to discourage or otherwise restrict land development or occupancy in flood-prone areas.

**Sediment**. Solid material (both mineral and organic) that is in suspension, is being transported, or has been moved from its site of origin by air, water, gravity, or ice and has come to rest on the earth's surface.

**Sedimentation**. The process that deposits soils, debris and other unconsolidated materials either on the ground surfaces or in bodies of water or watercourses.

**Sensitive Water.** A waterbody is in need of priority protection or remediation based on its:

- A. Providing habitat for threatened or endangered species,
- B. Usage as a public water supply intake,
- C. Relevant community value,
- D. Usage for full body contact recreation,
- E. exceptional use classification as found in 327 IAC 2-1-11(b),
- A-F. Outstanding state resource water classification as found in 327 IAC 2-1-2(3) and 327 IAC 2-1.5-19(b).

<u>Silvicultural</u>. The practice of controlling the establishment, growth, composition, health, and quality of forests to meet diverse needs and values.

- A. Nonpoint activities include source silvicultural activities such as nursery operations, site preparation, reforestation and subsequent cultural treatment, thinning, prescribed burning, pest and fire control, harvesting operations, surface drainage, or road construction and maintenance from which there is natural runoff. Some of these activities (such as stream crossing for roads) may involve the placement of dredged or fill material which may require a CWA section 404 permit and a 401 Water Quality Certification.
- B. Point source activities include any discernible, confined and discrete conveyance related to rock crushing, gravel washing, log sorting, or log storage facilities which hare operated in connection with silvicultural activities and from which pollutants are discharged into water of the United States or the State.

**Site.** The entire area included in the legal description of the land on which land disturbing activity is to be performed.

Solid Waste. Any garbage, refuse, debris, or other discarded material.

**Special Flood Hazard Area (SFHA).** The lands within the jurisdiction of the City of Valparaiso subject to inundation by the regulatory flood. The SFHAs of the City of Valparaiso are generally identified as such on the Porter County, Indiana and Incorporated Areas Flood Insurance Rate Map dated September 30, 2015 as well as any future updates, amendments, or revisions, prepared by the Federal Emergency Management Agency with the most recent date. (These areas are shown on a FIRM as Zone A, AE, A1- A30, AH, AR, A99, or A0).

**Spill.** The unexpected, unintended, abnormal, or unapproved dumping, leakage, drainage, seepage, discharge, or other loss of petroleum, hazardous substances, extremely hazardous substances, or objectional substances.

**Start of Construction.** Includes substantial improvement, and means the date the building permit was issued, provided the actual start of construction, repair, reconstruction, or improvement was within 180 days of the permit date. The actual start means either the first placement of permanent construction of a structure on a site, such as the pouring of a slab or footings, the installation of piles, the construction of columns, or any work beyond the stage of excavation; or the placement of a manufactured home on a foundation. Permanent installation of streets and/or walkways; nor does it include excavation for a basement, footings, piers, foundations, or the erection of temporary forms; nor does it include the installation on the property of accessory buildings, such as garages or sheds not occupied as dwelling units or not part of the main structure. For a substantial improvement, the actual start of construction means the first alteration of any wall, ceiling, floor, or other structural part of a building, whether or not the alteration affects the external dimensions of the building.

**Storm Event**. An estimate of the expected amount of precipitation within a given period of time. For example, a 10-year frequency, 24-hour duration storm event is a storm that has a 10 percent probability of occurring in any one year.

Stormwater. Water resulting from rain, melting or melted snow, hail, or sleet.

**Stormwater Drainage System**. All means, natural or man-made, used for conducting stormwater to, through or from a drainage area to any of the following: conduits and appurtenant features, canals, channels, ditches, storage facilities, swales, streams, culverts, streets and pumping stations.

**Stormwater Facility**. All ditches, channels, conduits, levees, ponds, natural and manmade impoundments, wetlands, tiles, swales, sewers and other natural or artificial means of draining surface and subsurface water from land.

**Stormwater Management Facility**. A device that controls stormwater runoff and changes the characteristics of that runoff including, but not limited to, the quantity and quality, the period of release, or the velocity of flow.

**Stormwater Management System**. A collection of structural and non-structural practices and infrastructure designed to manage stormwater on a site. This system may include but is not limited to erosion control measures, stormwater drainage infrastructure, detention/retention facilities, and stormwater quality BMPs.

**Stormwater Pollution Prevention Plan**. A plan developed to minimize the impact of stormwater pollutants resulting from construction activities.

**Stormwater Quality Management Plan.** A comprehensive written document that addresses stormwater runoff quality.

**Stormwater Quality Measure.** A practice, or a combination of practices, to control or minimize pollutants associated with stormwater runoff.

**Stormwater Runoff.** The water derived from rain falling within a tributary basin, flowing over the surface of the ground or collected in channels or conduits.

**Strip Development.** A multi-lot project where building lots front on an existing road.

**Structure.** A structure that is principally above ground and is enclosed by walls and a roof. The term includes a gas or liquid storage tank, a manufactured home, or a prefabricated building. The term also includes recreational vehicles to be installed on a site for more than 180 days.

**Substantial Damage.** Damage of any origin sustained by a structure whereby the cost of restoring the structure to its before damaged condition would equal or exceed 50% of the market value of the structure before the damage occurred.

**Substantial Improvement.** Any reconstruction, rehabilitation, addition, or other improvement of a structure, the cost of which equals or exceeds 50% of the market value of the structure before the start of construction of the improvement. This term includes structures that have incurred repetitive loss or substantial damage regardless of the actual repair work performed. The term does not include improvements of structures to correct existing violations of state or local health, sanitary, or safety code requirements or any alteration of a historic structure, provided that the alteration will not preclude the structures continued designation as a historic structure.

<u>Subsurface Drain.</u> A pervious backfield trench, usually containing stone and perforated pipe, for intercepting groundwater or seepage.

**Surface Runoff.** Precipitation that flows onto the surfaces of roofs, streets, the ground, etc., and is not absorbed or retained by that surface but collects and runs off.

**Suspension.** The removal of a participating community from the NFIP because the community has not enacted and/or enforced the proper floodplain management regulations required for participation in the NFIP.

**Swale**. An elongated depression in the land surface that is at least seasonally wet, is usually heavily vegetated, and is normally without flowing water. Swales conduct stormwater into primary drainage channels and may provide some groundwater recharge.

**Temporary Stabilization.** The covering of soil to ensure its resistance to erosion, sliding, or other movement. The term includes vegetative cover, anchored mulch, or other non-erosive material applied at a uniform density of seventy percent (70%) across the disturbed area.

**Tile Drain**. Pipe made of perforated plastic, burned clay, concrete, or similar material, laid to a designed grade and depth, to collect and carry excess water from the soil.

**Topographic Map**. Graphical portrayal of topographic features of a land area, showing both the horizontal distances between the features and their elevations above a given datum.

**Topography**. The representation of a portion of the earth's surface showing natural and man-made features of a give locality such as rivers, streams, ditches, lakes, roads, buildings and most importantly, variations in ground elevations for the terrain of the area.

**Trained individual**. An individual who is trained and experienced in the principles of stormwater quality, including erosion and sediment control as may be demonstrated by state registration, professional certification (such as CESSWI and/or CPESC certification), or other documented and applicable experience or coursework as deemed sufficient by the City of Valparaiso that enable the individual to make judgments regarding stormwater control or treatment and monitoring.

**Tributary**. Based on the size of the contributing drainage area, a smaller watercourse which flows into a larger watercourse.

**Urban Drain**. A drain defined as "Urban Drain" in Indiana Drainage Code.

**Urbanization**. The development, change or improvement of any parcel of land consisting of one or more lots for residential, commercial, industrial, institutional, recreational or public utility purposes.

**Variance.** A grant of relief from the floodplain management provisions of this Unified Development Ordinance, which permits construction in a manner otherwise prohibited where specific enforcement would result in unnecessary hardship.

**Vegetated Swale.** A type of vegetative practice used to filter stormwater runoff via a vegetated, shallow-channel conveyance.

**Violation.** The failure of a structure or other development to be fully compliant with this section. A structure or other development without the elevation, other certification, or other evidence of compliance required in this section is presumed to be in violation until such time as that documentation is provided. Any action or inaction which violates the provisions of this Ordinance or the Technical Standards, the requirements of an approved stormwater management design plan or

permit, and/or the requirements of a recorded stormwater maintenance agreement may be subject to the enforcement actions outlined in this Ordinance. Any such action or inaction is deemed to be a public nuisance and may be abated by injunctive or other equitable relief in addition to, and separate from, the imposition of any of the enforcement actions described in this Ordinance.

**Water Quality.** A term used to describe the chemical, physical, and biological characteristics of water, usually in respect to its suitability for a particular purpose.

**Water Resources.** The supply of groundwater and surface water in a given area.

Watercourse. A lake, river, creek, stream, wash, channel or other topographic feature on or over which waters flow at least periodically. Watercourse includes specifically designated areas in which substantial flood damage may occur.

**Water Surface Elevation.** The height, in relation to the North American Vertical Datum of 1988 (NAVD 88), or National Geodetic Vertical Datum of 1929 (NGVD) (other datum where specified) of floods of various magnitudes and frequencies in the floodplains of riverine areas.

**Waterbody.** Any accumulation of water, surface, or underground, natural or artificial, excluding water features designed and designated as water pollution control facilities.

**Watercourse.** A lake, river, creek, stream, wash, channel or other topographic feature on or over which waters flow at least periodically. Watercourse includes specifically designated areas in which substantial flood damage may occur.

Watershed. The region drained by or contributing water to a specific point that could be along a stream, lake or other stormwater facility. Watersheds are often broken down into subareas for the purpose of hydrologic modeling.

**Watershed Area.** All land and water within the confines of a drainage divide. See also Watershed.

**Wetlands.** Areas that are inundated or saturated by surface water or groundwater at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions.

**Weir**. A channel-spanning structure for measuring or regulating the flow of water.

**X Zone.** The area where the flood hazard is less than that in the SFHA. Shaded X zones shown on recent FIRMs (B zones on older FIRMs) designate areas subject to inundation by the flood with a 0.2% chance of being equaled or exceeded (the 500-year flood). Unshaded X zones (C zones on older FIRMs) designate areas where the annual probability of flooding is less than 0.2%.

**Zone.** A geographical area shown on a FIRM that reflects the severity or type of flooding in the area.

**Zone A.** See definition for A ZONE.

**Zone B, C, AND X.** Areas identified in the community as areas of moderate or minimal hazard from the principal source of flood in the area. However, buildings in these zones could be flooded by severe, concentrated rainfall coupled with inadequate local drainage systems. Flood insurance is available in participating communities but is not required by regulation in these zones. (Zone X is used on new and revised maps in place of Zones B and C.)



## **Planning Department Staff Report**

166 Lincolnway ● Valparaiso, IN 46383 (219) 462 – 1161 ● <u>www.valpo.us</u>

The Executive Summary herein remains the same as presented for the Plan Commission meeting held on June 4, 2024. (The zoning map reference has been moved to the end of the document.)

At the June Plan Commission meeting, it was requested that the Planning Department prepare notes to guide reviewers through the changes. Rather than the mess of the redlined version, the Planning Department offers a "before and after" review of Article 13. An annotated proposed draft and the existing document are within this packet.

#### EXECUTIVE SUMMARY OF UPDATES TO UNIFIED DEVELOPMENT ORDINANCE

## ARTICLE 2, specifically pertaining to dorms/frats/sororities/boarding houses in RT zoning

The proposal restricts dorms/frats/sororities to CA Campus zoning (removes them as a permitted use in RT Residential Transition zoning). These uses are specifically associated with campus life. They are typically much more intense residential uses than other residential offerings in the Hilltop neighborhood. Parking and noise have been ongoing issues for the neighborhood. Having these campus uses permitted only in CA Campus zoning enables the university to have a bigger role in enforcement and better safeguards the residential neighborhood from these uses dropping into the neighborhood without careful review (like a Use Variance through the Board of Zoning Appeals).

This proposal also removes the "boarding house" term from the use chart. Planning staff plans an overall look at various alternate housing types in a subsequent amendment. At this time, there are no known boarding houses in the City; these are specific to the standard definition of a boarding house having meals provided.

#### **ARTICLE 13, Nonconformities**

The proposal cleans up a technical Article of the code that regulates lots, structures, and uses that were legal when they were platted, built, or initiated, but are no longer allowed under current development standards. The goal of the section is to allow legal nonconformities until they are removed, but not encourage their survival. It is important to staff that this section to be coherent so that we can give clear answers to businesses and residents and in code enforcement proceedings.

- The update reorganizes the Article to make it clearer and less confusing.
- Nonconforming Signs are redirected to Article 5, Signs.
- Nonconforming Uses and Structures are clarified.
- Some topics are repackaged:
  - o Major and Minor Nonconformities are combined as no difference in regulation.
  - o Right-to-farm ordinances are referenced, but not copied safer for any state code changes.
  - Special provisions for damage to manufactured home or mobile home which were vaguely placed as
    if an overall general nonconformity issue are now referenced as exclusion in the Nonconforming
    Building or Structure section.
- Some topics are removed:
  - Mitigation of Nonconformities The process was inappropriate, duplicative at best. The
    appropriate process for removing the nonconforming status of a use (to have less restrictions) is a
    Use Variance or a rezoning to a zoning district that permits the use.


- o Miscellaneous details regarding Nonconforming Signs were removed as they were duplicative of ordinance plans in Article 5, Signs.
- o Miscellaneous details regarding Telecommunication Towers were removed as they were duplicative of ordinances plans in Article 2, Permitted Uses and Supplemental Standards.

#### Other notes:

• Nonconforming Use and Buildings in Floodplains – what is being relabeled now as Section 13.305 had only necessary relabeling corrections done. This section will be reviewed by the Engineering Department in a future UDO update.

Proposal is presented in packet in clean and redline versions. Existing Article 13 in its entirety is online.

Figure 1. Zone Map showing extent of Residential Transition Zone (light blue)

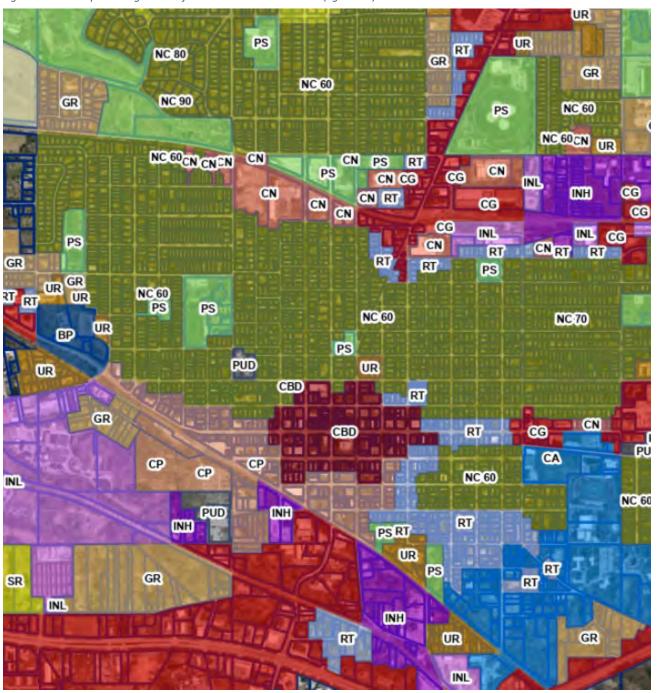

## FROM ARTICLE 2, DIVISION 2.200, USES BY DISTRICT

From: Boarding House listed To: Boarding House not listed

From: P, Permitted
To: X, Prohibited

Table 2.201.A.  Agricultural, Residential, and Institutional Uses  P = Permitted use; L = Limited Use review; S = Special Use review; X = prohibited															l use	
r - reili	litteu	use, i	. –	illitet	i USE	TEVIC			istrict		VIEW	, A -	JI UII	ontec	u use	
Land Use	ER 1	SR 2	GR 3	UR 4	NC 5	RU 6	CN 7	CG 8		CP 10	RT 11	CA 12	BF 14	INL 14	INH 15	Limited / Special Use Standard
Agricultural Uses													T			
Agriculture		Х	Х	Х	Х	Р	Х	Х	Х	Х	Х	$P^{16}$	х	Х	Х	
Greenhouses or Nursery		Х	Х	Х	Х	L	Х	Х	Х	Х	Х	$P^{16}$	Х	L	Х	Sec. 2.502
Farmstead		Х	Х	Х	Х	Р	Х	L	Х	Х	Х	X	Х	Х	Х	
Intensive Agriculture	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	k	Х	Х	Х	
Commercial Stables	Х	Х	Х	Х	Х	L	Х	Х	Х	Х	Х	Х	Х	Х	Х	Sec. 2.501
Kennel		Х	Х	Х	Х	L	S	L	Х	Х	Х	Х	L	L	Х	Sec. 2.503
Residential Uses																
Boarding House, Dormitory, Fraternity, or Sorority		х	X	х	х	X	х	х	х	х	X	P <sup>16</sup>	Х	х	х	
Single-Family	Р	Р	Р	Р	Р	Р	L	L	Х	Р	Р	Х	Х	L	S	Sec. 2.504
Single-Family Cluster		Р	Р	Х	Х	L	Х	Х	Х	Х	Х	Х	Х	Х	Х	Sec. 2.505
Single-Family Attached		X	L	Р	X	X	Х	X	Х	Р	S	Х	Х	Х	X	Sec. 2.506
Planned or TND <sup>17</sup>		P <sup>18</sup>	$P^{18}$	P <sup>18</sup>	Х	Х	Х	Х	Х	$P^{18}$	Х	Х	Х	Х	Х	
Multifamily	Х	Х	Х	Р	Х	Х	Х	L	L	L	S	$P^{16}$	Х	Х	Х	Sec. 2.507
Manufactured Home Park or Subdivision	Х	Х	s	Х	P <sup>19</sup>	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Sec. 2.508
Group Homes	Р	Р	Р	Р	Р	L	Х	Х	Х	Х	Х	$P^{16}$	Х	Х	Х	Sec. 2.509
Live-Work Units	Х	Х	Х	Х	Х	Х	Р	Р	Р	Р	L	Х	Х	Х	Х	Sec. 2.510
Manufactured Home <sup>20</sup>		L	L	L	L	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Sec. 2.511

FROM ARTICLE 18, DIVISION 18.200, USE DEFINITIONS

## Sec. 18.202 Residential Uses

- A. Boarding House, Dormitory, Fraternity, or Sorority means any dwelling, other than a hotel or bed and breakfast establishment, where, for compensation:
  - -1. Lodging and meals are provided; or
  - 2. Sleeping accommodations and common kitchen facilities are provided for individuals while they are enrolled at an educational institution.

## FROM ARTICLE 18, DIVISION 18.400, GENERAL DEFINITIONS (not changing at this time)

**Building** means a structure that has a roof and walls, and which is intended to shelter people, animals, property, or business activity, and includes any structure used or intended to be used for supporting or sheltering a use or occupancy. The term "building" shall be construed as if it were followed by the words "or part or parts thereof and all equipment therein." (For floodplain regulations applicability, see Division 18.400, Floodplain Management Definitions, "Structure.")

Nonconforming Building. See Section <u>13.201</u> Types of Nonconformities.

**Nonconforming Lot.** See **Section 13.201** Types of Nonconformities.

**Nonconforming Situation** means a nonconforming building, nonconforming structure, nonconforming lot, nonconforming use, or nonconforming sign. See **Section 13.201 Types of Nonconformities.** 

**Nonconforming Use.** A use of land or use of a building or structure lawfully existing at the time this Ordinance or a subsequent amendment to this Ordinance became effective which does not conform to the use requirements of the district in which it is located.

**Structural Alterations.** Any change in the supporting members of a building, such as bearing walls, columns, beams or girders and floor joists, ceiling joists, roof rafters, or stairways.

**Structure.** Any man-made object having an ascertainable stationary location on land or in water, whether or not affixed to the land. (For floodplain regulations applicability, see Division 18.400, Floodplain Management Definitions, "Structure.")

**Structure, Permanent.** A structure placed on or in the ground or attached to another structure in a fixed position.

**Structure, Temporary.** A structure that is designed to be repeatedly erected or inflated (tents and inflatable structures) or buildings that are picked up and moved.

# **ARTICLE 13 NONCONFORMITIES**

## **DIVISION 13.100 PURPOSE AND APPLICABILITY**

# Sec. 13.101 Purpose

Sections 13.101 and 13.102: Most Articles in the UDO start with Purpose and Applicability. Such is suggested

here.

The purpose of this Article is to permit legal nonconformities yet secure the gradual or eventual elimination of them by restricting and diminishing them.

## Sec. 13.102 Applicability

This Article establishes regulations for lots, uses, buildings, structures, and signs, that were legally established, but no longer conform to the City's land development regulations.

## **DIVISION 13.200 TYPES OF NONCONFORMITIES**

## Sec. 13.201 Types of Nonconformities

- A. **General Types of Legal Nonconformity.** There are four general types of legal nonconformities that are recognized by this UDO.
  - 1. **Lots.** A lawfully established lot, not held in common with any other lot, that does not meet the area or other dimensional standards of this UDO, is a legal lot which is subject to the provisions of this Article.
  - 2. **Nonconforming Uses.** This term applies to nonconforming uses of land and/or nonconforming uses within buildings or structures. The following uses are legally nonconforming uses:
    - Uses that were lawfully established but are not currently listed as Permitted, Limited, or Special Uses in the district in Section 2.201, Permitted, Limited, and Special Uses, are nonconforming uses.
    - b. Uses that are listed as Special Uses or Limited Uses in a district, but were lawfully established without Special Use or Limited Use approval. For these uses, the nonconforming use status may be removed by obtaining the relevant approval (including prescribed standards). (see **Article 2**, **Permitted Uses and Supplemental Standards**).
    - c. Uses that were lawfully established within a floodplain or floodway, but are no longer permitted in the floodplain or floodway.
  - 3. **Nonconforming Buildings or Structures.** The following are legally nonconforming buildings or structures:
    - a. Buildings or structures that fail to meet the development type (including unit count) or bulk standards related to buildings or structures (density, intensity, setbacks, and height) of this UDO.

#### Sections 13.201:

Lots were moved up to be addressed first, as typical practice in a zoning ordinance. No content changes were made to the regulations concerning Lots.

The descriptions of Nonconforming Uses and Nonconforming Buildings and Structures were made more complete.

- b. Buildings or structures that were lawfully established within a floodplain or floodway, but are no longer permitted due to their location or elevation within the floodplain or floodway.
- 4. Nonconforming Signs. See Article 5, Signs.
- B. **Unlawful Uses, Buildings, Structures, Lots, or Signs.** A lot, use, building, structure, or sign that did not comply with applicable laws at the time it was established, constructed, or created, is an unlawful lot, use, building, structure, or sign. Unlawful lots, uses, buildings, structures, and signs are violations of this UDO and are not subject to this **Article 13, Nonconformities**.

## **DIVISION 13.300 GENERAL REGULATIONS**

#### Sec. 13.301 General Burden of Proof

A person/entity who claims a (legal) nonconforming use has the burden of establishing the claim.

# Sec. 13.302 Construction on Legal Lots That Do Not Conform to Dimensional Requirements

A. Combination of Lots to Increase Conformity.

- 1. Where a landowner owns several abutting lots that do not conform to the dimensional requirements of the district in which they are located, they shall combined to create fully conforming lots or, if full conformity is not possible, they shall be combined to the extent that the combination increases the degree of conformity.
- 2. The City will not require the combination of lots pursuant to paragraph A.1., above, if either:
  - a. Two or more of the lots are developed with principal buildings, and the combination of lots would require that one or more of the buildings be torn down in order to comply with this UDO; or
  - b. The combination of lots would materially disrupt the character of the neighborhood, for example, by creating a through lot mid-block on a street segment that does not include any other through lots.
- B. Construction on Legal Lots That Do Not Conform to Dimensional Requirements. A legal lot that does not meet district requirements with respect to area, lot width, or frontage may be built upon if:
  - 1. The lot is a lot of record: and
  - 2. The use is permitted in the district in which the lot is located;
  - 3. The lot has sufficient frontage on a public street to provide access that is appropriate for the proposed use;
  - 4. All yards or height standards are complied with, except that the Planning Director may authorize a reduction of required yards of up to 10 percent, provided that the Planning Director finds that the reduction does not allow a building that would be larger than permitted on a conforming lot.

Section 13.301: Simplification and removal of improper Indiana Code reference.

Section 13.302: (previously 13.305) Moved ahead in list of topics typically reviewed in nonconformities sections, but no other changes made at this time.

5/29/2024 DRAFT Revisions to Article 13 Nonconformities PAGE2 06/24/24 Format Modifications and Summary Notes

Section 13.303: (previously in 13.302, 13.303, 13.304, and in title of 13.307 but damage/ destruction of nonconforming uses was not addressed in such.) Proposal provides easier navigation and more thorough coverage of typical topics concerning Nonconforming Uses.

# Sec. 13.303 Restrictions for Nonconforming Uses

- A. **Generally.** Where nonconforming uses of a premises would not be permitted by the provisions of this UDO, such uses may continue so long as they remain otherwise lawful, subject to compliance with the following provisions. Should the following provisions be in conflict with Section 13.305 Nonconforming Buildings or Uses in the Floodplain or IC 36-7-4-1019, the provisions of Section 13.305 and/or IC36-7-4-1019 shall govern.
- B. **Maintenance.** Although routine maintenance is described in Section 13.304 Restrictions for Nonconforming Buildings and Structures, nonconforming uses may be housed in either conforming or nonconforming buildings or structures (or on premises without any structures). Routine maintenance is permitted to the extent said maintenance does not extend or intensify the nonconforming use.

## C. Alteration, Enlargement, or Extension.

- 1. A nonconforming use shall not be altered, enlarged, or extended to occupy additional space than upon initial approval. Additionally, no structural alteration of any kind shall be made in any building or structure containing a nonconforming use, except in the following situations:
  - a. When the alteration is required by law;
  - b. When the alteration will result in eliminating the nonconforming use; or
  - c. When a building or structure in a residential district containing residential nonconforming use(s) is altered in any way to improve livability, provided that no structural alterations are made that increase the number of dwelling units, bedrooms, floor area, nor increase the nonconformity of the building in any way.
- 2. Such legal nonconforming use shall not be moved in whole or in part to any portion of the lot or parcel other than that occupied by such use;
- 3. No additional building or structure shall be erected in connection with such legal nonconforming use;
- 4. A legally established nonconforming parking area, outside storage area, or outside operations area may be maintained, repaired, or upgraded with pavement provided that:
  - a. There is no increase in the total area occupied by the parking area, outside storage area, or outside operations area;
  - b. If, in the discretion of the Planning Director, pavement would serve to reduce a potential negative impact of the exiting parking area, outside storage area, or outside operations area on surrounding properties (e.g., reduction in dust, noise, erosion, etc.); and
  - c. Such pavement shall require proper permit(s) and shall also be subject to full review under and compliance with the stormwater management requirements.
- B. **Destruction.** If any building or structure that houses a nonconforming use is destroyed by any means, such use shall lose its nonconforming status and shall

not be reestablished. (To be destroyed means to suffer damage to the extent of more than fifty percent (50%) of the replacement cost of the building or structure based on a current appraisal and damage report by a qualified professional, exclusive of foundation.) Any future uses shall conform to this UDO. Should the following provisions be in conflict with IC 36-7-4-1019, the provisions of IC 36-7-4-1019 shall govern.

- C. **Discontinuance.** A nonconforming use shall remain an active use to maintain its legal nonconforming classification. Whenever a nonconforming use is discontinued for a period of 180 consecutive days, regardless of the owner's intent, such use shall lose its legal nonconforming status and shall not thereafter be reestablished. Any future uses shall conform to this UDO. This excludes right to farm legislation measures in IC 36-7-4-616.
- D. **Early Abandonment.** A nonconforming use shall be presumed to be abandoned before the period specified in the Discontinuance subsection above if the intent of the owner or occupant to discontinue the nonconforming use is obvious to the reasonable person.
- E. **Conversion.** After a nonconforming use is converted to a conforming use, the use may not thereafter be converted back to any non-conforming use. A nonconforming use shall not be converted to any other legal nonconforming use without Use Variance approval or rezoning to a district that permits the land use. This excludes right to farm legislation measures in IC 36-7-4-616.
- F. Change of Ownership. Change of ownership does not impact the legality of a nonconforming use unless such was specified in the approval of said use. (For instance, a Use Variance that was to apply to the Petitioner only, only to find the property changed hands and the use continued. The use under new ownership would be an unlawful use.)

# Sec. 13.304 Restrictions for Nonconforming Buildings and Structures

- A. **Generally.** Where a nonconforming building or structure exists that could not be rebuilt under the terms of this UDO by reason of development type (including unit count) or bulk standards related to buildings or structures (density, intensity, setbacks, and height), such building or structure may continue to exist so long as it remains otherwise lawful, subject to compliance with the following provisions. This Section excludes the topic of Nonconforming Signs, addressed in Article 5, Signs. Should the following provisions be in conflict with Section 13.305 Nonconforming Buildings or Uses in the Floodplain or IC 36-7-4-1019, the provisions of Section 13.305 and/or IC36-7-4-1019 shall govern.
- B. **Maintenance**. Routine maintenance of a nonconforming building or structure is permitted, including necessary non-structural repairs, wiring, plumbing, fixtures, paint, and incidental alterations which do not materially extend the life of the nonconforming structure. Of note, routine maintenance/repair is not, for instance, optional replacement of non-structural walls or rewiring/replumbing a building.
- C. **Alteration or Enlargement.** Alteration or enlargement of a nonconforming building or structure shall not increase the extent of nonconformity.

Section 13.304:
(previously pieced out in 13.304 and 13.307) Proposal provides easier navigation and more thorough coverage of typical topics concerning Nonconforming Buildings/

- D. **Damage.** When a nonconforming building or structure is damaged to the extent of fifty percent (50%) or less the replacement cost of the structure based on a current appraisal and damage report by a qualified professional, exclusive of foundation based on a current appraisal, the building or structure may be rebuilt in the same location, using the same building footprint, provided that rebuilding begins within one (1) year of the event which caused the damage. Rebuilding shall be diligently pursued to completion or the right to restore the building or structure as nonconforming shall be forfeited. Restoration of a nonconforming building or structure shall not increase the extent of nonconformity existing prior to such damage. Of note, such building or structure may be altered so as to decrease the extent of nonconformity.
- E. **Destruction.** Should a nonconforming structure or portion of a structure be destroyed by any means, it shall not be rebuilt, restored, or reconstructed, or occupied for any use not permitted in the district in which the property is located unless the structure will then conform to all regulations of this Ordinance. To be destroyed means to suffer damage to the extent of more than fifty percent (50%) of the replacement cost of the building or structure based on a current appraisal and damage report by a qualified professional, exclusive of foundation.
- F. **Relocation.** Should such nonconforming building or structure be relocated for any reason for any distance whatsoever, such shall be in conformity with the provisions of this UDO.

# Sec. 13.305 Nonconforming Buildings or Uses in the Floodplain

- A. **Generally.** Existing buildings or uses in the floodplain that do not conform to the standards of **Article 4**, **Site Capacity and Environmental Standards**, as it pertains to floodplains and floodways, are nonconforming. Such uses or structures are susceptible to flood damage, and the City may incur substantial costs should such flood damage occur. Therefore, elimination of the nonconformity or correction of violations are a priority.
- B. **Damaged Buildings.** In general, building permits for substantial repair of flood damage (that is, repairs with a value equal to 50 percent or more of the value of the building or structure sought to be repaired) within special flood hazard areas are subject to the standards of **Division 4.500**, **Floodplain Management.**
- C. **Substantial Repairs.** Building permits shall not be issued for substantial repair of flood damage in the following circumstances:
  - 1. If the standards of <u>Division 4.500</u>, **Floodplain Management** cannot be met, the building or structure cannot be rebuilt, and its use shall be discontinued.
  - 2. Buildings, except mobile homes and manufactured homes, that are located on parcels on which it is feasible to relocate the building out of the floodplain. However, if it is not feasible to relocate the building, building permits may be issued only if the work includes elevating or floodproofing the building as provided in <u>Division 4.500</u>, Floodplain Management.

Section 13.305: (previously 13.306) Section number changed due to changes elsewhere within the Article. No content changes were made at this time, only proper citing of Division 4.500 references. This section will be reviewed in more detail with Engineering Department review of floodplain matters soon.

- 3. Mobile homes or manufactured homes that are damaged or moved from their foundations by floodwaters, except that mobile homes or manufactured homes may be replaced by new mobile homes or manufactured homes, provided that:
  - a. The replacement is according to the applicable standards set out in **Division 4.500**, **Floodplain Management**; and
  - b. The replacement home is manufactured or constructed under authority of 42 U.S.C. Sec. 5403, Federal Manufactured Home Construction and Safety Standards.
- 4. Mobile homes or manufactured homes that are damaged by flooding such that the cost of repair is more than 30 percent of the value of the building shall be relocated out of the special flood hazard zone when practicable. If it is not practicable to move the mobile home or manufactured home, it shall either be:
  - a. If located within Flood Zone A, A1-30, AH, or AE:
    - i. Located where the difference in elevation between the site and street and the flood elevation is less than one foot, and
    - ii. The bottom of the structure is elevated at least two feet above the base flood elevation; or
  - Brought into compliance with the requirements of "Standards for Manufactured Homes and Recreational Vehicles" as contained in Division 4.500, Floodplain Management.
- Any alteration, repair, reconstruction or improvements to a structure that is in compliance with the provisions of <u>Division 4.500</u>, <u>Floodplain</u> <u>Management</u> shall meet the requirements of "new construction" as contained in <u>Division 4.500</u>, <u>Floodplain Management</u>; and,
- Any alteration, repair, reconstruction or improvement to a structure that is not in compliance with the provisions of <u>Division 4.500</u>, <u>Floodplain</u> <u>Management</u>; shall be undertaken only if said non-conformity is not further, extended, or replaced.

Regarding sections that disappeared with these proposed revisions:

(current) Section 13.202 (Major and Minor Nonconforming Uses, Buildings and Structures): Per current 13.303, abandonment/discontinuance of major/minor nonconformities have the same results -- loss of (legal) nonconforming status. "Should be eliminated" is a suggestion, not enforceable. See DRAFT REVISIONS ABOVE document for proposed changes.

(current) Section 13.301 (regarding special provisions for damage to manufactured home or mobile home): References have been made in the "Generally" sections where relevant to ensure that the entirety of the protections to damaged manufactured homes/mobile homes are referenced, and, if state code changes, reference is appropriate.

(current) Section 13.302 and 13.303 (regarding Agricultural Uses): Agricultural uses are rare in the city. Agricultural uses are protected by state code. What was provided for in the UDO was not complete. References have been made in the "Generally" sections where relevant to ensure that the entirety of the protections are referenced, and, if state code changes, reference is appropriate.

(current) Section 13.303 and 13.304 (Telecommunications, Signage): These topics in this Article were duplicative small portions compared to more robust sections elsewhere in the UDO, so removed from this Article.

(current) DIVISION 13.400 (Mitigation of Nonconformities): The process was inappropriate. A Nonconforming Building /Structure/Sign cannot obtain a Special Use, as a building/structure/sign is not a "use". The appropriate process for removing the nonconforming status of a use (to have less restrictions) is a Use Variance or a rezoning to a zoning district that permits the use. The appropriate process for removing the nonconforming status of a building/structure/sign is a variance from development standards. Except for a rare case, this idea of lessening the burden of (legal) nonconforming restrictions goes against the intent of the Article (restricting nonconforming situations). The basic premise of (legal) nonconforming matters is they exist until they do not, not to enable them to grow/reestablish themselves once gone.

# **ARTICLE 13 NONCONFORMITIES**

## **DIVISION 13.100 PURPOSE**

## Sec. 13.101 Purpose

The purpose of this Division is to establish regulations for lots, buildings and structures, signs, and uses that were legally established, but no longer conform to the City's land development regulations.

## **DIVISION 13.200 TYPES AND CLASSES OF NONCONFORMITIES**

## Sec. 13.201 Types of Nonconformities

- A. **General Types of Legal Nonconformity.** There are four general types of legal nonconformities that are recognized by this UDO.
  - 1. **Nonconforming Uses.** The following uses are legally nonconforming uses:
    - a. Uses that were lawfully established but are not currently listed as Permitted, Limited, or Special Uses in the district in **Section 2.201**, **Permitted**, **Limited**, **and Special Uses**, are nonconforming uses.
    - b. Uses that are listed as Special Uses in a district, but were lawfully established without a special use permit. For these uses, the nonconforming use status may be removed by obtaining a Special Use permit. (see **Section 15.706**, **Special Uses**).
    - c. Uses that were lawfully established within a floodplain or floodway, but are no longer permitted in the floodplain or floodway.
  - 2. **Nonconforming Buildings or Structures.** The following are legally nonconforming buildings or structures:
    - a. Buildings or structures that fail to meet the density, intensity, setback, bufferyard, height, parking, or bulk requirements of this Code.
    - b. Buildings or structures that were lawfully established within a floodplain or floodway, but are no longer permitted due to their location or elevation within the floodplain or floodway.
  - 3. **Lots.** A lawfully established lot, not held in common with any other lot, that does not meet the area or other dimensional standards of this UDO, is a legal lot which is subject to the provisions of this Article.
  - 4. Nonconforming Signs. See Division 5.200, Pre-existing, Prohibited, and Nonconforming Signs.
- B. **Unlawful Uses, Buildings, Structures, Lots, or Signs.** A use, building, structure, lot, or sign that did not comply with applicable laws at the time it was established, constructed, or created,

is an unlawful use, building, structure, lot, or sign. Unlawful uses, buildings, structures, lots, and signs are violations of this UDO and are not subject to this **Article 13**, **Nonconformities**.

# Sec. 13.202 Major and Minor Nonconforming Uses, Buildings and Structures

- A. **Generally.** Nonconforming uses and nonconforming buildings and structures, are further classified as major or minor, as provided in this Section.
- B. **Major Nonconformities.** Major nonconformities are those for which the nonconformity generates a nuisance *per se* or represents such incompatibility with adjacent uses and/or the Comprehensive Plan that they should be eliminated when discontinued, abandoned, or destroyed. The following are major nonconformities:
  - 1. Automotive disposal;
  - 2. Automotive salvage recycler;
  - 3. Automotive salvage rebuilder;
  - 4. Disposal;
  - 5. Recycling;
  - 6. Salvage;
  - 7. Scrap metal processing; and
  - 8. Billboards.
- C. **Minor Nonconformities.** All nonconforming uses, buildings and structures that are not classified as major nonconformities are minor nonconformities. These can be turned into conforming uses pursuant to **Division 13.400**, **Mitigation of Nonconformities**.

## **DIVISION 13.300 GENERAL REGULATIONS**

#### Sec. 13.301 General Burden of Proof

The party alleging the existence of a nonconforming use or variance granted by the Board of Zoning Appeals has the burden of proof on that issue. The nonexistence of a nonconforming use or variance need not be proved.

Statutory Cross-Reference: IC 36-7-4-1019.

# Sec. 13.302 Change or Conversion of Use

- A. **Generally.** A nonconforming use shall not be changed to any other nonconforming use unless the proposed nonconforming use is mitigated in accordance with the applicable standards of **Division 13.400**, **Mitigation of Nonconformities**.
- B. **Agriculture.** Nonconforming agricultural uses:
  - 1. May change to other nonconforming agricultural uses;
  - 2. May not be terminated by the City if they are maintained for three years during any five year period;
  - 3. May not be restricted; and
  - 4. May not be subject to variances, special exceptions, special uses, contingent uses, or conditional uses. However, agricultural uses are subject to compliance with state environmental and health safety laws, and zoning regulations that apply to conforming agricultural uses.

## Sec. 13.303 Abandonment or Discontinuance of Use

### A. Non-Agricultural Uses.

- 1. **Minor Nonconforming Uses.** Whenever a minor nonconforming use is abandoned or discontinued for a period of 180 consecutive days, such use shall not thereafter be reestablished, and any future uses shall conform to this UDO.
- 2. **Major Nonconforming Uses.** Discontinuance of a major nonconforming use for a period of 180 consecutive days constitutes abandonment of the use, regardless of the owner's intent, and the major nonconforming use shall not be thereafter reestablished.
- 3. **Early Abandonment.** A nonconforming use shall be presumed to be abandoned before the period specified in subsection A.1. or A.2. if the intent of the owner or occupant to discontinue the nonconforming use is obvious to the reasonable person.
- B. **Agricultural Uses.** Nonconforming agricultural uses are abandoned if they are discontinued for three years out of any five year period.
- C. **Telecommunications Towers.** The owner of the property upon which a telecommunications tower is installed shall dismantle the tower and all associated structures if no functioning antenna is attached to the tower for 180 consecutive days. If the site is not redeveloped for another use, it shall be planted with vegetation to minimize erosion.

Statutory Reference: Subsection B. IC-36-7-4-616; Existing Code Section 535.

## Sec. 13.304 Alternation, Enlargement, or Extension

## A. Repairs and Alterations of Nonconforming Buildings or Structures

- 1. Routine maintenance of a nonconforming building or structure, or of a conforming building or structure containing a nonconforming use, is permitted, including necessary non-structural repairs, paint, and incidental alterations which do not extend or intensify the nonconforming use or materially extend the life of the nonconforming structure.
- 2. No structural alteration shall be made in any structure containing a nonconforming use, except in the following situations:
  - a. When the alteration is required by law;
  - b. When the alteration will result in eliminating the nonconforming use or structure; or
  - c. When a building in a residential district containing residential nonconforming uses is altered in any way to improve livability, provided that no structural alterations are made that increase the number of dwelling units or the bulk of the building.
- 3. No building or structure that contains a major nonconforming use shall be enlarged unless the major nonconforming use is permanently discontinued.

### B. Expansion of Nonconforming Uses.

- 1. Major nonconforming uses shall not be expanded.
- 2. No minor nonconforming use shall be expanded or extended in such a way as to occupy:
  - a. Any open space or landscaped area that is required by this UDO; or
  - b. Any land beyond the boundaries of the property or lot as it existed on the effective date of this UDO.

3. No minor nonconforming use shall be expanded to displace any conforming uses in the same building or on the same parcel.

## C. Nonconforming Buildings or Structures.

- 1. Nonconforming buildings or structures shall not be altered or expanded in any manner unless building coverage and floor area remain within the limits permitted by this UDO.
- 2. No expansion or alteration of a building or structure shall increase the degree of nonconformity. For example, if a building is set back five feet from a property line and the UDO requires a setback of eight feet, then no portion of an addition could come closer to the property line than the minimum required eight feet, except as allowed in the NC District pursuant to **Division 3.400**, **Neighborhood Conservation**.

### D. Nonconforming Signs.

- 1. Nonconforming signs may not be enlarged or altered in a way that increases their nonconformity, but any structure or portion thereof may be altered to come into conformance with this UDO.
- 2. A nonconforming sign which has been damaged by fire, wind or other cause in excess of 60 percent of its replacement cost shall not be restored except in conformance with the applicable regulations in this UDO.
- 3. A nonconforming sign shall be properly maintained so that such sign does not constitute a danger to the public health and welfare.

# Sec. 13.305 Construction on Legal Lots That Do Not Conform to Dimensional Requirements

## A. Combination of Lots to Increase Conformity.

- 1. Where a landowner owns several abutting lots that do not conform to the dimensional requirements of the district in which they are located, they shall combined to create fully conforming lots or, if full conformity is not possible, they shall be combined to the extent that the combination increases the degree of conformity.
- 2. The City will not require the combination of lots pursuant to paragraph A.1., above, if either:
  - a. Two or more of the lots are developed with principal buildings, and the combination of lots would require that one or more of the buildings be torn down in order to comply with this UDO; or
  - b. The combination of lots would materially disrupt the character of the neighborhood, for example, by creating a through lot mid-block on a street segment that does not include any other through lots.
- B. **Construction on Legal Lots That Do Not Conform to Dimensional Requirements.** A legal lot that does not meet district requirements with respect to area, lot width, or frontage may be built upon if:
  - 1. The lot is a lot of record; and
  - 2. The use is permitted in the district in which the lot is located;
  - 3. The lot has sufficient frontage on a public street to provide access that is appropriate for the proposed use;
  - 4. All yards or height standards are complied with, except that the Planning Director may authorize a reduction of required yards of up to 10 percent, provided that the Planning

Director finds that the reduction does not allow a building that would be larger than permitted on a conforming lot.

# Sec. 13.306 Nonconforming Buildings or Uses in the Floodplain

- A. **Generally.** Existing buildings or uses in the floodplain that do not conform to the standards of **Article 4, Site Capacity and Environmental Standards**, as it pertains to floodplains and floodways, are nonconforming. Such uses or structures are susceptible to flood damage, and the City may incur substantial costs should such flood damage occur. Therefore, elimination of the nonconformity or correction of violations are a priority.
- B. **Damaged Buildings.** In general, building permits for substantial repair of flood damage (that is, repairs with a value equal to 50 percent or more of the value of the building or structure sought to be repaired) within special flood hazard areas are subject to the standards of **Division 4.500, Floodplain and Wetland Standards.**
- C. **Substantial Repairs.** Building permits shall not be issued for substantial repair of flood damage in the following circumstances:
  - 1. If the standards of **Division 4.500, Floodplain and Wetland Standards** cannot be met, the building or structure cannot be rebuilt, and its use shall be discontinued. The City will work with Federal and other local agencies to assist in relocation.
  - 2. Buildings, except mobile homes and manufactured homes, that are located on parcels on which it is feasible to relocate the building out of the floodplain. However, if it is not feasible to relocate the building, building permits may be issued only if the work includes elevating or floodproofing the building as provided in **Division 4.500**, **Floodplain and Wetland Standards**.
  - 3. Mobile homes or manufactured homes that are damaged or moved from their foundations by floodwaters, except that mobile homes or manufactured homes may be replaced by new mobile homes or manufactured homes, provided that:
    - a. The replacement is according to the applicable standards set out in **Division 4.500**, **Floodplain and Wetland Standards**; and
    - b. The replacement home is manufactured or constructed under authority of **42 U.S.C. Sec. 5403, Federal Manufactured Home Construction and Safety Standards.**
  - 4. Mobile homes or manufactured homes that are damaged by flooding such that the cost of repair is more than 30 percent of the value of the building shall be relocated out of the special flood hazard zone when practicable. If it is not practicable to move the mobile home or manufactured home, it shall either be:
    - a. If located within Flood Zone A, A1-30, AH, or AE:
      - i. Located where the difference in elevation between the site and street and the flood elevation is less than one foot, and
      - ii. The bottom of the structure is elevated at least two feet above the base flood elevation; or
    - b. Brought into compliance with **Section [@@483], Manufactured Homes and Recreational Vehicles.**
  - 5. Any alteration, repair, reconstruction or improvements to a structure that is in compliance with the provisions of **Division 4.500**, **Floodplain and Wetland Standards** shall meet the requirements of "new construction" as contained in **Division 4.500**, **Floodplain and Wetland Standards**; and,

6. Any alteration, repair, reconstruction or improvement to a structure that is not in compliance with the provisions of **Division 4.500**, **Floodplain and Wetland Standards**; shall be undertaken only if said non-conformity is not further, extended, or replaced.

# Sec. 13.307 Damage to Nonconforming Uses and Structures

A. **Generally.** Should a nonconforming structure or portion of a structure be destroyed by any means, it shall not be rebuilt, restored, or reconstructed, or occupied for any use not permitted in the district in which the property is located unless the structure will then conform to all regulations of this Ordinance. To be destroyed means to suffer damage to the extent of more than fifty percent (50%) of the replacement cost of the structure based on a current appraisal and damage report by a qualified professional, exclusive of foundation.

When a nonconforming structure is damaged to the extent of fifty percent (50%) or less the replacement cost of the structure based on a current appraisal and damage report by a qualified professional, exclusive of foundation based on a current appraisal, the structure may be rebuilt in the same location, using the same building footprint, provided that rebuilding begins within one (1) year of the event which caused the damage. Rebuilding shall be diligently pursued to completion or the right to restore the structure as a nonconforming structure shall be forfeited. Restoration of a nonconforming structure pursuant to this subsection shall not increase the degree of nonconformance or noncompliance existing prior to such damage.

On any nonconforming structure or portion of a structure, work may be done on ordinary repairs, or on repair or replacement of non-bearing walls, fixtures, wiring, or plumbing, provided that a building permit is obtained where necessary. Repairs shall not be permitted if the structure or any portion thereof is declared to be unsafe by any official charged with protecting the public safety.

## **DIVISION 13.400 MITIGATION OF NONCONFORMITIES**

## Sec. 13.401 Purpose

Many minor nonconforming uses have existed for a period of time, and some may have only recently become nonconforming. In many instances, minor nonconforming uses are integral parts of the community's fabric, that is, its character and function, so their continuing existence promotes the City's policy objective of protecting its neighborhoods. In these instances, the classification "nonconformity" and resulting restriction on investment may not be what the community desires. As such, the use may be made conforming pursuant to this Division in order to remove the stigma associated with the "nonconforming" designation.

### Sec. 13.402 Procedure

- A. **Generally.** An owner of a major or minor nonconforming use, building, or structure may apply for a Special Use permit which has the effect of making the nonconforming use, building, structure, or sign conforming. The criteria for Special Use approval are set out in **Section 13.403**, **Criteria for Approval**.
- B. **Exclusions.** This procedure does not apply to nonconforming lots, which may be buildable in accordance with the standards of **Section 13.305**, **Construction on Nonconforming Lots**.

# Sec. 13.403 Criteria for Approval

- A. **Generally.** A Special Use approval may be granted to make a nonconforming building, structure, use, or sign conforming, if, in addition to the criteria for approval of a Special Use set forth in **Section 15.706**, **Special Uses**, all of the criteria of this Section are satisfied.
- B. **Minimal Nonconformity.** The use, as conducted and managed, has minimal nonconformities and has been integrated into the neighborhood's function. Evaluation criteria include:
  - 1. The neighborhood residents regularly patronize or are employed at said use (for non-residential uses).
  - 2. Management practices eliminate nuisances such as noise, light, waste materials, unreasonably congested on-street parking, or similar conflicts.
  - 3. A history of complaints is justification for denying the Special Use permit, unless the conditions of the permit will eliminate the identified nuisances.
  - 4. The use has been maintained in good condition or its classification as a nonconformity represents a disincentive for such maintenance.
- C. **Conditions.** Conditions may be imposed relative to the expansion of bufferyards, landscaping, or other site design provisions, or other limitations necessary to ensure that, as a conforming use, the use will not become a nuisance. Such conditions may relate to the lot, buildings, structures, or operation of the use.

### Sec. 13.404 Effect and Annotation

- A. **Effect.** Granting a Special Use permit pursuant to this Division makes the use, building, or structure conform to the specifics of the Special Use approval, thereby making the use, building, or structure conform to this UDO (eliminating the nonconformity).
- B. **Written Approval.** Special use approvals shall be provided to the applicant in writing and may be recorded by the applicant at the applicant's expense.
- C. **Annotation of Official Zoning Map.** Upon granting a Special Use permit and the applicant's demonstration of compliance with any conditions placed upon it, the Planning Director shall place an annotation on the Official Zoning Map, stating that the property has a special use permit, as well as the application case number and date of approval.

# PETITION TO VALPARAISO PLAN COMMISSION

Receipt #61968	100
\$ 150.00 1200	pies
1#7224 4-5-24	-

This application is being submitted for (Check all that apply)	
PUBLIC HEARING REQUIRED:	NO PUBLIC HEARING REQUIRED:
<ul> <li>□ To Rezone a Property from to</li> <li>□ To Approve a Primary Plat</li> <li>□ To Approve a Planned Unit Development (PUD)</li> <li>□ To Approve a Major Planned Unit Development (PUD) Amendment</li> </ul>	<ul> <li>▼ To Approve a Minor Subdivision (Lot Split)</li> <li>□ To Approve a Final Plat</li> <li>□ To Approve a Plat Amendment/Replat</li> <li>□ Design/Architectural Approval in</li> <li> Overlay District</li> </ul>
<ul> <li>To Annex Property into the City of Valparaiso,</li> <li>IN</li> </ul>	For Office Use Only:
☐ To Vacate Alley	Petition #:
☐ To Appeal the Decision of the Plat Committee	Application Filing Fee:
	Meeting: / /

☐ To Vacate Alley ☐ To Appeal the Decision of the Plat Committee	Petition #:           Application Filing Fee:           Date Filed:         //           Meeting:        //
SUBJECT PROPERTY INFORMATION	TYPE OR PRINT IN INK
Property Address: 201/203 Campbell St (Units 1:2) (fka 452 Chicago St)	Subject Property fronts on the <u>north</u> side between (streets) <u>Chicago St</u> and Chestnut St
Description of Location of Property: The northwest corner of Chicago St and Campbell St.	Zoning District (Current): UR - (newly rezoned)  Zoning District (Proposed): UR  Zoning of Adjacent Properties:
	North: NC-60 South:
Parcel/Tax Duplicate Number(s): 64-09-23-429-011.000-004	Present Use of Property:  Vacant land
Subdivision (If Applicable):	
CAMPBELL STREET  DUNHOMES  Dimensions of Property: Front: 159.01 Depth: 119.80	Proposed Use of Property: 4-lot minor subdivision $W/2$ -twin townhomes, each with 2253 SF, two-storey, two-
Property Area (sq. ft./acres): #1 acres	car garages.

' ',			
PETITIONER INFORMATION			
Applicant Name: MTF Development, UG	Address:	1151 US Hwy 30 Valparaiso, IN 46383	
		Vallaraiso, IN 46383	
Phone: 219-464-3736		(000)	
Email: mifrentals@yahor.com			
Email: mjfrentals@yahor.com KKaminski@coolmanbuilt.com			
PROPERTY OWNER INFORMATION			
Applicant Name:	Address:		
as above		as above	
Phone:			
Email:			
LEGAL DESCRIPTION OF SUBJECT PROPERTY: (EXHIBIT NO.	<u>A</u> )		*****
	,		
PROPOSED VARIANCES OR WAIVERS: (EXHIBIT NO)			

# Affidavit of Consent of Property Owner

(To be presented with application for Plan Commission)

MARK J. FORSZI, being dull states:	sworn upon his/her oath, being of sound mind and legal age depos	es and
1. That MARK J FOR subject of a Petition before the	521 ("Owner") (is/are) the legal owner(s) of real property that e Plan Commission.	t is the
the Petition filed before the Plan	MAN BULL AFRS K.M.Kaminsky "Petitioner") to seek the relief sou Commission. Petitioner is further authorized to commit to any reason Commission or proposed by the Petitioner.	ıght in onable
Mark J Forset	405-2024	
Property Owner	Date	
M	4-05-2024	
Property Owner	Date	
Subscribed and sworn to before me t	15th day of April , 20 24.	
Notary Public  My Commission Expires:	JULIE A KACZMARSKI Notary Public - Seal Porter County - State of Indiana Commission Number NP0663960 My Commission Expires Feb 11, 2031	
<u> </u>		

ALL OWNERS OF RECORD OF THE ABOVE-REFERENCED PROPERTY MUST SIGN THE PETITION FOR PUBLIC HEARING. The owner(s), by signing this Petition for Public Hearing, represent to the City of Valparaiso — Plan Commission, that he/she/it has the necessary legal authority to request action to be taken on the above-referenced property. If the name of the Petitioner is different from the property owner, the Plan Commission shall accept the requests and representations of the Petitioner and the property owner shall be bound by such requests and representations via the Attached Affidavit of Consent of Property Owner.

1 MM	4.05-2024
Signature of owner/Petitioner	Date
Mark J Forszt	
Printed name	
MATATA PIDUC A -	JULIE A KACZMARSKI Notary Public - Seal rter County - State of Indiana mmission Number NP0663960 ommission Expires Feb 11, 2031
My Commission Expires: 0 と 11 - 903	

# **Affidavit of Consent of Property Owner**

(To be presented with application for Plan Commission)

MARK J. FORSZT , being dully swor	n upon his/her oath, being of sound mind and legal age deposes and
states:	
1. That MJF Development, Lu subject of a Petition before the Plan	("Owner") (is/are) the legal owner(s) of real property that is the Commission.
	ission or proposed by the Petitioner. to seek the relief sought in
MARK J. FORSZT	4-3-24.
Property Owner - PRINT	Date
m	4-3-24
Property Owner - SIGNED .	Date
Subscribed and sworn to before me this <u>4</u> Mula (surmands) Notary Public	day of March, 2024.

My Commission Expires:

# Primary Plat of Campbell Street Townhomes


Property Address

452 Chicago Street, Valparaiso, Indiana 46385



# Parent Parcel Legal Description (per Chicago Title Insurance Company, Commitment Number CTNW1806405 Revision 1, Commitment Dated July 20, 2018

PART OF THE NORTHEAST QUARTER OF THE SOUTHEAST QUARTER OF SECTION 23, TOWNSHIP 35 NORTH, RANGE 6 WEST OF THE SECOND PRINCIPAL MERIDIAN, IN THE CITY OF VALPARAISO, PORTER COUNTY, INDIANA, ALSO BEING PART OF BLOCK 83 IN COUNCIL'S ADDITION OF 1883 TO THE TOWN, NOW CITY, OF VALPARAISO, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS: COMMENCING AT THE SOUTHWEST CORNER OF LOT 20 IN THE ADDITION OF OUTLOTS TO THE TOWN, NOW CITY, OF VALPARAISO; THENCE SOUTH 89 DEGREES 32 MINUTES 11 SECONDS WEST ALONG THE NORTH RIGHT OF WAY LINE OF 60 FOOT WIDE CHICAGO STREET, 146.25 FEET TO THE SOUTHEAST CORNER OF A PARCEL OF LAND DESCRIBED IN A WARRANTY DEED RECORDED AUGUST 30, 2016 AS INSTRUMENT NUMBER 2016—021418; THENCE NORTH 00 DEGREES 09 MINUTES 20 SECONDS W ALONG THE EAST LINE OF SAID INSTRUMENT NUMBER 2016—021418, 6.00 FEET TO A 1" PINCHED TOP IRON PIPE, SAID POINT ALSO BEING THE POINT OF BEGINNING OF THIS DESCRIPTION; THENCE CONTINUING NORTH 00 DEGREES 09 MINUTES 20 SECONDS WEST ALONG SAID EAST LINE, 159.00 FEET TO A 1" PINCHED TOP IRON PIPE FOUND AT THE SOUTH RIGHT OF WAY LINE OF A 14 FOOT WIDE PUBLIC ALLEY AS SHOWN IN SAID BLOCK 83; THENCE NORTH 89 DEGREES 32 MINUTES 11 SECONDS EAST ALONG SAID SOUTH RIGHT OF WAY LINE, 120.66 FEET TO THE WEST RIGHT OF WAY LINE OF CAMPBELL STREET; THENCE SOUTH 00 DEGREES 09 MINUTES 20 SECONDS WEST ALONG SAID WEST RIGHT OF WAY LINE, 159.00 FEET TO A POINT 6.00 FEET NORTH OF THE NORTH RIGHT OF WAY LINE OF 60 FOOT WIDE CHICAGO STREET; THENCE SOUTH 89 DEGREES 32 MINUTES THE 11 SECONDS WEST PARALLEL WITH AND 6.00 FEET NORTH OF SAID NORTH RIGHT OF WAY LINE, 121.25 FEET TO THE POINT OF BEGINNING.

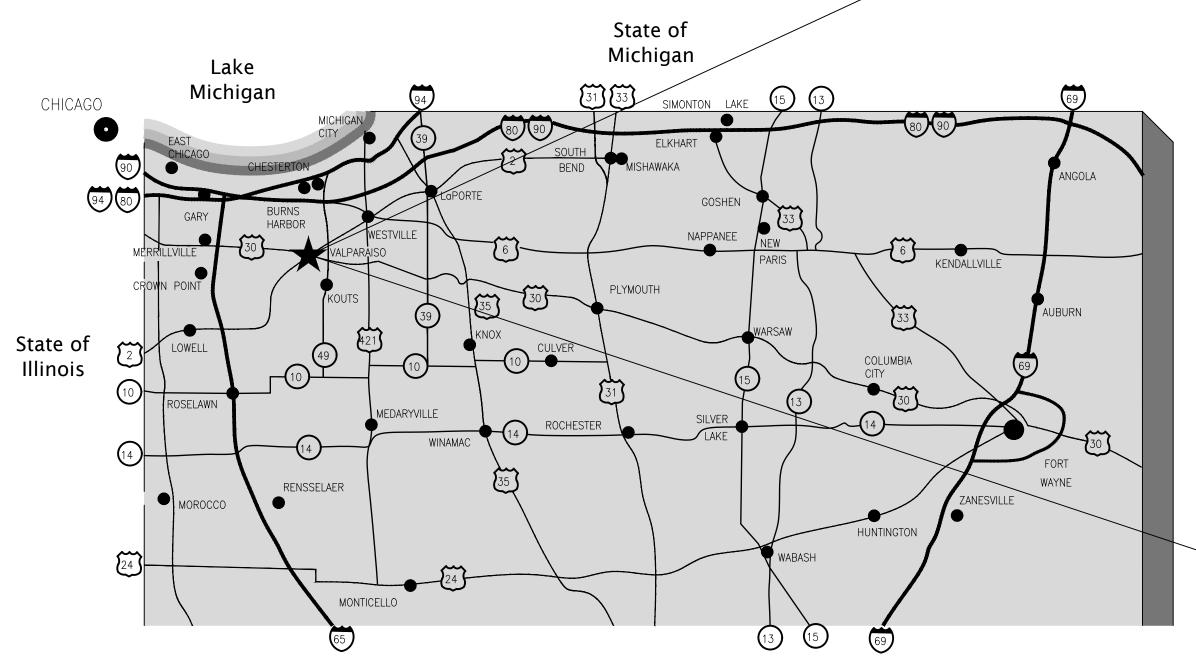



City of Valparaiso, Center Township, Porter County, Indiana



Sheet No.

C00
Title Sheet

C1.0
Existing Site and Demolition Plan

C2.0
Primary Plat and Building Site Plan

C3.0
Proposed Site Utility Plan

C4.0
Proposed Driainage and Grading Plan

C5.0
Proposed Erosion and Sediment Control Plan


C6.0
General Site Details and Specifications

C6.1
General Site Details and Specifications

C6.2
General Site Details and Specifications

Sheet Index





# **Engineer / Surveyor**


McMahon Associates, Inc. 952 South State Road 2 Valparaiso, Indiana 46385 mcm@mcmgrp-in.com Tel: (219) 462-7743

# Owner / Developer

Coolman Communities c/o Ms. Kelly Kaminski 359 S. Franklin Street Valparaiso, Indiana 46383 kkaminski@coolmanbuilt.com Tel: (219) 464-8055 REVISION #1: MAY
PROJECT NUMBER: C5017-05-23-00103.04 SUBMIT DATE: APF

# MCMAHON ENGINEERS ARCHITECTS

952 South State Road 2 Valparaiso, Indiana 46385 Tel: (219) 462-7743 Fax: (219) 464-8248 mcm@mcmgrp-in.com

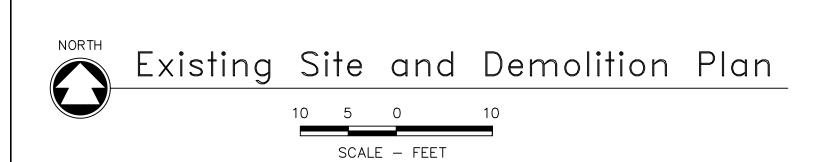

# **Existing Site and Demolition Notes**

- 1. Property boundary shown per McMAHON Associates, Inc, dated April 13, 2023, Project No.: C5017-05-23-00103, by Kevin Coros.
- 2. Site topography per manual field work January of 2023, datum per NAVD88.
- 3. The utilities shown in plan are indicated in accordance with available records and Indiana 811 Underground, Ticket No. 2304102635. The contractor shall be responsible for obtaining exact locations and elevations of all utilities, including any private utilities, from the owners of the respective utilities. All utilities shall be notified 72 hours prior to excavation.
- 4. Flood Hazard Statement: The accuracy of any flood hazard data shown on this report is subject to map scale uncertainty and to any other uncertainty in location or elevation on the referenced Flood Insurance Rate Map. All of the within described land appears to lie within special flood hazard zone 'X' as said tract plots by scale on community—panel #18089C0202D of the flood insurance rate maps for City of Valparaiso (maps dated September 30, 2015).
- 5. No wetlands exist on property per U.S. Fish & Wildlife Service National Wetland Inventory Map.
- 6. Entire site soil consists of Urban Land Morley Complex, 2%-6% slopes (UmB).
- 7. Property is zoned Urban Residential (UR) per City of Valparaiso City Council on October 23, 2023 (Ordinance No.: 34, 2034) Building Standards per Table 3.503 — Single—Family Attached Lot and Building Standards

Lot Area per Unit:

Lot Width per Unit:

Street Yard:

Building Separation:

Rear Yard:

Height (max):

Building Coverage (max):

Lot Width per Unit:

25 feet

10 feet

22 feet

22 feet

24 feet

25 feet

26 feet

27 feet

28 feet

28 feet

28 feet

29 feet

20 feet

20 feet

20 feet

21 feet

22 feet

23 feet

34 feet

45 feet

46 feet

47 feet

48 feet

49 feet

40 fe

8. Existing Property Area Information: Site Area (before dedication):

Green Area:


Site Area (before dedication): Site Area Dedication: Site Area (after dedication): Impervious Area: 19,116.01 sq.ft. (0.44 Acres) 795.03 sq.ft. (0.02 Acres) 18,320.98 sq.ft. (0.42 Acres) 1,515± sq.ft. (8.5%±) 16,329± sq.ft. (91.5%±)


Existing Site Legend		
Asphalt		
Building	<del>,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,</del>	
Concrete	· · · · · · · · · · · · · · · · · · ·	
Drainage — Inlet	<b>=</b>	
Gravel		
Manhole (General)	M	
Manhole (Sanitary)	SA	
Over—Head Utilities	— OHU —	
Power Pole	D-	
Sanitary Line	— SAN —	
Sign	þ	
Storm Line	— STM —	
Street Name Sign	4	
Truncated Dome		

Water Line



STATE OF

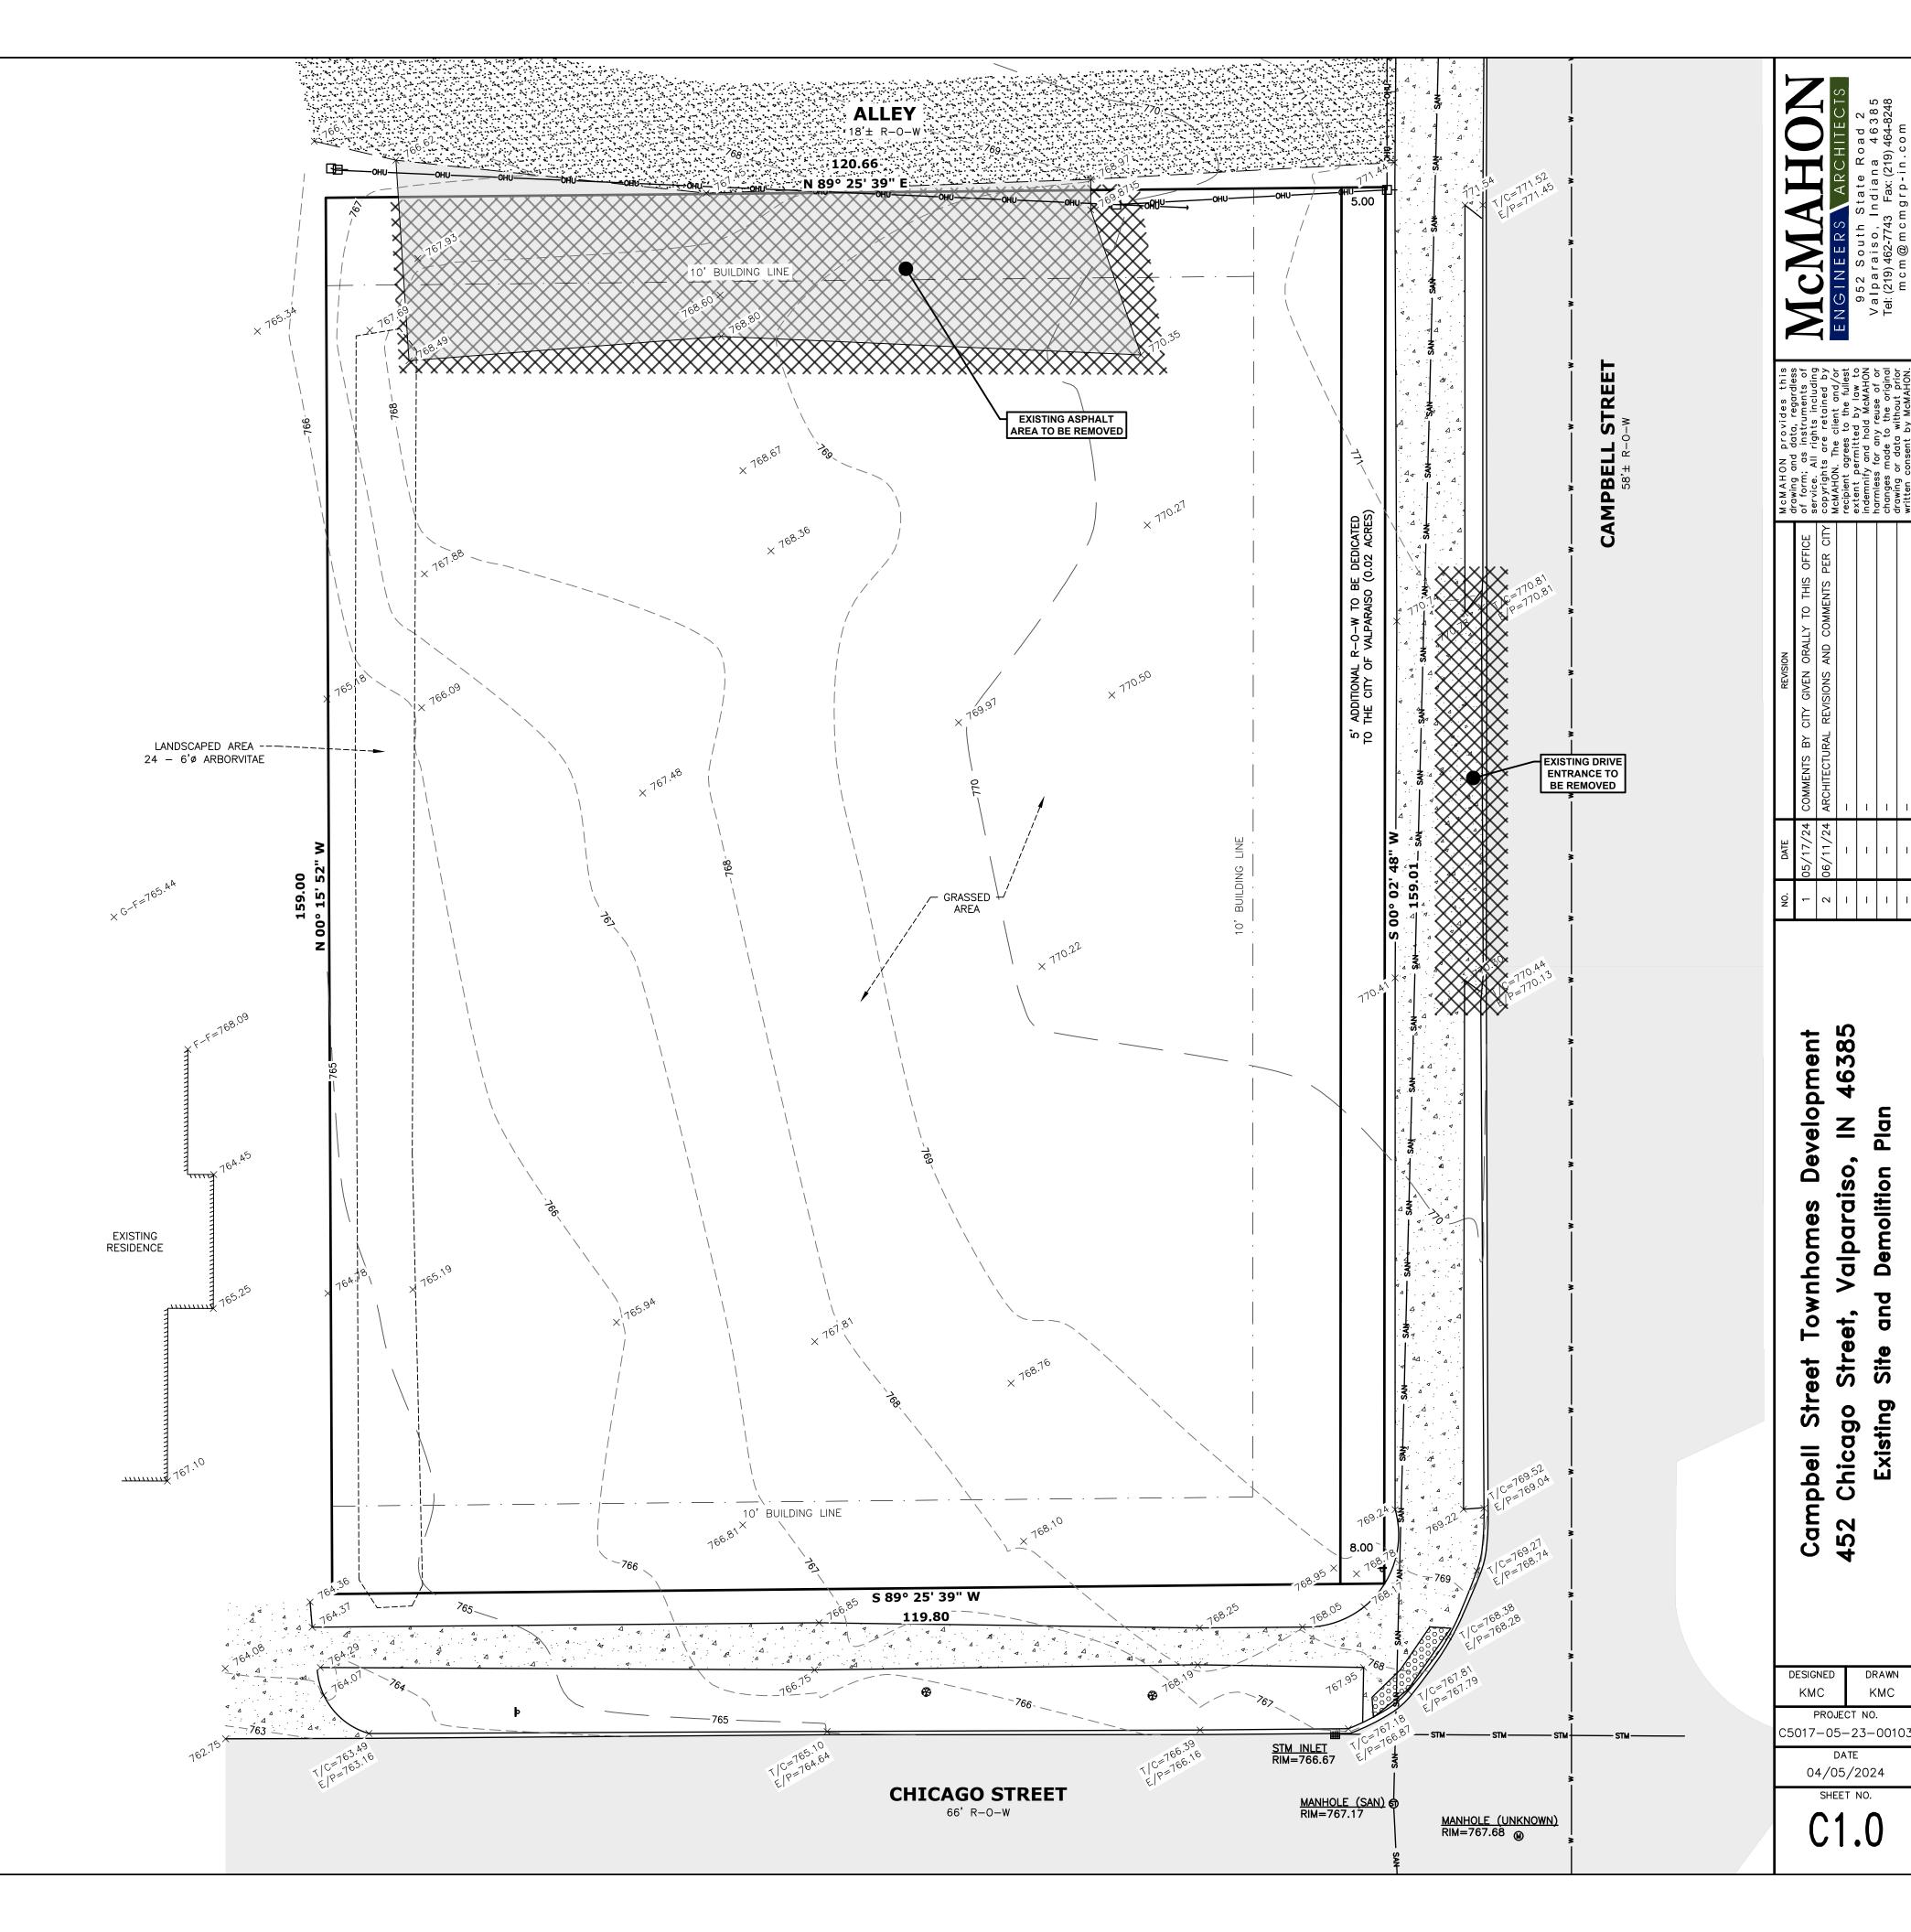

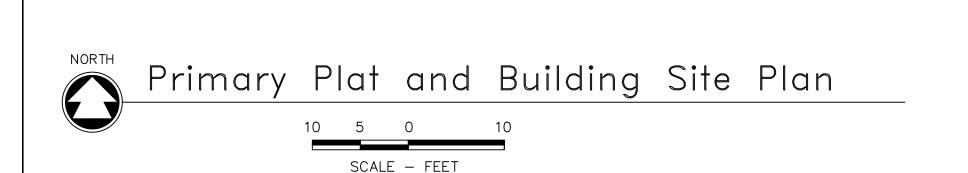

# Proposed Building Notes

1. Proposed Property Area Information:

Site Area (before dedication): 19,116.01 sq.ft. (0.44 Acres)
Site Area Dedication: 795.03 sq.ft. (0.02 Acres)
Site Area (after dedication): 18,320.98 sq.ft. (0.42 Acres)
Impervious Area: 11,532± sq.ft. (62.9%±)
Building Coverage: 6,367± sq.ft. (34.8%±)
Green Area: 6,789± sq.ft. (37.1%±)

2. Bufferyard Area Information (per Article 10, Division 10.400):

Property constitutes a "Constrained Sites and Infill/Redevelopement Sites" per City of Valparaiso Planning Director (Sec. 10.407)
Reduced bufferyard requirements > 15% site being used for bufferyards:

Class A Bufferyard on north and south sides (10 ft. width)
Class B Bufferyard on east and west sides (15 ft. width)

Total Bufferyard Area = 6,414.64 sq.ft. Total Bufferyard Area (6,414.64 sq.ft.) / Site Area (17,843.95 sq.ft.) = 35.9% > 15%

Site receives reduced bufferyard benefit Class A Bufferyard on north and south sides = 4 ft. width

Class B Bufferyard on east side = 5 ft. width

Class B Bufferyard on west side = 8 ft. width

Reduced Bufferyard Area (2,885 $\pm$  sq.ft.) / Site Area (18,320.98 sq.ft.) = 15.8% $\pm$  > 15%

3. Property is zoned Urban Residential (UR) per City of Valparaiso City Council on October 23, 2023 (Ordinance No.: 34, 2034)
Building Standards per Table 3.503 — Single—Family Attached Lot and Building Standards

Lot Area per Unit: 2,500 sq.ft.

Lot Width per Unit: 25 feet

Street Yard: 10 feet

Building Separation: 12 feet

Building Separation: 12 feet
Rear Yard: 20 feet
Height (max): 28 feet
Building Coverage (max): 0.65
Lot Coverage (max): 0.70

4. Each unit will have their own individual roll—out bins from the City of Valparaiso.

5. See landscape plans provided by others for landscape requirements.

6. All work shall be performed in accordance with all local, state and federal codes.


7. The contractor shall obtain all necessary permits for construction.

8. Timely notification of necessary governmental agencies regarding the commencement of construction activity is required.

9. All work performed on the site shall conform to the site construction plans and specifications. Public improvements (including areas within right—of—way) shall conform to City of Valparaiso Standards.


10. The contractor shall be responsible for maintaining safe traffic control on the site and adjacent public streets, as related to both physical site improvements and the movement of construction traffic.


11. All necessary inspections and certifications, as required by ordinance, code, utility companies or government agencies shall be completed before the final connection of services.

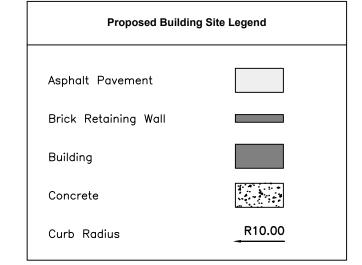





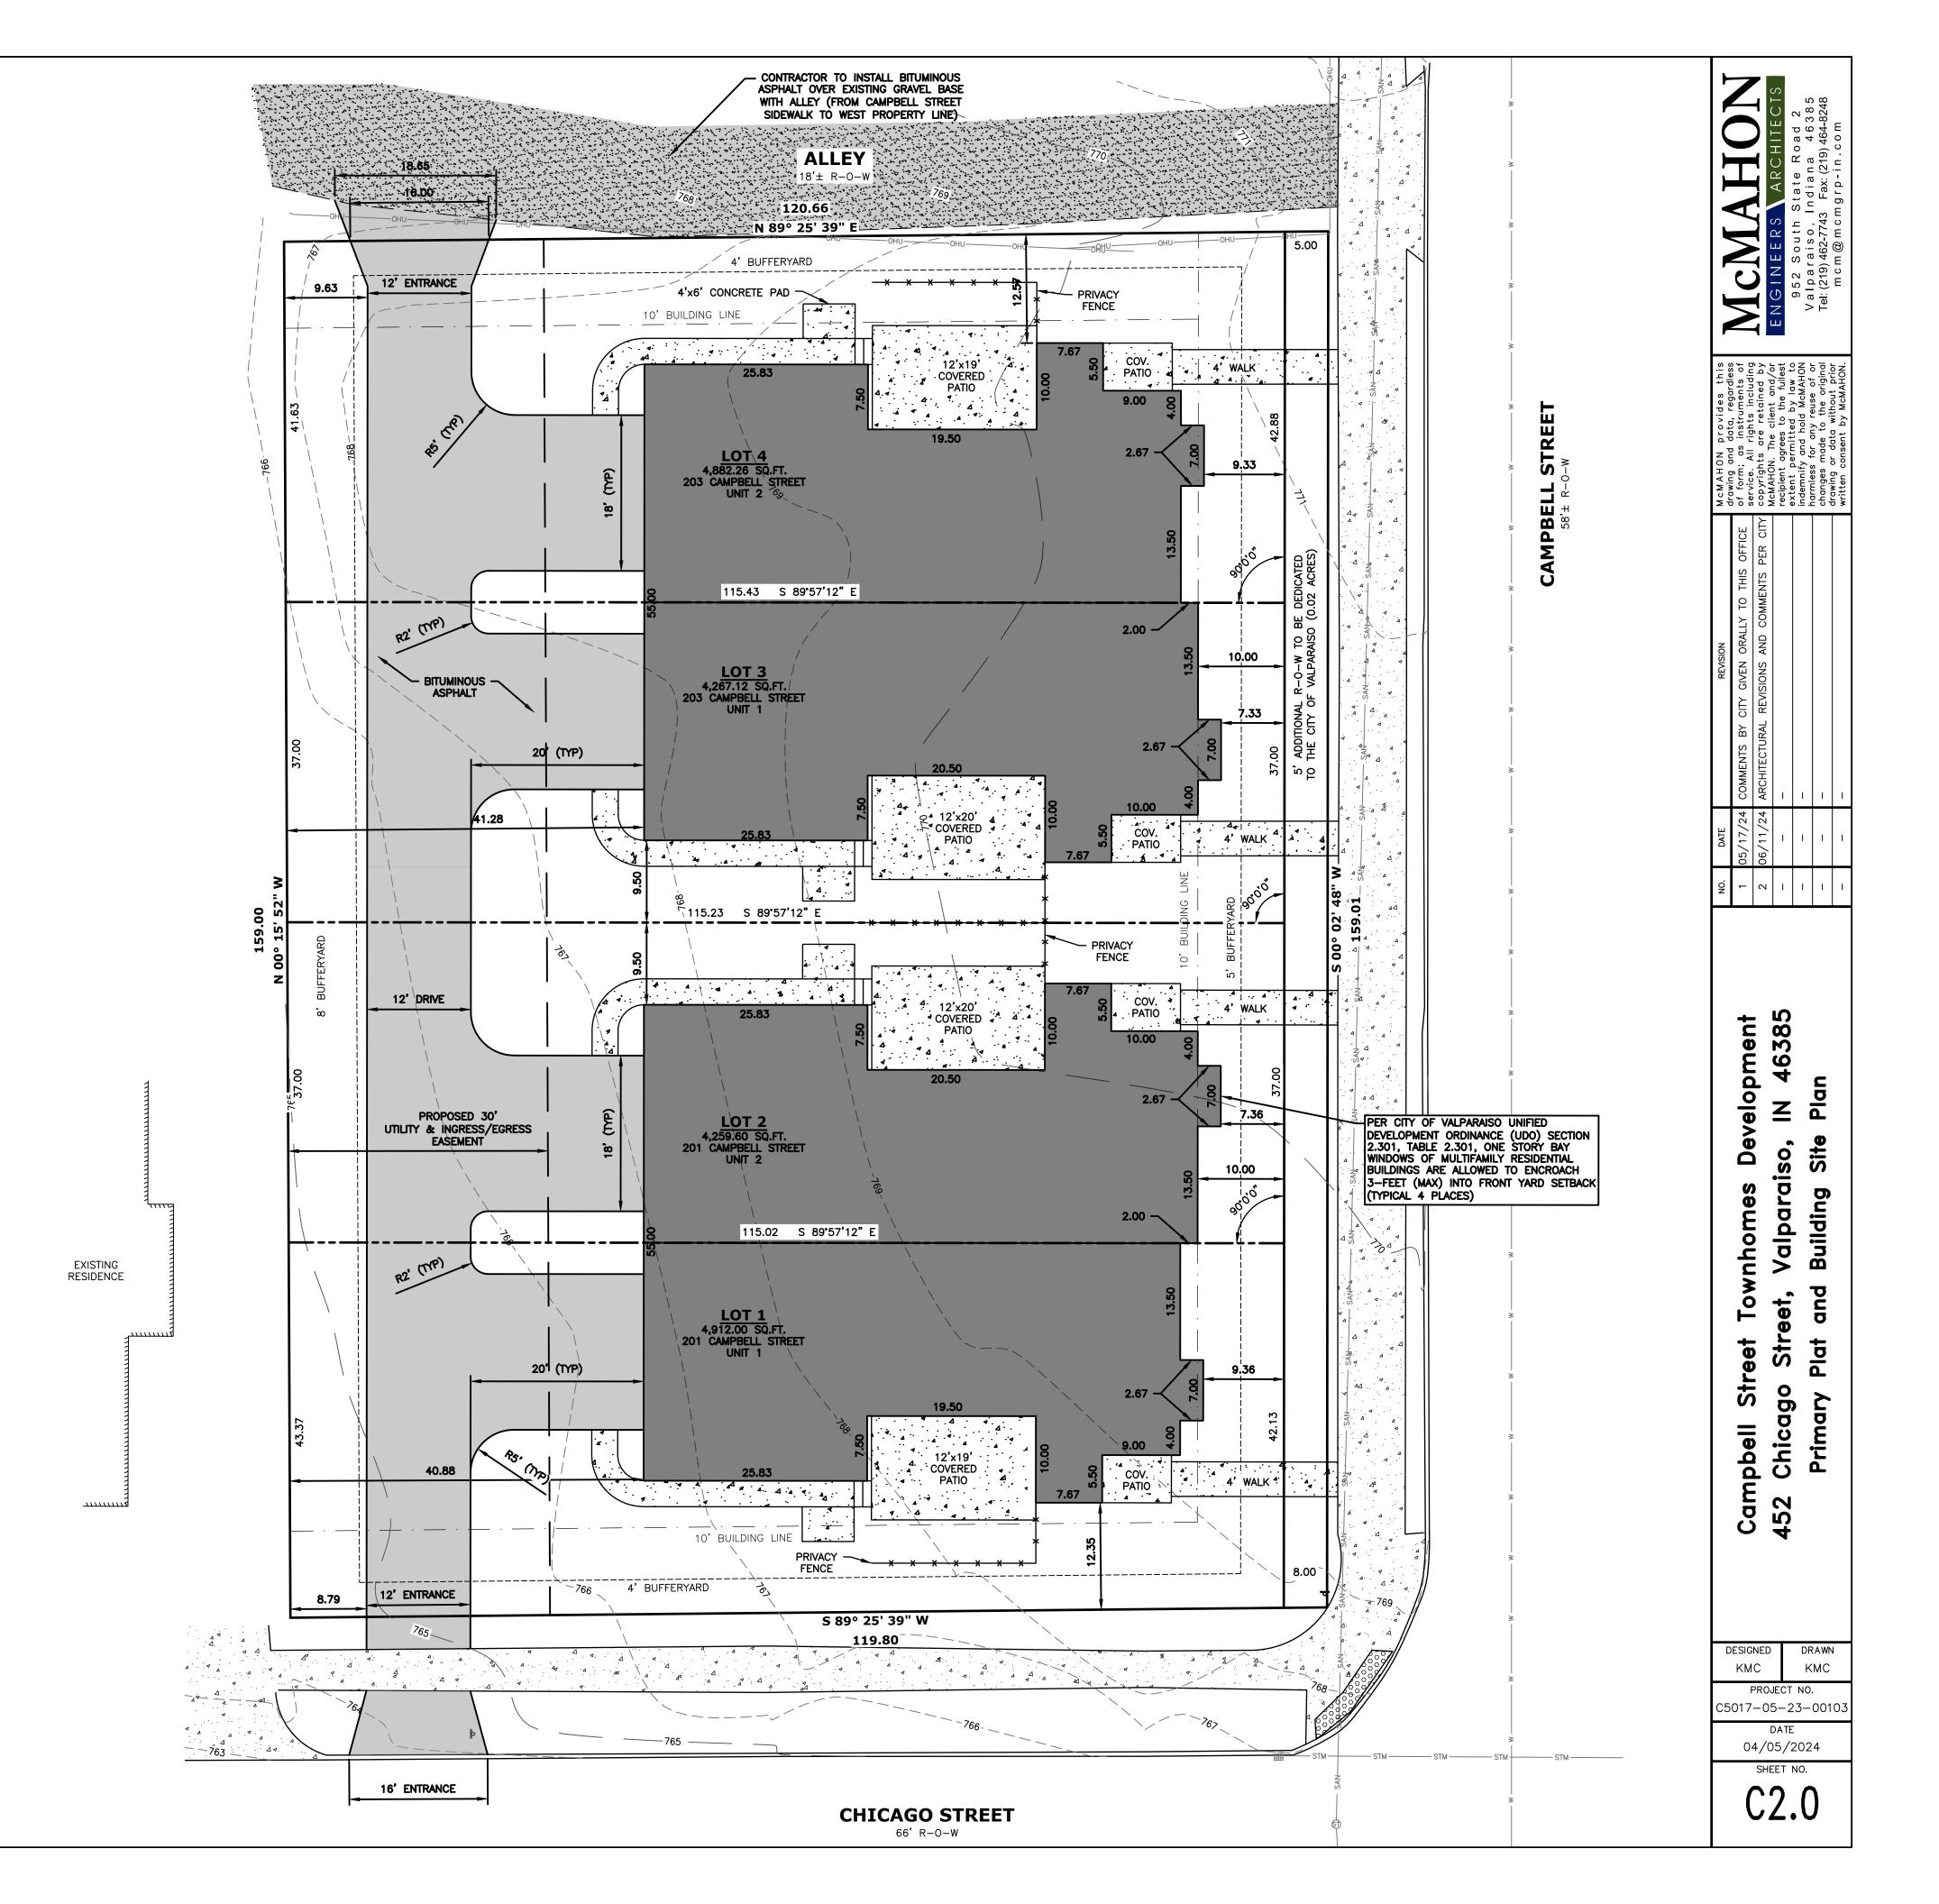

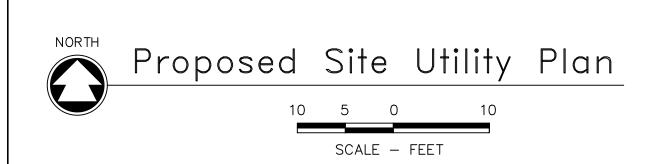


# Proposed Utility Notes


- The utilities shown in plan are indicated in accordance with available records and Indiana 811 Underground, Ticket No. 2304102635. The contractor shall be responsible for obtaining exact locations and elevations of all utilities, including any private utilities, from the owners of the respective utilities. All utilities shall be notified 72 hours prior to excavation.
- 2. All work shall be performed in accordance with all local, state and federal codes.
- 3. The contractor shall obtain all necessary permits for construction.
- 4. Timely notification of necessary governmental agencies regarding the commencement of construction activity is required.
- 5. All work performed on the site shall conform to the site construction plans and specifications. Public improvements (including areas within right—of—way) shall conform to City of Valparaiso Standards.
- 6. The contractor shall be responsible for maintaining safe traffic control on the site and adjacent public streets, as related to both physical site improvements and the movement of construction traffic.
- 7. All necessary inspections and certifications, as required by ordinance, code, utility companies or government agencies shall be completed before the final connection of services.

Proposed Utility Legend		
Curb Stop	Ocs	
Sanitary Pipe		
Water Main	<del></del>	
Water Meter	<b>w</b>	

Keni Ceso



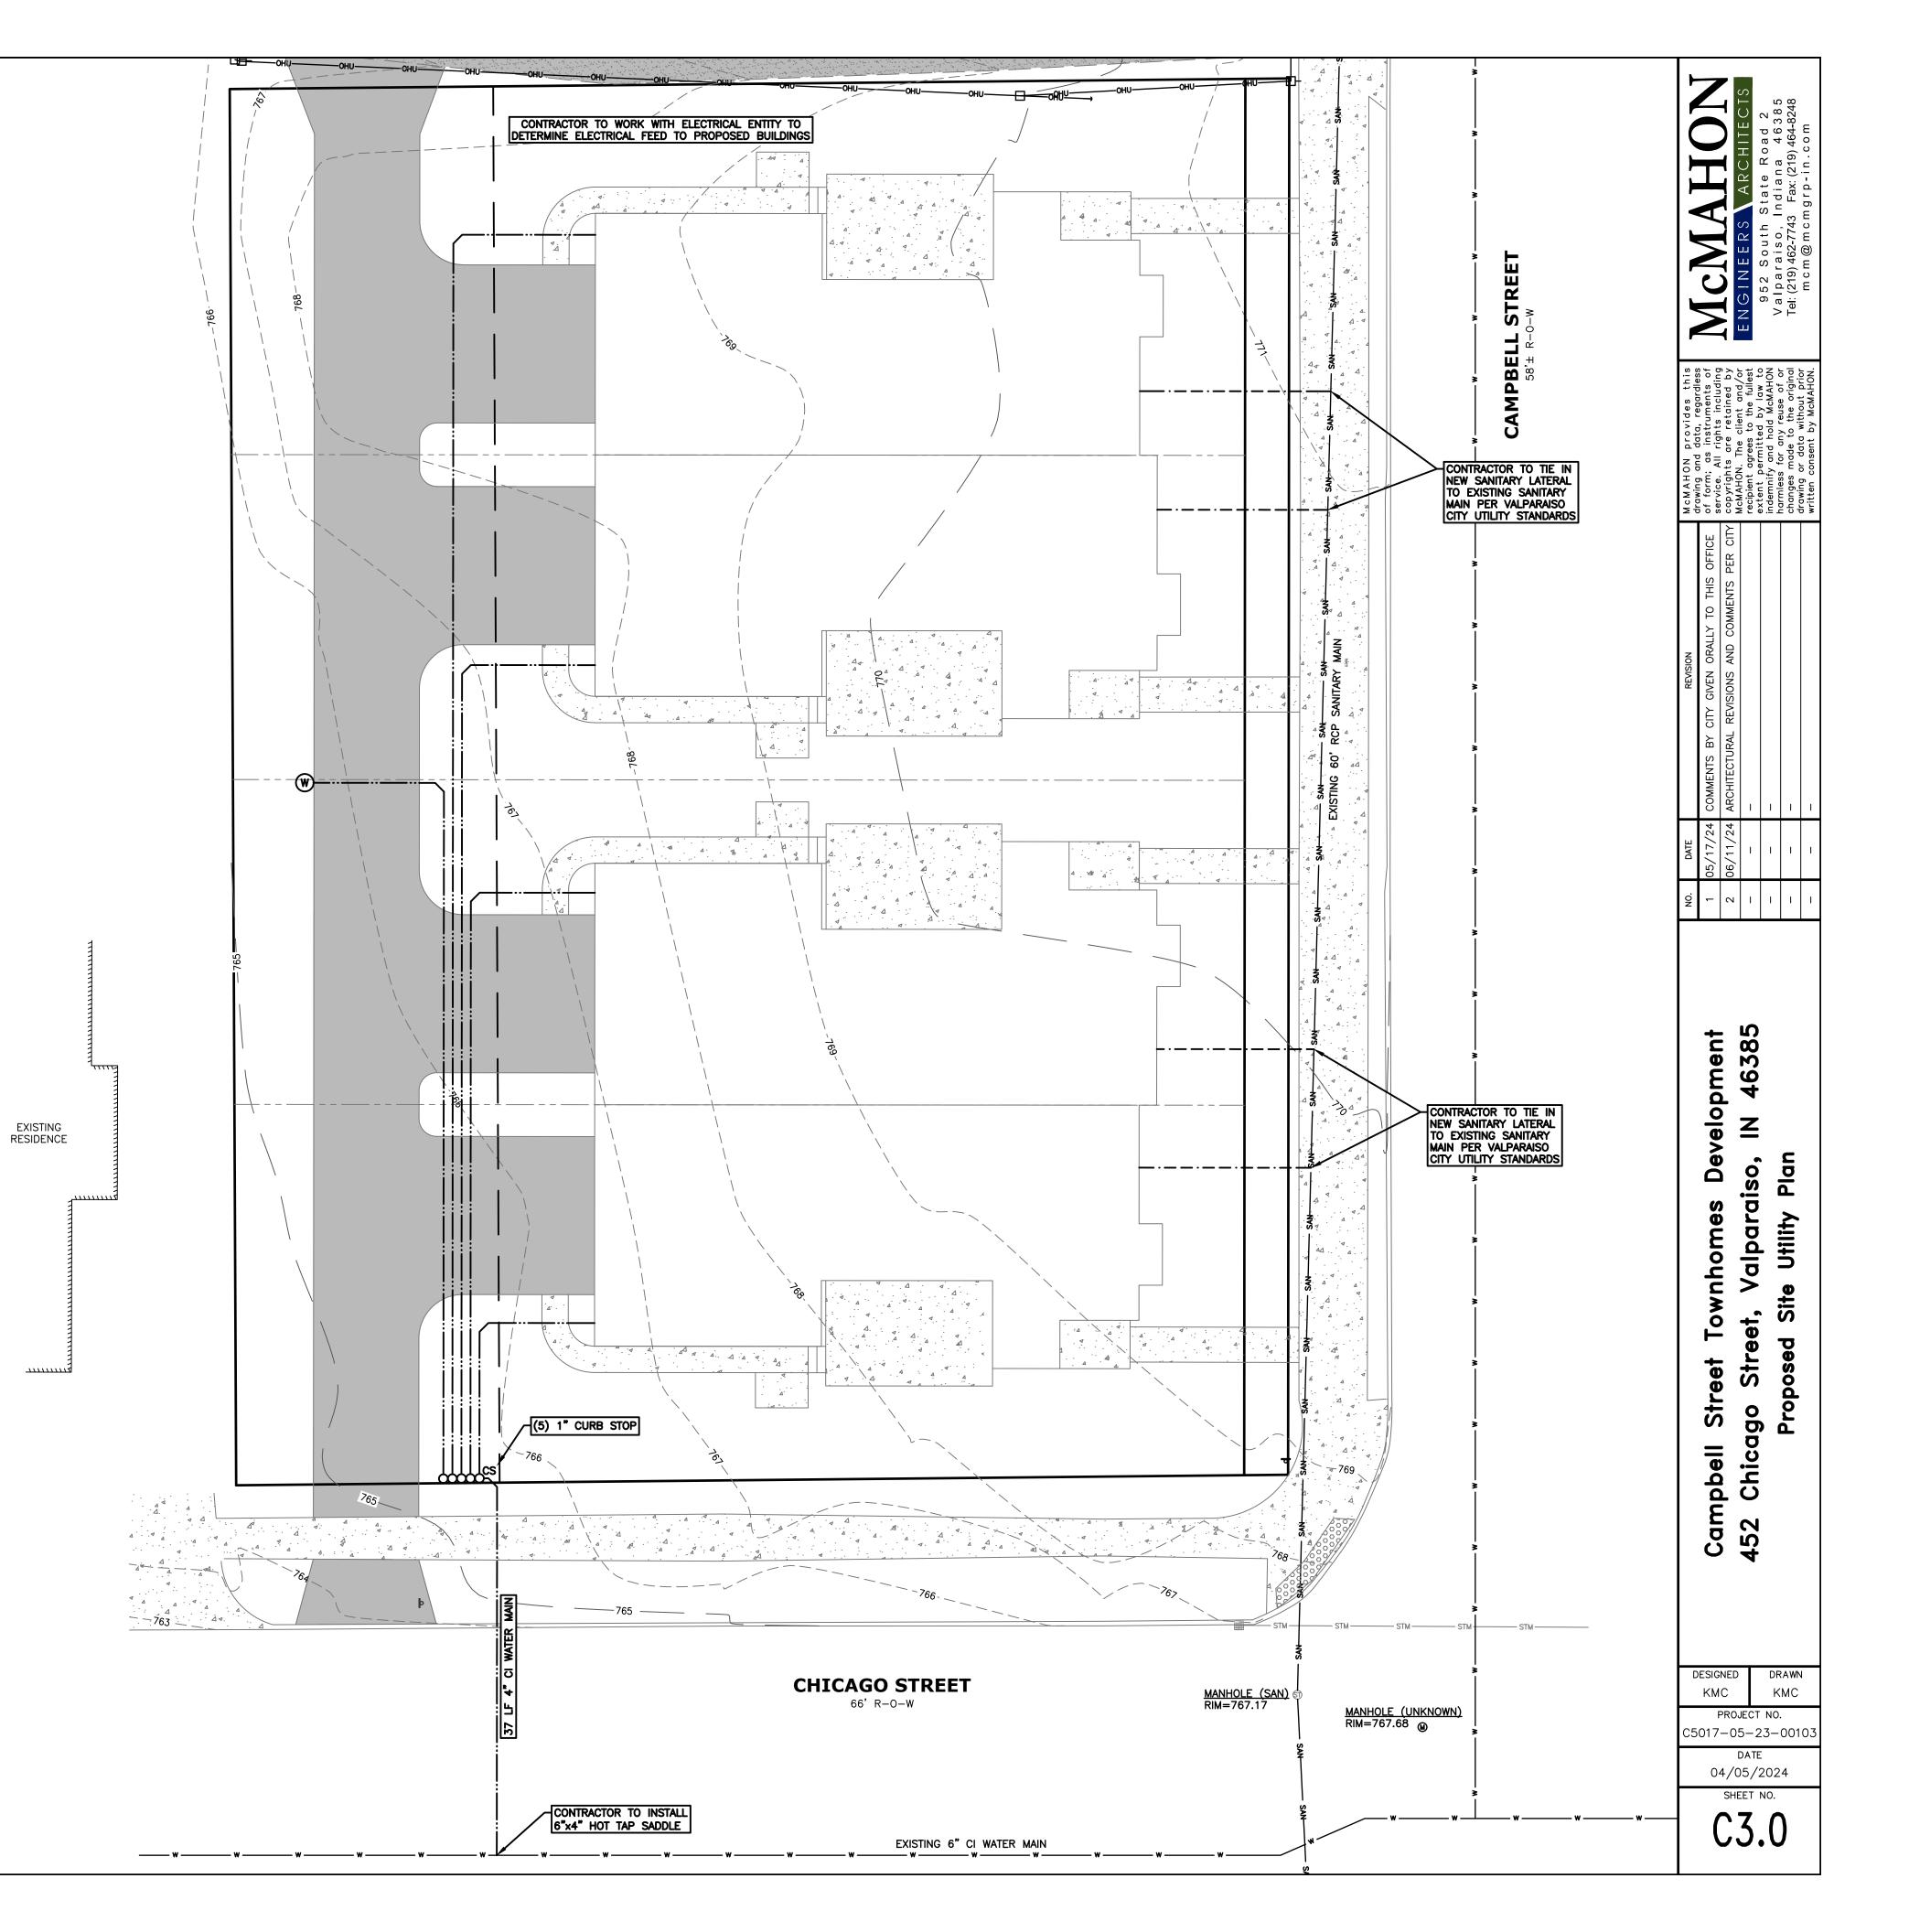

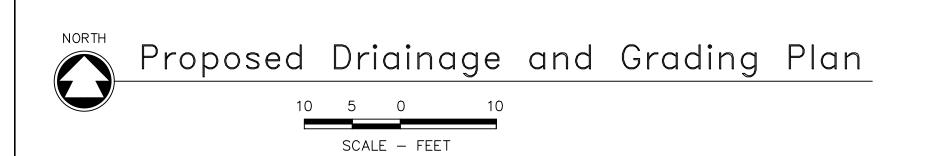

# **Proposed Utility Notes**


1. Proposed Property Area Information:


Site Area (before dedication): 19,116.01 sq.ft. (0.44 Acres)
Site Area Dedication: 1,272.06 sq.ft. (0.03 Acres)
Site Area (after dedication): 17,843.95 sq.ft. (0.41 Acres)
Impervious Area: 12,445± sq.ft. (69.7%±)
Building Coverage: 7,386± sq.ft. (41.4%±)
Green Area: 5,693± sq.ft. (31.9%±)

- 2. Site topography per manual field work January of 2023, datum per NAVD88.
- 3. The utilities shown in plan are indicated in accordance with available records and Indiana 811 Underground, Ticket No. 2304102635. The contractor shall be responsible for obtaining exact locations and elevations of all utilities, including any private utilities, from the owners of the respective utilities. All utilities shall be notified 72 hours prior to excavation.
- 4. Flood Hazard Statement: The accuracy of any flood hazard data shown on this report is subject to map scale uncertainty and to any other uncertainty in location or elevation on the referenced Flood Insurance Rate Map. All of the within described land appears to lie within special flood hazard zone 'X' as said tract plots by scale on community—panel #18089C0202D of the flood insurance rate maps for City of Valparaiso (maps dated September 30, 2015).
- 5. No wetlands exist on property per U.S. Fish & Wildlife Service National Wetland Inventory Map.
- 6. All work shall be performed in accordance with all local, state and federal codes.
- 7. The contractor shall obtain all necessary permits for construction.
- 8. Timely notification of necessary governmental agencies regarding the commencement of construction activity is required.
- 9. All work performed on the site shall conform to the site construction plans and specifications. Public improvements (including areas within right—of—way) shall conform to City of Valparaiso Standards.
- 10. The contractor shall be responsible for maintaining safe traffic control on the site and adjacent public streets, as related to both physical site improvements and the movement of construction traffic.
- 11. All necessary inspections and certifications, as required by ordinance, code, utility companies or government agencies shall be completed before the final connection of services.

Proposed Site Drainage Legend		
<del>-1</del>		
100.0		
(100.0)		
M.E.		
100.0		

Keni Ceso




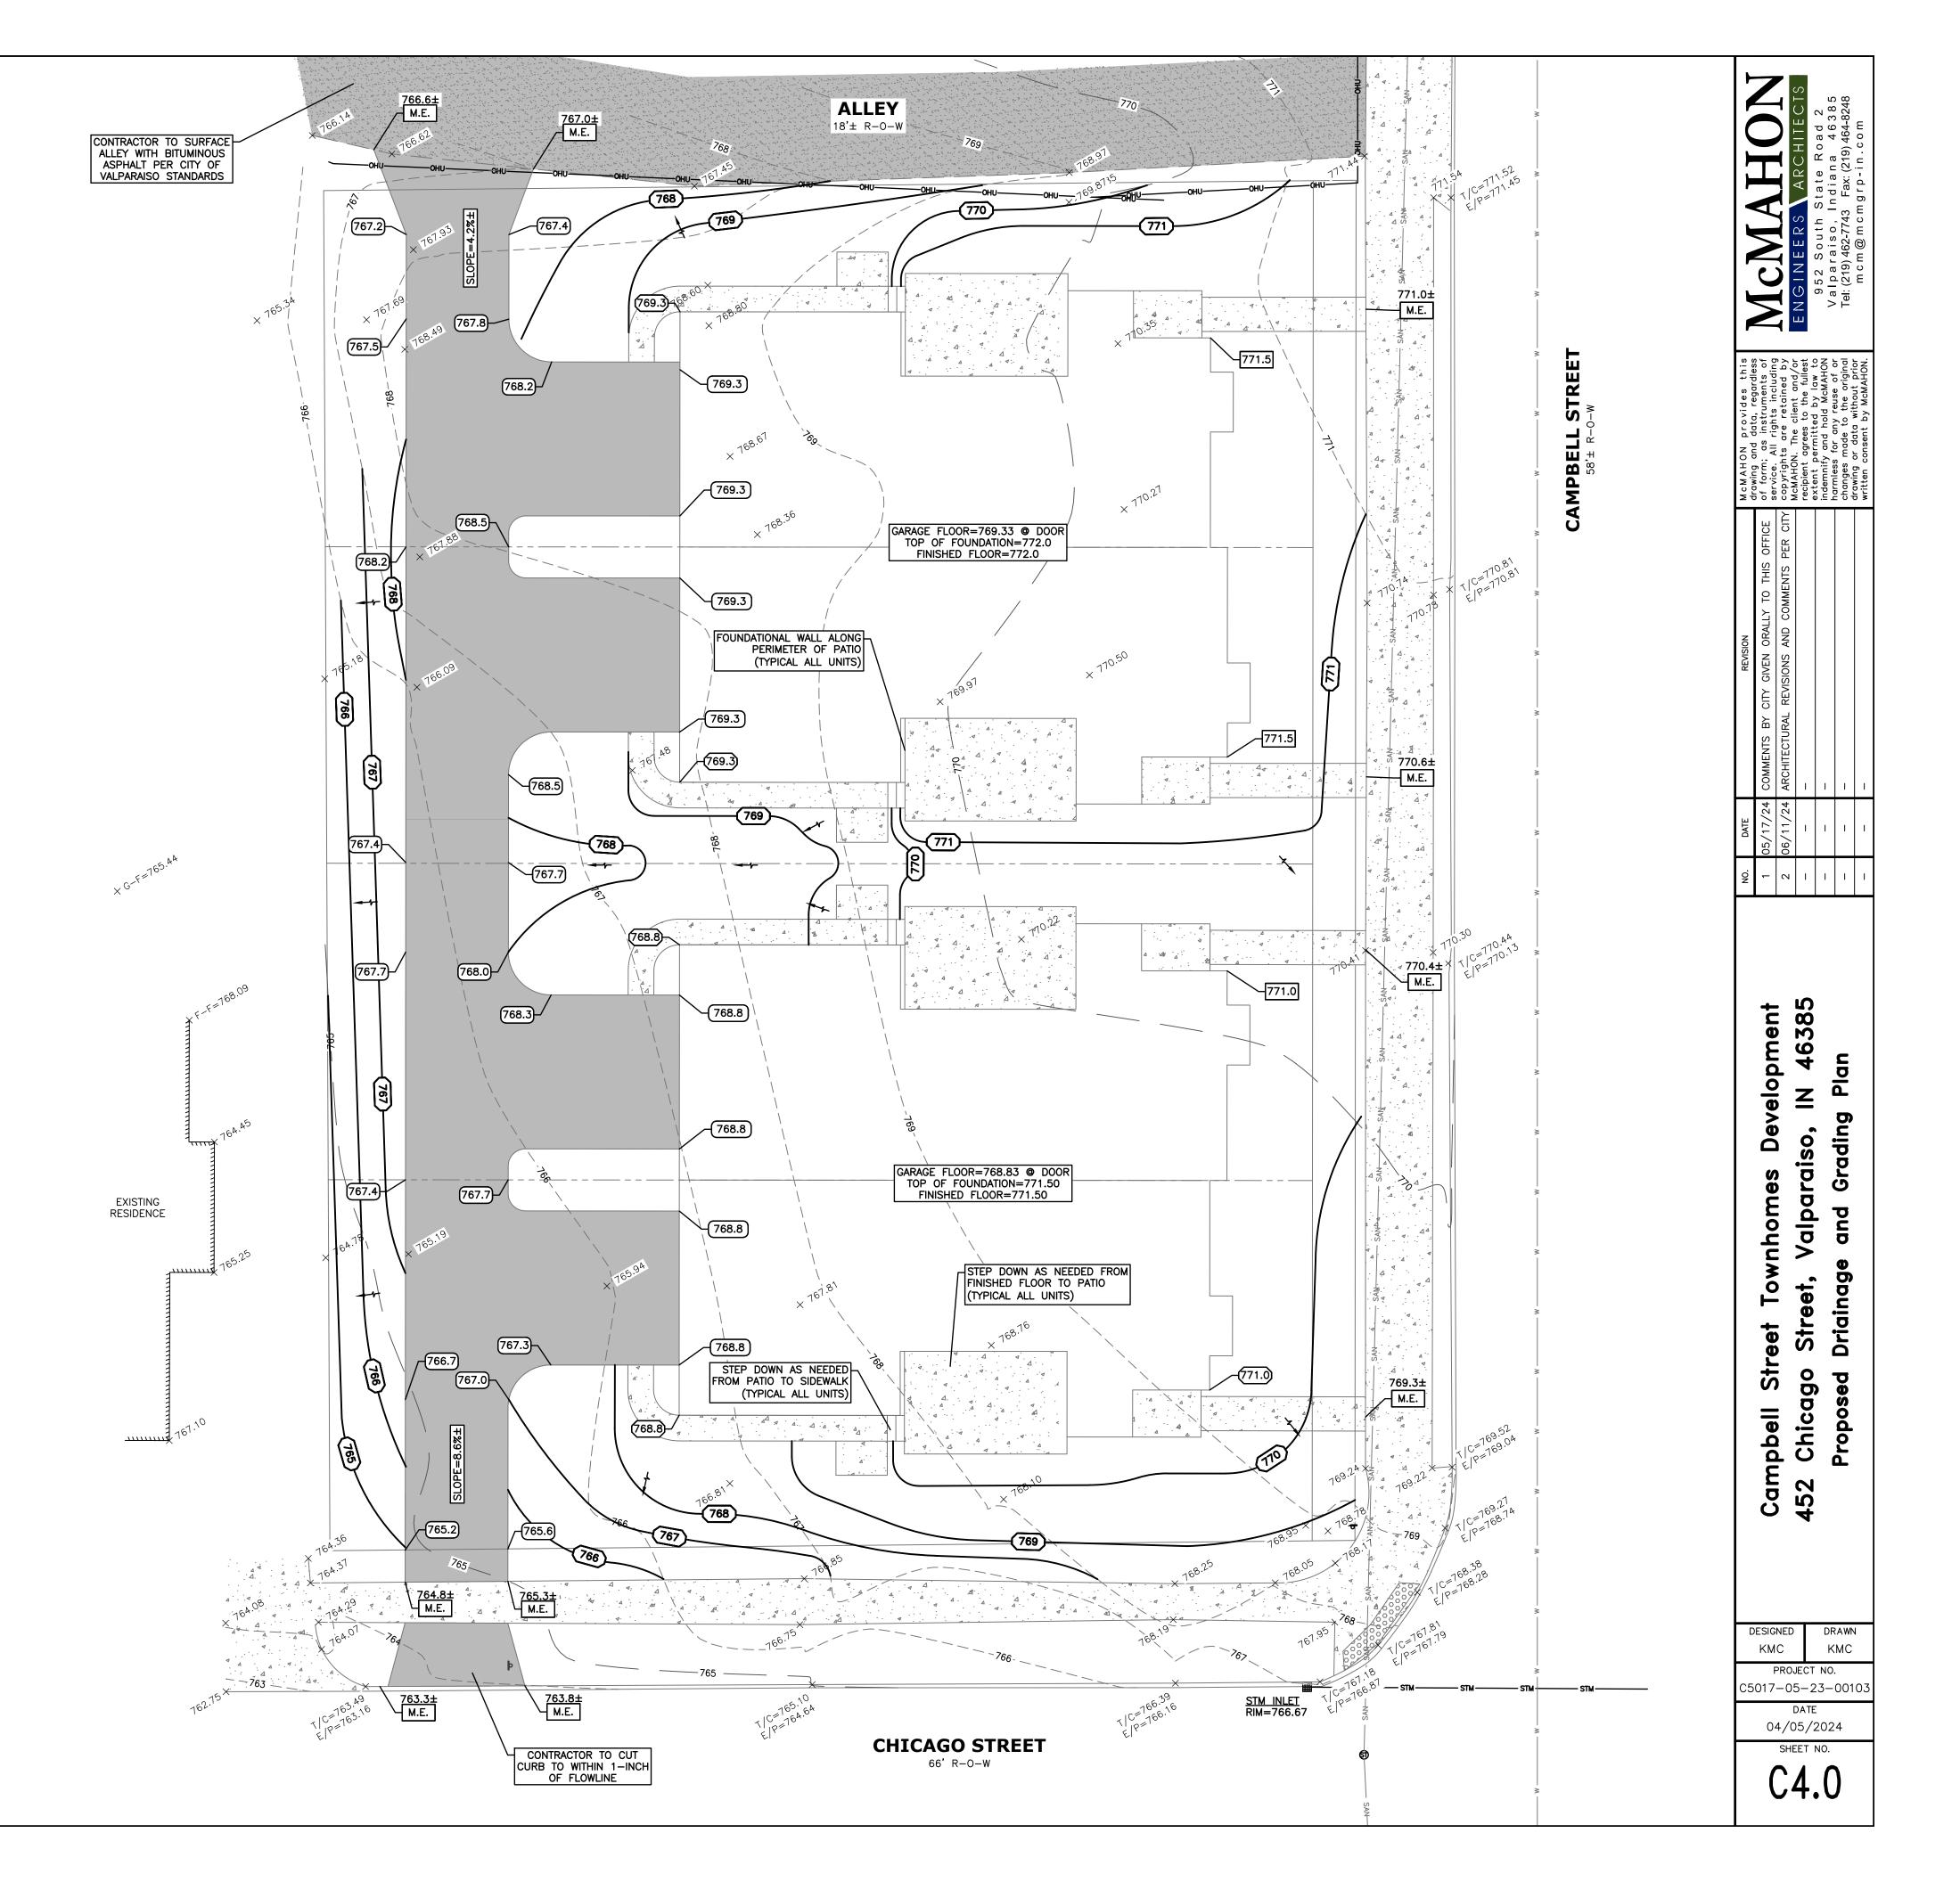





## Storm Water Pollution Prevention Notes

- 1. Total disturbed area = 0.43± Acres.
- Permanently seed all final grade areas (e.g., landscape berms, drainage berms, drainage swales, erosion control structures, etc.) as each is completed and temporarily seed all areas where additional work is not scheduled for a period of more than a year. If areas are to be left undisturbed for more than 14 days, they are to be temporary seeded.
- 3. Existing vegetation, trees and shrubs, are to be removed as necessary. If existing trees are desirable, the owner/developer should enact a tree conservation and protection plan (not anticipated and therefore not included on this plan) to ensure survival of desirable trees from the effects of compaction, grading damage, wound prevention and a plan for tree repairs from construction activities. The owner/developer should see the Soil Conservation Service or the State Forester for assistance if enacting this plan.
- 4. Erosion from all temporary soil storage piles shall be controlled by placing silt fence and/or other appropriate means of sedimentation control around these storage facilities. If stockpile is left undisturbed for more than 14 days, it is to be temporary seeded.
- 5. Except as prevented by inclement weather conditions or other conditions or circumstances beyond control, appropriate vegetative sedimentation control practices shall be initiated within 15 days of the area being inactive (or 15 days of the area scheduled to be inactive). Appropriate vegetative practices include, but are not limited to, seeding, sodding, mulching, covering, or other erosion control measures. Areas to be inactive for said 15 days or more shall be stabilized by vegetation (i.e. temporary seeded).
- 6. Sediment accumulation onto off site roadways shall be minimized, and where necessary, kept cleared every day. Bulk clearing of accumulated sediment shall be returned to the point of likely origin or other suitable on site location(s).
- 7. Appropriate measures shall be taken to minimize or eliminate wastes, unused building materials, and/or other substances from being carried from the site by storm water runoff. proper disposal or management of all wastes, appropriate to the nature of the waste, is required. Contact operating authority (information located this page) for verification of waste removal during building construction.
- 8. Schedule of all erosion and sediment control measures are to be implemented immediately following the start of construction activity and is to be maintained and inspected weekly during construction as well as after each 1/2" rain event.
- 9. Developer to maintain silt fence around building during construction and install permanent seeding when construction is complete. All erosion and sediment control measures shall be inspected and maintained until permanent stabilization has been achieved (i.e. 70% vegetative cover).
- 10. All appropriate erosion control measures shall be implemented in accordance with all applicable requirements and standards of the City of Valparaiso.
- 11. All spoils are to remain onsite and utilized during the course of construction. If for any reason spoil needs to be hauled offsite (not anticipated), Owner/Developer is to be responsible for the activity. Owner/Developer is to track the amount of spoil given or sold to each individual/company and the location at which the spoil will be used. If at any time spoil from subject site is used to disturb more than minimum required amount of site disturbance (based on municipality), that individual/company is responsible for establishing a local erosion permit or Rule 5 permit.
- 12. After construction is completed, including buildings, parking lots constructed, and landscaping, the property owner will take possession of the property. When the property becomes occupied, it is no longer the responsibility of the developer/contractor to maintain the site and the responsibility belong to the current owner/s of the property. Pollutants associated with the proposed land use will most likely be very typical of residential developments. Most expected pollutants will be associated with automobiles: oil, grease, antifreeze, brake dust, rubber fragments, gasoline, diesel fuel, metals, and improper disposal of trash. It is the responsibility of the property owner to provide routine maintenance. Some maintenance items may include trimming vegetation and picking up litter.
- 13. The green space areas of the site should receive routine mowing and trimming.

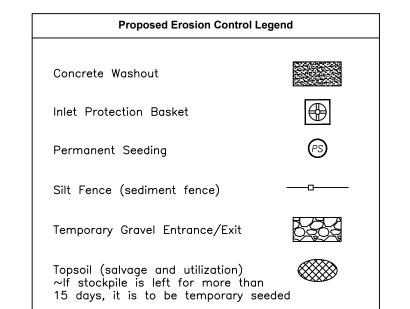

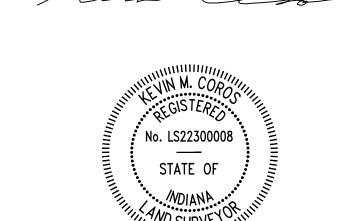

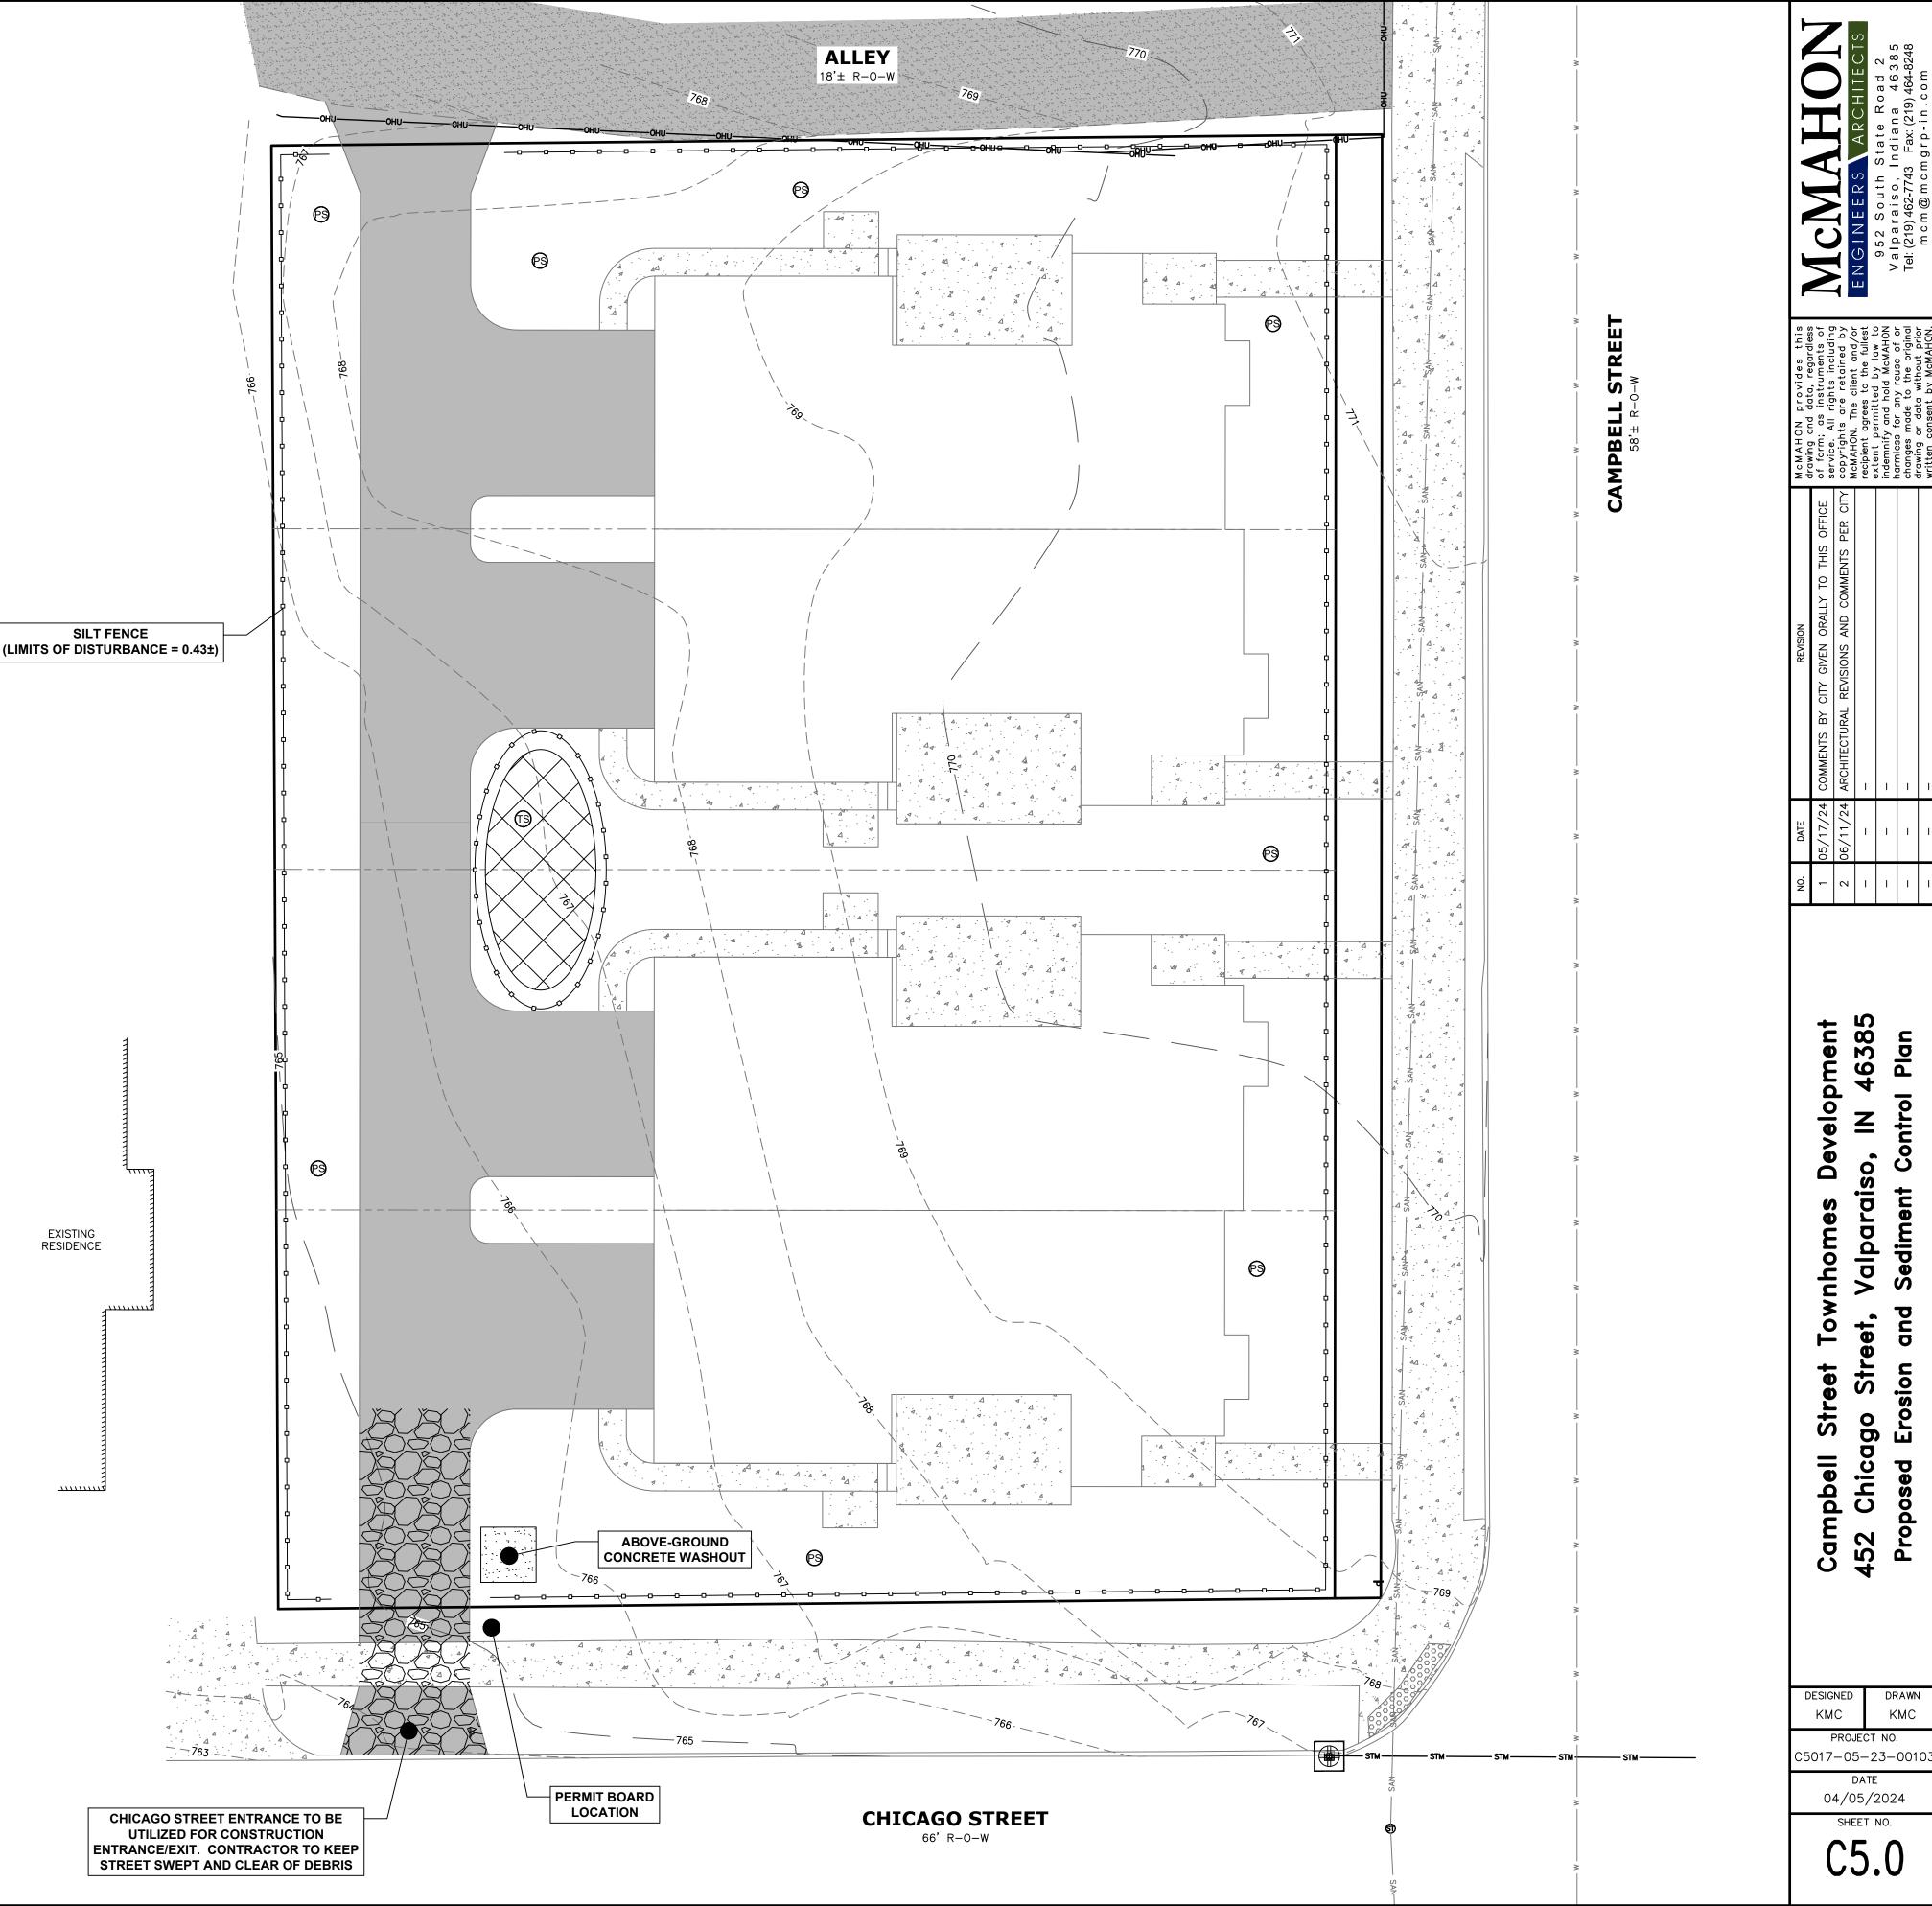

# DISCLAIMER WARNING

MCMAHON ASSOCIATES, INC. HAS PREPARED THIS EROSION AND SEDIMENTATION CONTROL PLAN FOR THE OWNER/DEVELOPER IN ACCORDANCE WITH THE KNOWN REQUIREMENTS AND ORDINANCES. IT IS THE RESPONSIBILITY OF THE OWNER/DEVELOPER FOR COMPLIANCE WITH THIS EROSION AND SEDIMENTATION CONTROL PLAN AND THE RELATED ATTACHMENTS BY ALL SUBCONTRACTORS AND CONSULTANTS THAT PERFORM WORK ON THE PROJECT SITE. THE OWNER/DEVELOPER IS RESPONSIBLE FOR THE ROUTINE INSPECTION AND MAINTENANCE OF THE EROSION AND SEDIMENT CONTROL MEASURES. MCMAHON ASSOCIATES, INC. IS NOT RESPONSIBLE FOR THE ENFORCEMENT OR COMPLIANCE OF THE EROSION AND SEDIMENT CONTROL PLAN. ANY ADDITIONAL EROSION OR SEDIMENT CONTROL MEASURES BEYOND THOSE SPECIFIED IN THIS PLAN, FOR UNFORESEEN OR UNEXPECTED SITUATIONS, WHICH MAY BE REQUIRED BY THE REGULATORY AGENCIES SHALL BE THE RESPONSIBILITY OF THE OWNER/DEVELOPER TO IMPLEMENT.

# **CONTRIBUTING DRAINAGE AREA**

# 1/4 ACRE MAXIMUM.

# AT CURB INLETS WHERE BARRIERS SURROUNDING THEM WOULD BE IMPRACTICAL OF UNSAFE

CATCH-ALL STORMWATER INLET PROTECTOR OR APPROVED EQUAL. MARATHON MATERIALS, INC. 1-800-983-9493 OR WWW.MARATHONMATERIALS.COM

RUNOFF FROM A 2-YR FREQUENCY, 24-HR DURATION STORM EVENT ENTERING A STORM DRAIN WITHOUT BY-PASS FLOW.

FABRICATED METAL WITH TOP WIDTH-LENGTH DIMENSIONS SUCH THAT THE BASKET FITS INTO THE INLET WITHOUT GAPS.

# GEOTEXTILE FABRIC FOR FILTRATION

### INSTALL BASKET CURB INLET PROTECTIONS AS SOON AS INLET BOXES ARE INSTALLED IN THE NEW DEVELOPMENT OR BEFORE LAND DISTURBING ACTIVITIES BEGIN IN A STABILIZED AREA.


- 2. IF NECESSARY, ADAPT BASKET DIMENSIONS TO FIT INLET BOX DIMENSIONS, WHICH VARY ACCORDING TO THE MANUFACTURER AND/OR MODEL.
- 3. SEAL THE SIDE INLETS ON THOSE TYPES OF INLET BOXES THAT HAVE THEM. REMOVE THE GRATE AND PLACE THE BASKET IN THE INLET.
- 5. CUT AND INSTALL A PIECE OF FILTER FABRIC LARGE ENOUGH TO LINE THE INSIDE OF THE BASKET AND EXTEND AT LEAST 6 INCHES BEYOND THE FRAME. 6. REPLACE THE INLET GRATE, WHICH ALSO SERVES TO ANCHOR THE FABRIC

INSPECT AFTER EACH STORM EVENT. REMOVE BUILT-UP SEDIMENT AND REPLACE THE GEOTEXTILE FABRIC AFTER EACH STORM EVENT. 3. PERIODICALLY REMOVE SEDIMENT AND TRACKED-ON SOIL FROM THE STREET (BUT NOT BY

FLUSHING WITH WATER) TO REDUCE THE SEDIMENT LOAD ON THIS CURB INLET PRACTICE.


SEDIMENT NOT REMOVED AND GEOTEXTILE FABRIC NOT REPLACED FOLLOWING A STORM EVENT · RESULTS IN INCREASED SEDIMENT, TRACKING, TRAFFIC HAZARD, AND EXCESSIVE PONDING. GEOTEXTILE FABRIC PERMITTIVITY TOO LOW - RESULTS IN RAPID CLOGGING, THUS SEVERE

PONDING, SEDIMENT ENTERS THE DRAIN IF THE FABRIC BREAKS 3. DRAINAGE AREA TOO LARGE - RESULTS IN SEDIMENT OVERLOAD AND SEVERE PONDING; SEDIMENT ENTERS THE DRAIN IF THE FABRIC BREAKS.

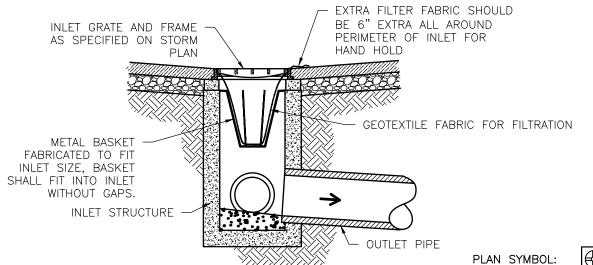

# Inlet Protection Basket

NOT TO SCALE

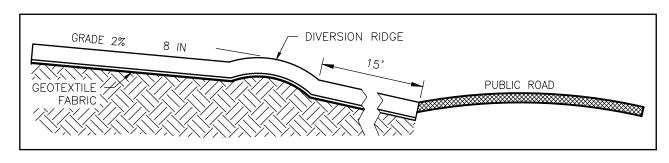

2-3 IN. WASHED STONE (I.N.D.O.T. CA NO. 2) OVER STABLE FOUNDATION

# 6 IN. MINIMUM

12 FT. MINIMUM OR FULL WIDTH OF ENTRANCE/EXIT ROADWAY (WHICHEVER IS GREATER)

# 50 FT. MINIMUM (THE LENGTH CAN BE SHORTER FOR SMALL SITES SUCH AS INDIVIDUAL HOMES

WASHING FACILITY (OPTIONAL LEVEL AREA WITH 3 IN. WASHED STONE MINIMUM OR A COMMERCIAL RACK, AND WASTE WATER DIVERTED TO A SEDIMENT TRAP OR BASIN (PRACTICE 3.72)


MAY BE USED UNDER WET CONDITIONS OR FOR SOILS WITHIN A HIGH SEASONAL WATER TABLE TO PROVIDE GREATER BEARING STRENGTH

- AVOID LOCATING ON STEEP SLOPES OR AT CURBS IN PUBLIC ROADS . REMOVE ALL VEGETATION AND OTHER OBJECTIONABLE MATERIAL FROM THE FOUNDATION AREA, AND GRADE AND
- 3. IF SLOPE TOWARDS THE ROAD EXCEEDS 2%, CONSTRUCT A 6-8 IN. HIGH WATER BAR (RIDGE) WITH 3:1 SIDE
- SLOPES ACROSS THE FOUNDATION ARE ABOUT 15 FT. FROM THE ENTRANCE TO DIVERT RUNOFF AWAY FROM THE ROAD (PRACTICE 3.24) SEE EXHIBIT.
- 4. INSTALL PIPE UNDER THE PAD IF NEEDED TO MAINTAIN PROPER PUBLIC ROAD DRAINAGE IF WET CONDITIONS ARE ANTICIPATED, PLACE GEOTEXTILE FABRIC ON THE GRADED FOUNDATION TO IMPROVE STABILITY
- 6. PLACE STONE TO DIMENSIONS AND GRADE SHOWN IN THE EROSION/SEDIMENT CONTROL PLAN, LEAVING THE SURFACE SMOOTH AND SLOPED FOR DRAINAGE
- 7. DIVERT ALL SURFACE RUNOFF AND DRAINAGE FROM THE STONE PAD TO A SEDIMENT TRAP OR BASIN

INSPECT ENTRANCE PAD AND SEDIMENT DISPOSAL AREA WEEKLY AND AFTER STORM EVENTS OR HEAVY USE RESHAPE PAD AS NEEDED FOR DRAINAGE AND RUNOFF CONTROL

Temporary Construction Entrance (Stone)

- TOPDRESS WITH CLEAN STONE AS NEEDED
- 4. IMMEDIATELY REMOVE MUD AND SEDIMENT TRACKED OR WASHED ONTO PUBLIC ROADS BY BRUSHING OR SWEEPING. FLUSHING SHOULD ONLY BE USED IF THE WATER IS CONVEYED INTO A SEDIMENT TRAP OR BASIN
- 5. REPAIR ANY BROKEN ROAD PAVEMENT IMMEDIATELY



# Permanent Seeding Specifications


FENCE POSTS

FENCE JOINT

SECTIONB-B,

- COMPACTED EARTH

FILTER FABRIC

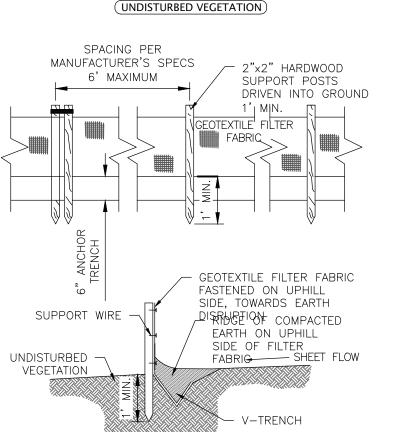

# WRAPPFD AROUND FENCE

# POOL AREA FLAT (LESS THAN 1% SLOPE), WITH SEDIMENT STORAGE OF 945 CU.FT./ACRE DISTURBED.

SECTION A-A

AMOCO NO. 2130 SILT STOP WITH POSTS, MANUFACTURED BY MID-WEST CONSTRUCTION PRODUCTS AT 1-800-426-9647 OR 1-317-781-2380, OR APPROVED EQUAL.

# 2 X 2 IN. HARDWOOD STAKES WITH A LENGTH EQUAL TO THE HEIGHT OF THE SILT FENCE PLUS 1 FT.

## DRIVE STAKES 1 FT. MIN. INTO GROUND AND ATTACH FABRIC TO STAKES WITH STAPLER. BOTTOM OF FABRIC SHALL BE PLACED UNDER 6 INCHES OF COMPACTED SOIL TO PREVENT SEDIMENT

# 3. ENSURE THAT ALL SUPPORTING POSTS ARE ON THE DOWN SLOPE SIDE OF THE FENCING.

### EVERY SEVEN CALENDAR DAYS. REMOVE BUILT-UP SEDIMENT AND REPAIR/REPLACE THE SILT FENCE AS NEEDED SILT FENCES WILL BE PERIODICALLY INSPÉCTED AND AFTER EACH STORM EVENT TO ENSURE IT IS FUNCTIONING PROPERLY AND TO MAKE ANY REPAIRS IF NECESSARY. DEPOSITED SEDIMENTS WILL BE

INSPECT WITHIN 24 HOURS OF A STORM EVENT OF 0.5" OF RAINFALL OR GREATER AND AT LEASE ONCE

REMOVED WHEN IT REACHES HALF THE HEIGHT OF THE FENCE OR IS CAUSING THE FENCE TO BULGE.

# Silt Fence (Silt Saver SS-700)

PLAN SYMBOL: ———

# NOT TO SCALE

# PERMANENT SEEDING

PERMANENTLY SEED ALL FINAL GRADE AREAS (E.G. LANDSCAPE BERMS, DRAINAGE SWALES, EROSION CONTROL STRUCTURES, ETC.) AS EACH IS COMPLETED AND ALL AREAS WHERE ADDITIONAL WORK IS NOT SCHEDULED FOR A PERIOD OF MORE THAN A

- SITE PREPARATION

  1. THESE INSTALLATION PRACTICES ARE NEEDED TO CONTROL EROSION, SEDIMENTATION,
- AND WATER RUNOFF, SUCH AS TEMPORARY GRADE THE SITE AS SPECIFIED IN THE CONSTRUCTION PLAN AND FILL IN
- DEPRESSIONS THAT CAN COLLECT WATER. 3. ADD TOPSOIL TO ACHIEVE NEEDED DEPTH FOR ESTABLISHMENT OF VEGETATION

# FERTILIZE AS REQUIRED

2. TILL THE SOIL TO OBTAIN A UNIFORM SEEDBED, WORKING THE FERTILIZER INTO THE SOIL 2-4 IN. DEEP WITH A DISK OR RAKE OPERATED ACROSS THE SLOPE.

- OPTIMUM SEEDING DATES ARE MARCH 1-MAY 10 AND AUGUST 10-SEPTEMBER 30. PERMANENT SEEDING DONE BETWEEN MAY 10 AND AUGUST 10 MAY NEED TO BE
- IRRIGATED. AS AN ALTERNATIVE, USE TEMPORARY SEEDING UNTIL THE PREFERRED DATE
- 1. SELECT A SEEDING MIXTURE AND RATE FROM THE TABLE AND PLANT AT DEPTH AND ON DATES SHOWN.
- 2. APPLY SEED UNIFORMLY WITH A DRILL OR CULTIPACKER-SEEDER OR BY BROADCASTING, AND COVER TO THE DEPTH SHOWN.
- 3. IF DRILLING OR BROADCASTING, FIRM THE SEEDBED WITH A ROLLER OR
- CULTIPACKER. 4. MULCH SEEDED AREAS. USE EROSION CONTROL BLANKETS ON SLOPING AREAS. IF
- SEEDING IS DONE WITH A HYDROSEEDER, FERTILIZER AND MULCH CAN BE APPLIED WITH THE SEED IN A SLURRY MIXTURE.

- INSPECT PERIODICALLY AFTER PLANTING TO SEE THAT VEGETATIVE STANDS ARE ADEQUATELY ESTABLISHED, RE-SEED 2. CHECK FOR EROSION DAMAGE AFTER STORM EVENTS AND REPAIR, RESEED AND

S TABLE PROVIDES SEVERAL SEEDING OPTIONS. ADDITIONAL SEED SPECIES AND MIXTURES ARE AVAILABLE COMMERCIALLY. WHEN SELECTING A MIXTURE, CONSIDER SITE CONDITIONS, INCLUDING SOIL PROPERTIES (E.G., SOIL PH AND DRAINAGE), SLOPE ASPECT AND THE TOLERANCE OF EACH SPECIES TO SHADE AND DROUGHT.

SEED SPECIES AND MIXTURES	RATE/ACRE	OPTIMUM SOIL PH
OPEN AND DISTURBED AREAS	(REMAINING IDLE FOR MORE	THAN ONE YEAR)
PERENNIAL RYEGRASS	35 TO 50 LBS	5.6 TO 7.0
+WHITE OR LADINO COVER	1 TO 2 LBS	
KENTUCKY BLUEGRASS	20 LBS	5.5 TO 7.5
+SMOOTH BROMEGRASS	10 LBS	
+SWITCHGRASS	3 LBS	
+TIMOTHY	4 LBS	
+PERENNIAL RYEGRASS	10 LBS	PLAN SYMBOL:
+WHITE OR LADINO CLOVER	1 TO 2 LBS	I LAN STWIDGE.

HESE INSTALLATION PRACTICES ARE NEEDED TO CONTROL EROSION, SEDIMENTATION, AND WATER RUNOFF, SUCH AS TEMPORARY AND PERMANENT DIVERSIONS, SEDIMENT TRAPS OR BASINS, SILT FENCES, AND STRAW BALE DAMS. 2. GRADE THE SITE AS SPECIFIED IN THE CONSTRUCTION PLAN

2. WORK THE FERTILIZER INTO THE SOIL 2-4 IN. DEEP WITH A DISK OR RAKE OPERATED ACROSS

1. SELECT A SEEDING MIXTURE AND RATE FROM THE TABLE AND PLANT AT DEPTH AND ON DATES

# 2. APPLY SEED UNIFORMLY WITH A DRILL OR CULTIPACKER SEEDER OR BY BROADCASTING, AND COVER TO THE DEPTH SHOWN

- 3. IF DRILLING OR BROADCASTING, FIRM THE SEEDBED WITH A ROLLER OR CULTIPACKER
- 4. MULCH SEEDED AREAS TO INCREASE SEEDING SUCCESS 5. DISTURBED AREAS LEFT INACTIVE FOR MORE THAN 14 DAYS SHOULD BE TEMPORARY SEEDED

# INSPECT PERIODICALLY AFTER PLANTING TO SEE THAT VEGETATIVE STANDS ARE ADEQUATELY

- ESTABLISHED, RE-SEED IF NECESSARY 2. CHECK FOR EROSION DAMAGE AFTER STORM EVENTS AND REPAIR, RE-SEED AND MULCH IF
- 3. TOPDRESS FALL SEEDED WHEAT OR RYE SEEDING WITH 50LBS./ACRE OF NITROGEN IN FEBRUARY OR MARCH IF NITROGEN DEFICIENCY IS APPARENT

# **TEMPORARY SEEDING RECOMMENDATIONS**

MINIEREDATION		
RATE/ACRE	PLANTING DEPTH	OPTIMUM DATES**
150 LBS	1" TO 1−1/2"	9/15 TO 10/30
100 LBS	1" 3,	/1 TO 4/15
40 LBS	1/4"	3/1 TO 5/1
	8,	/1 TO 9/1
40 LBS	1" TO 2"	5/1 TO 6/1
35 LBS	1" TO 2" 5,	/1 TO 7/30
	RATE/ACRE 150 LBS 100 LBS 40 LBS 40 LBS	RATE/ACRE PLANTING DEPTH  150 LBS 1" TO 1-1/2"  100 LBS 1" 3, 40 LBS 1/4"  40 LBS 1" TO 2"

\* PERENNIAL SPECIES MAY BE USED AS TEMPORARY COVER, ESPECIALLY IF THE AREA TO BE SEEDED

\*\* SEEDING DONE OUTSIDE THE OPTIMUM DATES INCREASES THE CHANCE OF SEEDING FAILURE

# PLAN SYMBOL: (TS)

# Temporary Seeding Specifications

SALVAGING AND STOCK PILING DETERMINE DEPTH AND SUITABILITY OF TOPSOIL AT THE SITE


Topsoil (Salvage & Utilization)

- PRIOR TO STRIPPING TOPSOIL, INSTALL ANY SITE-SPECIFIC DOWNSLOPE PRACTICES NEEDED TO CONTROL RUNOFF AND SEDIMENT
- REMOVE THE SOIL MATERIAL NO DEEPER THAN WHAT THE COUNTY SOIL SURVEY DESCRIBES AS "SURFACE SOIL" (I.E., A OR AP HORIZON) 4. STOCKPILE THE MATERIAL IN ACCESSIBLE LOCATIONS THAT NEITHER INTERFERE WITH OTHER
- CONSTRUCTION ACTIVITIES NOR BLOCK NATURAL DRAINAGE; AND INSTALL SILT FENCES, STRAW BALES, OR OTHER BARRIERS TO TRAP SEDIMENT. (SEVERAL SMALLER PILES AROUND THE CONSTRUCTION
- SITE ARE USUALLY MORE EFFICIENT AND EASIER TO CONTAIN THAN ONE LARGE PILE.) IF SOIL IS STOCKPILED FOR MORE THAN 6 MONTHS, IT SHOULD BE TEMPORARILY SEEDED OR COVERED WITH A TARP OR SURROUNDED BY A SEDIMENT BARRIER

- PRIOR TO APPLYING TOPSOIL, GRADE THE SUBSOIL AND ROUGHEN THE TOP 3-4 IN. BY DISKING. THIS HELPS THE TOPSOIL BOND WITH THE SUBSOIL
- 2. DO NOT APPLY THE TOPSOIL WITH THE SITE IS WET, MUDDY OR FROZEN, BECAUSE IT MAKES SPREADING DIFFICULT, INHIBITS BONDING, AND CAN CAUSE COMPACTION PROBLEMS 3. APPLY TOPSOIL EVENLY TO A DEPTH OF AT LEAST 4 IN (8-12 IN. IF THE UNDERLYING MATERIAL IS
- BEDROCK, LOOSE SAND, ROCK FRAGMENTS, GRAVEL OR OTHER UNSUITABLE SOIL MATERIAL) COMPACT SLIGHTLY TO IMPROVE CONTACT WITH THE SUBSOIL 4. AFTER SPREADING, GRADE AND STABILIZE


# INSPECT NEWLY TOPSOILED AREAS FREQUENTLY UNTIL VEGETATION IS ESTABLISHED


# 2. REPAIR ERODED OR DAMAGED AREAS AS REPLANT

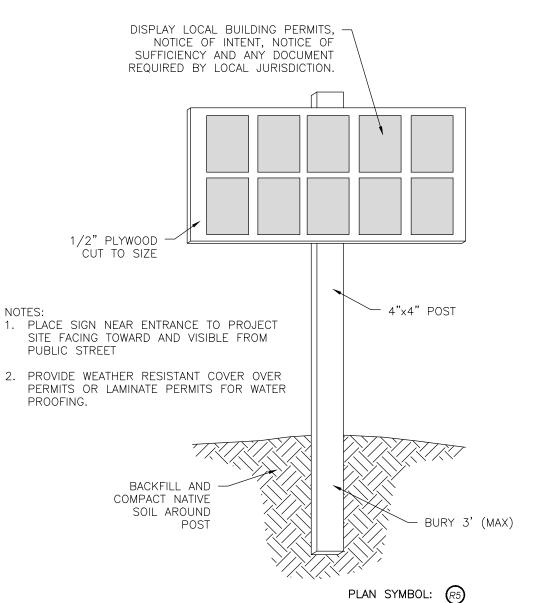

# Permit Posting Detail

NOT TO SCALE

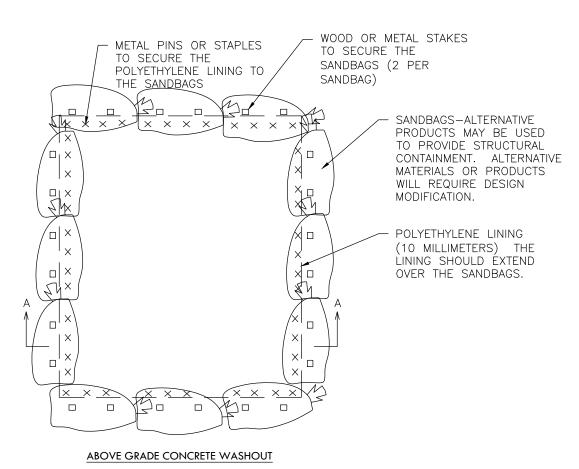

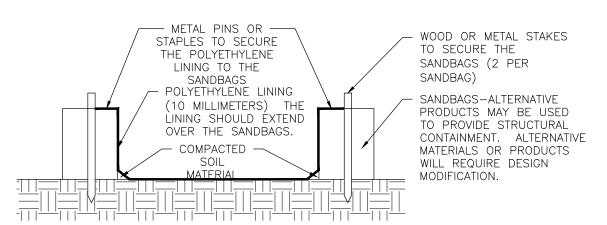

SECTION A-A NOTE: SIZE OF WASHOUT IS TO BE 10'x10' MINIMUM

- LOCATE CONCRETE WASHOUT SYSTEMS AT LEAST 50 FEET FROM ANY CREEKS, WETLANDS, DITCHES, KARST FEATURES, OR STORM DRAINS/MANMADE CONVEYANCE SYSTEMS.
- LOCATE CONCRETE WASHOUT SYSTEMS IN RELATIVELY FLAT AREAS THAT HAVE ESTABLISHED VEGETATIVE COVER AND DO NOT RECEIVE RUNOFF FROM ADJACENT LAND AREAS. • LOCATE AWAY FROM OTHER CONSTRUCTION TRAFFIC IN AREAS THAT PROVIDE EASY ACCESS FOR CONCRETE TRUCKS.

- MINIMUM OF TEN MILLIMETER POLYETHYLENE SHEETING, FREE OF HOLES, TEARS, AND OTHER DEFECTS. ORANGE SAFETY FENCING OR EQUIVALENT.
- METAL PINS OR STAPLES SIX INCHES IN LENGTH MINIMUM.

- A BASE SHALL BE CONSTRUCTED AND PREPARED THAT IS FREE OF ROCKS AND OTHER DEBRIS THAT MAY CAUSE TEARS OR PUNCTURES IN THE POLYETHYLENE LINING.
- INSTALL THE POLYETHYLENE LINING. FOR EXCAVATED SYSTEMS, THE LINING SHOULD EXTEND OVER THE ENTIRE EXCAVATION. THE LINING FOR BERMED SYSTEMS SHOULD BE INSTALLED OVER THE POOLING AREA WITH ENOUGH MATERIAL TO EXTEND THE LINING OVER THE BERM OR CONTAINMENT SYSTEM. THE LINING SHOULD BE SECURED WITH PINS, STAPLES, OR OTHER
- · PLACE FLAGS, SAFETY FENCING, OR EQUIVALENT TO PROVIDE A BARRIER TO CONSTRUCTION EQUIPMENT AND OTHER TRAFFIC.
- INSTALL SIGN THAT IDENTIFIES CONCRETE WASHOUT AREAS. WHERE NECESSARY, PROVIDE STABLE INGRESS AND EGRESS OR ALTERNATIVE APPROACH PAD.

- COMPLETE CONSTRUCTION/INSTALLATION OF THE SYSTEM AND HAVE WASHOUT LOCATIONS OPERATIONAL PRIOR TO CONCRETE
- IT IS RECOMMENDED THAT WASHOUT SYSTEMS BE RESTRICTED TO WASHING CONCRETE FROM MIXER AND PUMP TRUCKS AND NOT USED TO DISPOSE OF EXCESS CONCRETE OR RESIDUAL LOADS DUE TO POTENTIAL TO EXCEED THE DESIGN CAPACITY OF
- THE WASHOUT SYSTEM. • INSTALL SYSTEMS AT STRATEGIC LOCATIONS THAT ARE CONVENIENT AND IN CLOSE PROXIMITY TO WORK AREAS AND IN SUFFICIENT NUMBER TO ACCOMMODATE THE DEMAND FOR DISPOSAL.

# • INSTALL SIGN IDENTIFYING THE LOCATION OF CONCRETE WASHOUT SYSTEMS.


- INSPECT DAILY AND AFTER EACH STORM EVENT. • INSPECT THE SYSTEM FOR LEAKS, SPILLS, AND TRACKING OF SOIL BY EQUIPMENT.
- INSPECT THE POLYETHYLENE LINING FOR FAILURE, INCLUDING TEARS AND PUNCTURES. • ONCE CONCRETE WASTES HARDEN, REMOVE AND DISPOSE OF THE MATERIAL.
- EXCESS CONCRETE SHOULD BE REMOVED WHEN THE WASHOUT SYSTEM REACHES 50 PERCENT OF THE DESIGN CAPACITY. USE OF THE SYSTEM SHOULD BE DISCONTINUED UNTIL APPROPRIATE MEASURES CAN BE INITIATED TO CLEAN THE STRUCTURE.

  • UPON REMOVAL OF THE SOLIDS, INSPECT THE STRUCTURE. REPAIR THE STRUCTURE AS NEEDED OR CONSTRUCT A NEW
- DISPOSE OF ALL CONCRETE IN A LEGAL MANNER. REUSE THE MATERIAL ON SITE, RECYCLE, OR HAUL THE MATERIAL TO AN APPROVED CONSTRUCTION/DEMOLITION LANDFILL SITE. RECYCLING OF MATERIAL IS ENCOURAGED. THE WASTE MATERIAL CAN BE USED FOR MULTIPLE APPLICATIONS INCLUDING BUT NOT LIMITED TO ROADBEDS AND BUILDING. THE AVAILABILITY FOR
- RECYCLING SHOULD BE CHECKED LOCALLY. • THE PLASTIC LINER SHOULD BE REPLACED AFTER EVERY CLEANING; THE REMOVAL OF MATERIAL WILL USUALLY DAMAGE THE
- THE CONCRETE WASHOUT SYSTEM SHOULD BE REPAIRED OR ENLARGED AS NECESSARY TO MAINTAIN CAPACITY FOR CONCRETE CONCRETE WASHOUT SYSTEMS ARE DESIGNED TO PROMOTE EVAPORATION. HOWEVER, IF THE LIQUIDS DO NOT EVAPORATE AND.
- ACCEPTABLE METHOD. DISPOSAL MAY BE ALLOWED AT THE LOCAL SANITARY SEWER AUTHORITY PROVIDED THEIR NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMITS ALLOW FOR ACCEPTANCE OF THIS MATERIAL. ANOTHER OPTION WOULD BE TO UTILIZE A SECONDARY CONTAINMENT SYSTEM OR BASIN FOR FURTHER DEWATERING. • INSPECT CONSTRUCTION ACTIVITIES ON A REGULAR BASIS TO ENSURE SUPPLIERS, CONTRACTORS, AND OTHERS ARE UTILIZING

THE SYSTEM IS NEAR CAPACITY IT MAY BE NECESSARY TO VACUUM OR REMOVE THE LIQUIDS AND DISPOSE OF THEM IN AN

DESIGNATED WASHOUT AREAS. IF CONCRETE WASTE IS BEING DISPOSED OF IMPROPERLY, IDENTIFY THE VIOLATORS AND TAKE • WHEN CONCRETE WASHOUT SYSTEMS ARE NO LONGER REQUIRED, THE CONCRETE WASHOUT SYSTEMS SHALL BE CLOSED. DISPOSE OF ALL HARDENED CONCRETE AND OTHER MATERIALS USED TO CONSTRUCT THE SYSTEM.

# Concrete Washout





Z----

PROJECT NO 25017-05-23-00103

SHEET NO.


en: Develop Townhom alpa

Street D

Campbell 452 Chica • HOLES, DEPRESSIONS, AND OTHER LAND DISTURBANCES ASSOCIATED WITH THE SYSTEM SHOULD BE BACKFILLED, GRADED, AND

> DESIGNED DRAWN KMC KMC

04/05/2024

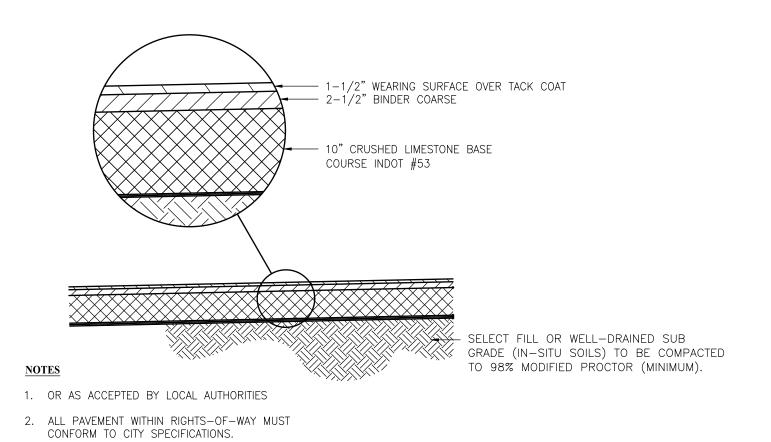


# Pavement Cross-Section

NOT TO SCALE

Keni Ceso


No. LS22300008


STATE OF

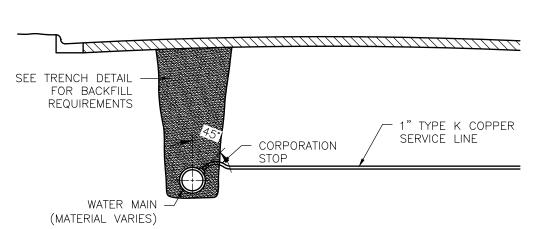






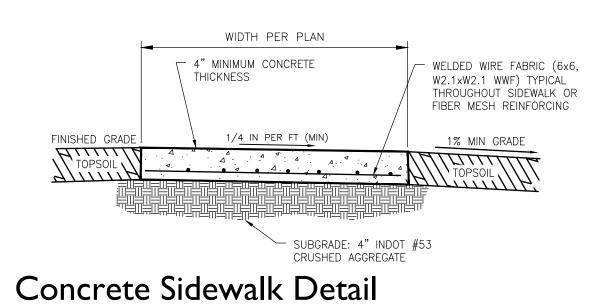

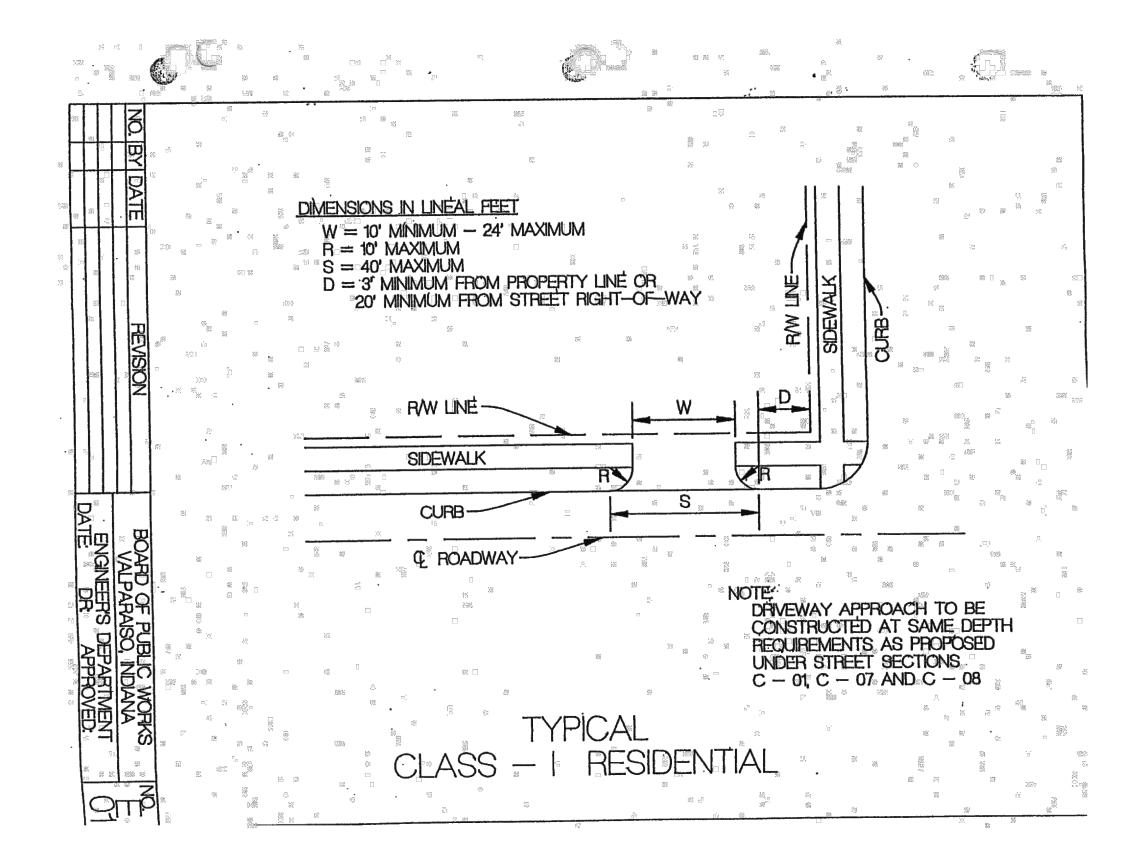

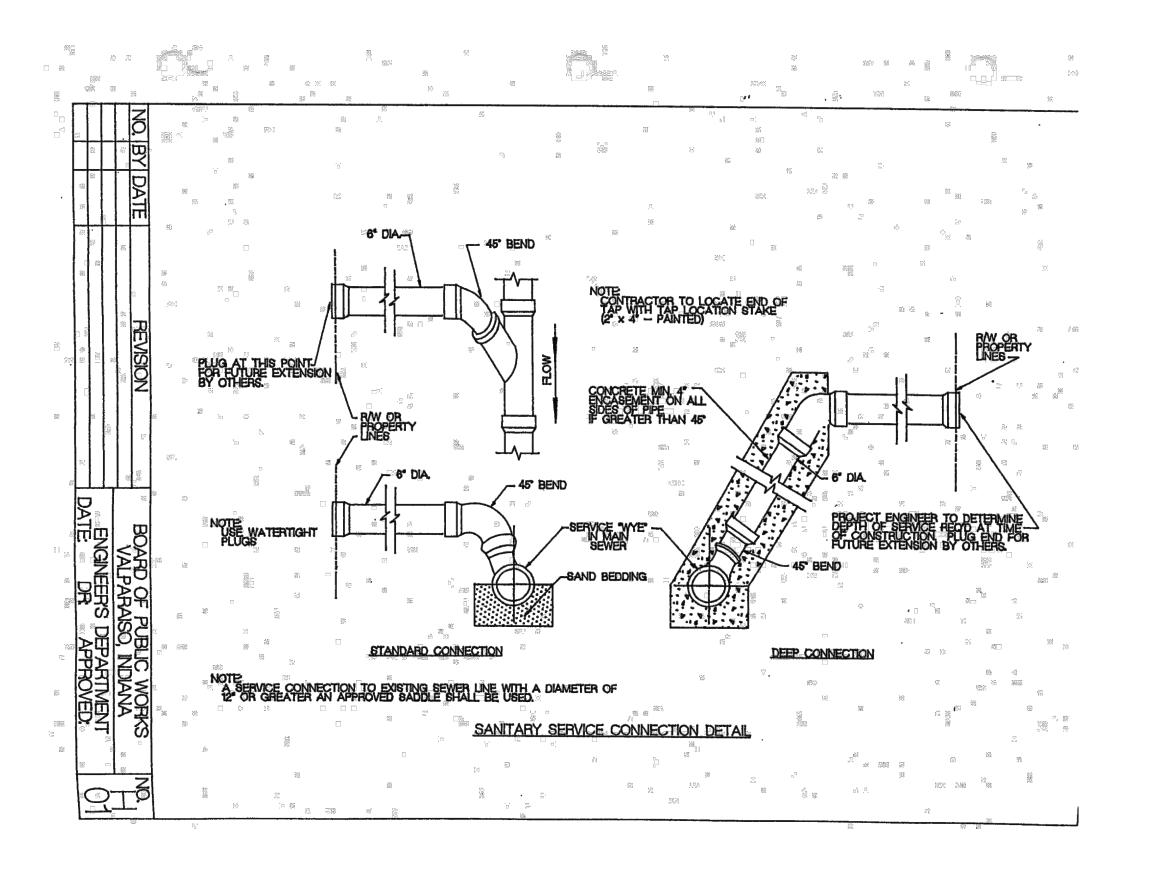

		<b>√</b> L	11			
McMAHON provides this	of form; as instruments of service. All rights including	copyrights are retained by McMAHON The client and/or	recipient agrees to the fullest	indemnify and hold McMAHON	changes made to the original	written consent by McMAHON.
REVISION	5/17/24 COMMENTS BY CITY GIVEN ORALLY TO THIS OFFICE	6/11/24 ARCHITECTURAL REVISIONS AND COMMENTS PER CITY	_	1	_	ı
DATE	05/17/24	06/11/24	1	1	1	I
NO.	1	2	1	1	1	1

Campbell Street Townhomes Development 452 Chicago Street, Valparaiso, IN 46385

DESIGNED DRAWN

KMC KMC

PROJECT NO.

C5017-05-23-00103

DATE 04/05/2024 SHEET NO.

C6.1

# I - General Construction

The contractor, subcontractors, their assigns, etc. are considered to be skilled and experienced in the use and interpretations of plans and specifications such as those included in the bid documents or herein described for this contract. Said contractor and subsequent sub—contractors, assigns, etc. are to have carefully reviewed said documents and have found them free of ambiguities and are sufficient for bid and construction purposes.

- A. The Contractor shall provide all labor and materials necessary for a complete and finished installation, including any alterations to work already performed, entirely to the satisfaction of the Owner and/or Engineer.
- B. All labor, materials, and systems or components thereof to be in full accordance with the requirements of all governing codes and regulations having jurisdiction over this work. Each Contractor to obtain and pay for all permits and inspections as required for proper installation of their respective work.
- C. The Contractor shall visit the site and take into account all existing conditions as they may affect the work, and to include in its proposal any changes as may be required by supplementation to the new work. Failure to recognize work required shall not be reason for additional compensation after the letting of the contract.
- D. All work shall be performed in the best and most professional manner by craftsmen skilled in their respective trades and in accordance with the agreed upon schedule with the Owner.
- E. The Contractor shall notify all utility companies for field locations of their facilities prior to commencement of construction. The Contractor shall be responsible for the maintenance and preservation of the facilities.
- F. All elevations are U.S.G.S. Datum.
- G. Trench backfill material meeting INDOT Standards shall be used in all utility trenches under existing or proposed pavement and sidewalks.
- H. The underground contractor shall deposit and level all sewer spoil onsite as directed by the Engineer or Owner. The Underground Contractor shall return the pavement subgrade to the plus or minus 0.10 elevation as left by the Grading Contractor. The fill shall be compacted to 95% of maximum dry density as determined by ASTM Designation D1557-70. This work shall be considered as incidental to the underground contract.
- I. The cost of all testing of the underground utilities as required shall be considered as incidental to the underground contract. See sanitary sewer construction for testing.
- J. Whenever equipment or material is identified in the specifications by reference to a manufacturer's brand, trade name, catalogue number, or similar notation, is intended to merely establish a standard. A substitution may be permitted provided a prior request is submitted in writing and approved by the Engineer.
- K. Contractor shall call the Indiana Underground Plant Protection Systems, Inc. at (800) 382—5544 for utility locations prior to commencement of construction.
- L. Locations of existing underground utilities shown on the plans are taken from existing records. The actual locations and depths of these utilities to be verified by the Contractor in the field.
- M. There shall be no structures or objects, permanent or temporary, erected within ten feet of the sanitary sewer and water mains. Where ten foot separation cannot physically be maintained, structure foundation depth shall be equal to or below the pipe invert.
- N. "As—Built" reproducible drawing(s) for underground utilities shall be prepared by the Contractor and submitted to the Engineer and the local municipal engineer prior to project completion. The drawings shall be certified by a licensed professional engineer or land
- O. The Contractor shall provide a temporary installation of electric and water service and toilet facilities as required, if such services are not available on the construction site.
- P. Safety barricades, fences, temporary walks and signals shall be erected in compliance with the local building code and police regulations.
- Q. All materials shall be as shown on drawings or as per specification. Any substitutes shall be permitted only upon receiving written approval from the Owner and/or Engineer. Upon request by the Owner and/or Engineer to furnish samples, the Contractor shall submit the requested samples for approval.
- R. Any discrepancies, conflicts or ambiguities on the drawings shall be brought to the attention of the Engineer. Failure to do so will not relieve the Contractor of bearing additional costs for labor, materials, and installation to complete its work as intended.
- S. All materials and workmanship of each trade shall be guaranteed for a period of 1 (one) year from the time of final acceptance and payment by the Owner.
- T. The Contractor shall be responsible for verifying field measurements and design dimensions before ordering materials and prefabricated items. Any necessary adjustments shall be made in accordance with the decision of the Owner and/or Engineer.
- U. The Contractor shall coordinate the work for all trades and schedule the timing as not to cause delays to any phase of construction due to late scheduling or interconnected work.
- V. After substantial completion of the project, the Contractor shall complete all defects and omissions noted at the final inspection in the time period agreed upon at the inspection.
- W. The Engineer and his consultants do not warrant or guarantee the accuracy and completeness of the work product herein beyond a reasonable diligence. If any mistakes, omissions or discrepancies are found to exist within the work product, the Engineer shall be promptly notified so that he may have the opportunity to take appropriate action necessary to resolve the differences. Failure to promptly notify the Engineer of such conditions shall absolve the Engineer from any responsibility for the consequences of such failure. Actions taken without the knowledge and consent of the Engineer, or in contradiction to the Engineer's work product or related recommendations, shall become the responsibility not of the Engineer but the parties responsible for taking such action.
- X. The Contractor agrees to indemnify and hold the Owner, Engineer and the Municipality, County or Township where the work is to be performed or constructed harmless from all liability and expenses including the cost of defending actions arising out of the performance of the work undertaken, or out of any claim by any Subcontractor or anyone who furnishes material, equipment or labor in the work of this project.

# II - Sanitary Sewer (Materials)

- A. All sanitary sewer mains and service connections shall be PVC Pipe SDR 35. The pipe shall meet ASTM D3034 and be installed as outlined in ASTM D2321. The service connections shall be commercial "Y"s unless the size is not manufactured. Solvent welded cap "T"s may be substituted in this event. Note: Sanitary sewer material to be PVC ASTM—D 1785 Schedule 40 when 10ft. separation cannot be maintained.
- B. Where min. vertical or horizontal clearances from water mains cannot be maintained, use ductile iron pipe which shall conform to the requirement of ASA A21.51, Class 52, cement lined with push—on joints, ASA A21.11. Fittings shall conform to ASA Specifications A21.10.
- C. Manhole frames and covers for sanitary manholes meeting ASTM A48 (latest) with pick holes equivalent to Neenah R-1780-A.
- D. Manhole steps Neenah 1981—1, spacing 12 inch or 16 inch centers. The max. distance to the 1st step shall be 18".
- E. Precast adjusting rings may be used to a maximum of 8 inches to set frames to finish grade.
- F. Manholes (precast) reinforced A.S.T.M. C478 (latest) min. 48 inch diameter for pipe 24 in. And less, 60 inch diameter for pipe 27 in. To 36 inches (U.N.).
- G. Ductile iron pipe shall conform to the requirement of A.S.A. A21.51, Class 52, cement lined with push—on joints (A.S.A. A21.11). Fittings shall conform to A.S.A. Specifications A21.10.

# III - Sanitary Sewer (Construction)

- A. Minimum bedding four inches below pipe to 12 inches above top of pipe. Bedding material shall be 3/4" clean gravel.
- B. Selected granular material. It shall be required for all sewer trenches lying under existing or proposed street, driveway or sidewalk and within 24 inches thereof. The backfill material shall be filled to the top of the trench with crushed limestone.
- C. Manholes shall have 4 inches of stone bedding. The joints shall have "O" rings or shall be performed bituminous plastic gasket with inert mineral filler similar to Ram—Nek to provide watertight seal.
- D. Manhole frames shall be set to final grade and fastened to manhole with Kent-Seal or equal material to provide watertight seal.
- E. Water—stop gaskets shall be provided at all sanitary sewer manhole connections. Such aaskets shall be in accordance with manufacturer's specifications for the type of pipe used.
- F. The external chimney seal shall be provided on all sanitary sewer manholes.
- G. "Band—Seal" joints with stainless steel straps and bolts shall be used at all points of change in sewer pipe material.
- H. Repair sleeves shall not be used to make closures during new construction.
- I. Sanitary sewer will be tested by air test (5 PSI for 5 min. Max. Loss=1.0 PSI). If, in the opinion of the Engineer/Inspector conditions warrant, he may require an infiltration test in lieu of the air test.
- J. In addition to the air or infiltration testing, the following tests shall be performed in PVC pipe if used:
- J.1. The entire system shall be deflection tested.
- J.2. The lines shall be tested for excess deflection by pulling a mandrel through the pipe from manhole to manhole. The outside diameter of the test mandrel shall be equal to 95% percent of the original inside diameter of the pipe being used.
- J.3. The individual lines to be tested shall be so tested no sooner than thirty days after they have been installed.
- J.4. Wherever possible and practical, the testing shall initiate at the downstream lines and proceed towards the upstream lines.
- J.5. Where deflection is found to be in excess of 5% of the original pipe diameter, the contractor shall excavate to the point of excess deflection and carefully compact around the point where excess deflection was found. The line shall then be retested for deflection. However, should after the initial testing, the deflected pipe fail to return to the original size (inside diameter), the line shall be replaced.
- K. Maximum allowable infiltration shall be 200 gallons per inch of diameter or sewer per mile per 24 hours.
- L. The Manhole shall be air tested in accordance with ASTM C1244—93, Standard Test Method for Concrete Sewer Manholes by Negative Air Pressure (Vacuum) Test.

# IV - Water Main (Materials)

- A. Ductile iron pipe shall conform to the requirement of ASA A21.51, pressure class 350, asphalt coated, cement lined with push—on joints ASA A21.11. Fittings shall conform to ASA Specification A21.10. Fittings shall conform to ASA Specification A21.10.
- B. Hydrants shall be compression type AWWA C-502, 300 PSI test and 150 PSI working pressure. Hydrant shall be Kennedy K-81 (or approved equal) "Breakaway" type with auxiliary valve, box and cover with 2, two and one-half inch nozzle and 1, four and one half inch steamer. The bottom flange of the hydrant shall be set flush with finish grade. Hydrant shall be painted red. It shall be equipped with 2 foot spacer between auxiliary valve and hydrant barrel (as needed).
- C. The valve shall conform to the latest AWWA C-500 Standard. Valve shall be clow resilient wedge type or equal. They shall have left turn opening with square heads for keying.
- D. Services shall be copper pipe water tube type K, ASTM B88 and B-251.
- E. Service boxes shall be cast iron type, Erie pattern lid and arch type BTM. With min. 24" rod. 1" box required.
- F. Valve boxes shall be cast iron extension screw type for valves on lines 8 inches and smaller having lids with the letter "water".
- G. Corporation stops and curb stops shall be brass with suitable outlet for copper connections. Curb stops shall be of the standard local requirements type with curb stop threaded into curb box.
- H. All water service taps requiring tapping saddles shall be Ford heavy brass.
- I. All fittings shall be high quality waterworks brass with AWWA standard threads.

# V - Water Main (Construction - AWWA)

shall be dune sand or crushed stone.

- A. Minimum bedding, 4 inches below pipe to top of pipe for ductile iron 6 inches below pipe to 12 inches above top of pipe for PVC. Bedding shall be of "B" borrow or fine aggregate.
- B. Selected granular material. It shall be required for all water trenches lying under existing or proposed street, driveway or sidewalk and within 24 inches thereof. The backfill material
- C. Minimum cover. 5.0' below finish grade. Maximum cover where valve is located shall not exceed 8 feet.
- D. Thrust blocks required at all bends, tees, caps, and valves (see details).
- E. Special poured—in—place anchoring shall be used on all valves to prevent movement during testing against closed valves.
- F. Hydrants shall be plumb with nozzle pointed toward roadway maintaining 24 inches clearance between finish grade and nozzle.
- G. Draining pits , for hydrants, shall be two feet in diameter and two feet deep, filled with 3/4" washed coarse aggregate.
- H. Repair sleeves shall not be used to make closures during new construction.
- I. Pressure testing shall be at 100 PSI for two hours.
- J. Leakage testing shall be based on an allowable rate of 11.65 gallons per day per inch diameter per mile based on 13 foot sections. The total amount of water pumped into the line during two hours shall not exceed the allowable.
- K. Disinfection shall be performed by flushing, then chlorinating at a rate of 50 PPM. to insure a residule of 25 PPM after 24 hours. Then after secondary flushing a minimum of two water purity samples on two consecutive days 24 hours apart shall be taken by Owner and submitted to local water utility. Provide sampling taps where requested by local water utility. Disinfection should follow AWWA C651—86 or current standards.
- L. All taps, other than services, shall be made with pressure taping sleeve and value (U.N.).
- M. Separation of water and sanitary sewer lines shall be 10 feet minimum, horizontally. If 10 feet is not possible, sewer shall be of water main quality material and construction. If crossing pipes, proved 18+ inches and in addition, locate water pipe joints an equal distance from crossing point.
- N. No. 12 copper wire is required to be installed with non—metallic water mains or buried locating type 5"—6" wide.
- O. The Contractor shall provide 3/4" tap for water sampling purposes at locations as required by local water utility.
- P. The Contractor shall provide corporation cocks as required to de—air the line.
- Q. Service taps to lots to be 1" diameter.

# VI - Paving (Materials)

- A. Pavement shall be constructed on a thoroughly compacted subgrade. Subgrade shall be compacted to at least 95 percent of the maximum dry weight that can be produced under testing procedures outlined under ASTM Designation D1557—70.
- B. Base course shall be compacted aggregate base course, INDOT 53 stone. The paved surface shall consist of bituminous concrete binder and/or surface course, installed in conformance with INDOT Standard Specifications. See plan for thickness.
- C. Sidewalks and curb and gutter shall be Portland Cement Concrete with air entrainment of 6 percent plus or minus 1 percent. Sidewalks shall have a cross slope of 2.0% max. A 5.5 bag mix shall be used. Maximum allowable slump is 4 inches. The walk shall be handicapped accessible at the intersection of all streets.
- D. The curb and gutter shall be interrupted at 100—foot intervals and at all radius points with a 3/4" thick fiber expansion joint and scoring every 20 feet. Two #4 steel reinforcing bars shall be placed through the full length of the curb and gutter interrupted only at the expansion joints. The location of all sanitary and water services shall be marked on the

# VII - Paving (Construction)

- A. All work shall conform to the applicable provisions of the standard specifications of the local governing authorities.
- B. Subgrade shall be finished to plus or minus 0.1 feet of designed subgrade elevation by the Earthwork Contractor. Final grading shall be the responsibility of the Paving Contractor.
- C. After final grading, the Contractor shall place the aggregate base course in accordance with the specifications. The base shall be primed at the rate of 0.25 to 0.50 gallons per square yard with a liquid asphalt conforming to RS-2, RC-70, or MC-30 depending on surface and weather conditions. The type of primer shall be approved by the Engineer.
- D. The surface course shall be placed in accordance with INDOT Specifications.
- E. Sidewalk shall be constructed in accordance with the standard specifications. A 3/4" thick fiber expansion joint shall be installed at 50 foot intervals. At the joints between sidewalks and curb and at the joint between two runs of sidewalk, control joints shall be scribed at five foot intervals. The outside edges and joint edges shall be neatly chamfered as part of the finishing. The surface shall have a light broom finish. Immediately after finishing, the surface shall be sprayed with a colorless curing membrane.
- F. Sidewalk shall be constructed on undistributed clay or approved granular fill. If granular fill is used, it must be drained.
- G. All areas that tree stumps and roots have been removed underlie streets, sidewalks and utilities, shall be filled with select fill prior to final grading.





# VIII - Concrete

- A. Concrete and its placement shall be in accordance with ACI 318 and ACI 301 except as modified in these specifications. Protect all concrete in accordance with ACI standards for hot, cold weather concreting.
- not, cold wedther concreting.
- B. Standard weight concrete shall comply with the following:1. Minimum compressive strength (at 28 days): 4,000 psi
- 2. Maximum water/cement ratio .45 air entrained
   3. Aggregate size Footings 12" thick or greater 1-1/2"
- All other concrete 3/4"

  4. Total air content 6% ± 1-1/2% 3/4" aggregate
  - $-5\% \pm 1-1/2\% 1-1/2$ " aggregate ax Slump -3%
- 5. Max Slump 3%
  6. Reinforcing Bars: Provide deformed bars complying with ASTM A615 grade 60
- 7. Welded wire fabric: ASTM A185. cold drawn steel plain
  8. No admixtures without approval from engineer. Admixtures containing chlorides

shall not be used.

- C. Concrete coverage for reinforcing (U.N.O.):1. Unformed concrete in contact with earth = 3"
- 2. Formed concrete in contact with earth = 2"
   3. Other concrete = 1-1/2"
- D. Lap splices shall be the following bar diameters unless noted otherwise on drawings. Locate splices at point of minimum stress. Welded splices are not permitted.
  - D1. All reinforcement except for that noted in D2.

    Reinforcement Lap Length in Bar Diameters

    #3 #6 38

#7 - #11 48
D2. Horizontal reinforcement so placed that more than 12 inch of concrete is cast below the reinforcement (i.e. horizontal wall reinforcement and top beam

reinforcement)

Reinforcement Lap Length in Bar Diameters

#3 - #6 50

#7 - #11 62

- E. Comply with ACI 301. Position, support, and secure reinforcement against displacement, locate and support with metal chairs, runners, bolsters, spacers, and hangers, as required. Set wire ties so ends are directed into concrete, not toward exposed concrete surfaces.
- F. Re-entrant corners: At all re-entrant corners in slabs, walls and topping, the contractor shall install two (2) #3x3'-0" long, each mat, at 3-inch o.c.
- G. Provide bent corner bars to match and lap horizontal bars at corners and intersections of walls and footing.
- H. Concrete can only e placed on a frost-free subgrade.

D3. Welded wire fabric — mesh space +2"

- I. Mechanically vibrate all concrete.
- J. All cast—in—place concrete shall be protected against rapid drying and must be kept moist for a minimum of (7) days for nominal concrete.
- K. Provide a 3/4" x3/4" chamfer on all exposed corners of concrete.
- L. Maximum free drop of all concrete = 2'-0".
- M. Provide dowels of same size and spacing as vertical wall or column reinforcing, with standard hooks, at the foundation (U.N.O.)
- N. Concrete field tests for slump, air content, yield and strength shall be conducted by a certified concrete technician in accordance with ACI 301. Tests shall be submitted to engineer for approval.

# IX - Earthwork

Earthwork under this contract shall include the following:

- A. Removal and disposal of trees and other vegetation from the r.o.w.
- B. Stripping of all topsoil. Stockpiling as shown on Erosion Control plan or as directed by
- C. Clay excavation, placement and compaction as necessary to obtain designed subgrade elevations in pavement, sidewalk and detention areas.
- D. Subgrade elevations shall be finished to within 0.1 feet of designed elevations. Fine grading in pavement areas shall be the responsibility of the paving contractor.E. Fill materials shall be placed in layers not to exceed eight (8) inches loose measurement.

Each layer shall be compacted to at least ninety-five percent (95%) of the maximum dry

weight that can be produced under testing procedures as outlined under ASTM designation

- D1557-70.

  F. The owner shall be responsible for independent testing and inspection of fill operations. Based on these observations and test results, the contractor shall adjust his methods as necessary
- to achieve the required degree of compaction.

  G. It shall be the grading contractor's responsibility to maintain proper site drainage while the grading operation is in progress. The cost of maintaining said drainage shall be considered as incidental to the grading contract.

# X - IDEM Notes

During installation of the utilities, should there be any instance where the sewer lines pass within ten (10) feet of a water line or should any sewer line cross over the water line, the following guidelines MUST BE FOLLOWED:

- A. The Sanitary and Storm Sewers must be constructed of Water Main quality material (Ductile Iron) for ten (10) feet beyond said instances.
- B. Whenever a Water Main crosses below a Sanitary or Storm Sewer, a vertical separation of eighteen (18") must be provided between the crown of the water main and the invert of the
- C. Structural support sand fill must be provided for the sewer to prevent the joints from deflecting and leaking. The fill over the water line must be compacted granular material (clean sand). This fill is to be installed under the supervision of a field soil engineer. This fill is to extend to the spring line of the sewer.

Street Townhomes Development go Street, Valparaiso, IN 46385 Site Details and Specifications

McMAHON programmed form; as of form; as service. All copyrights a McMAHON. The recipient agreextent permindemnify and changes maddrawing or dewritten conse

DESIGNED DRAWN
KMC KMC
PROJECT NO.


Campbell 452 Chica


DATE 04/05/2024

SHEET NO.

25017-05-23-0010

C6.2

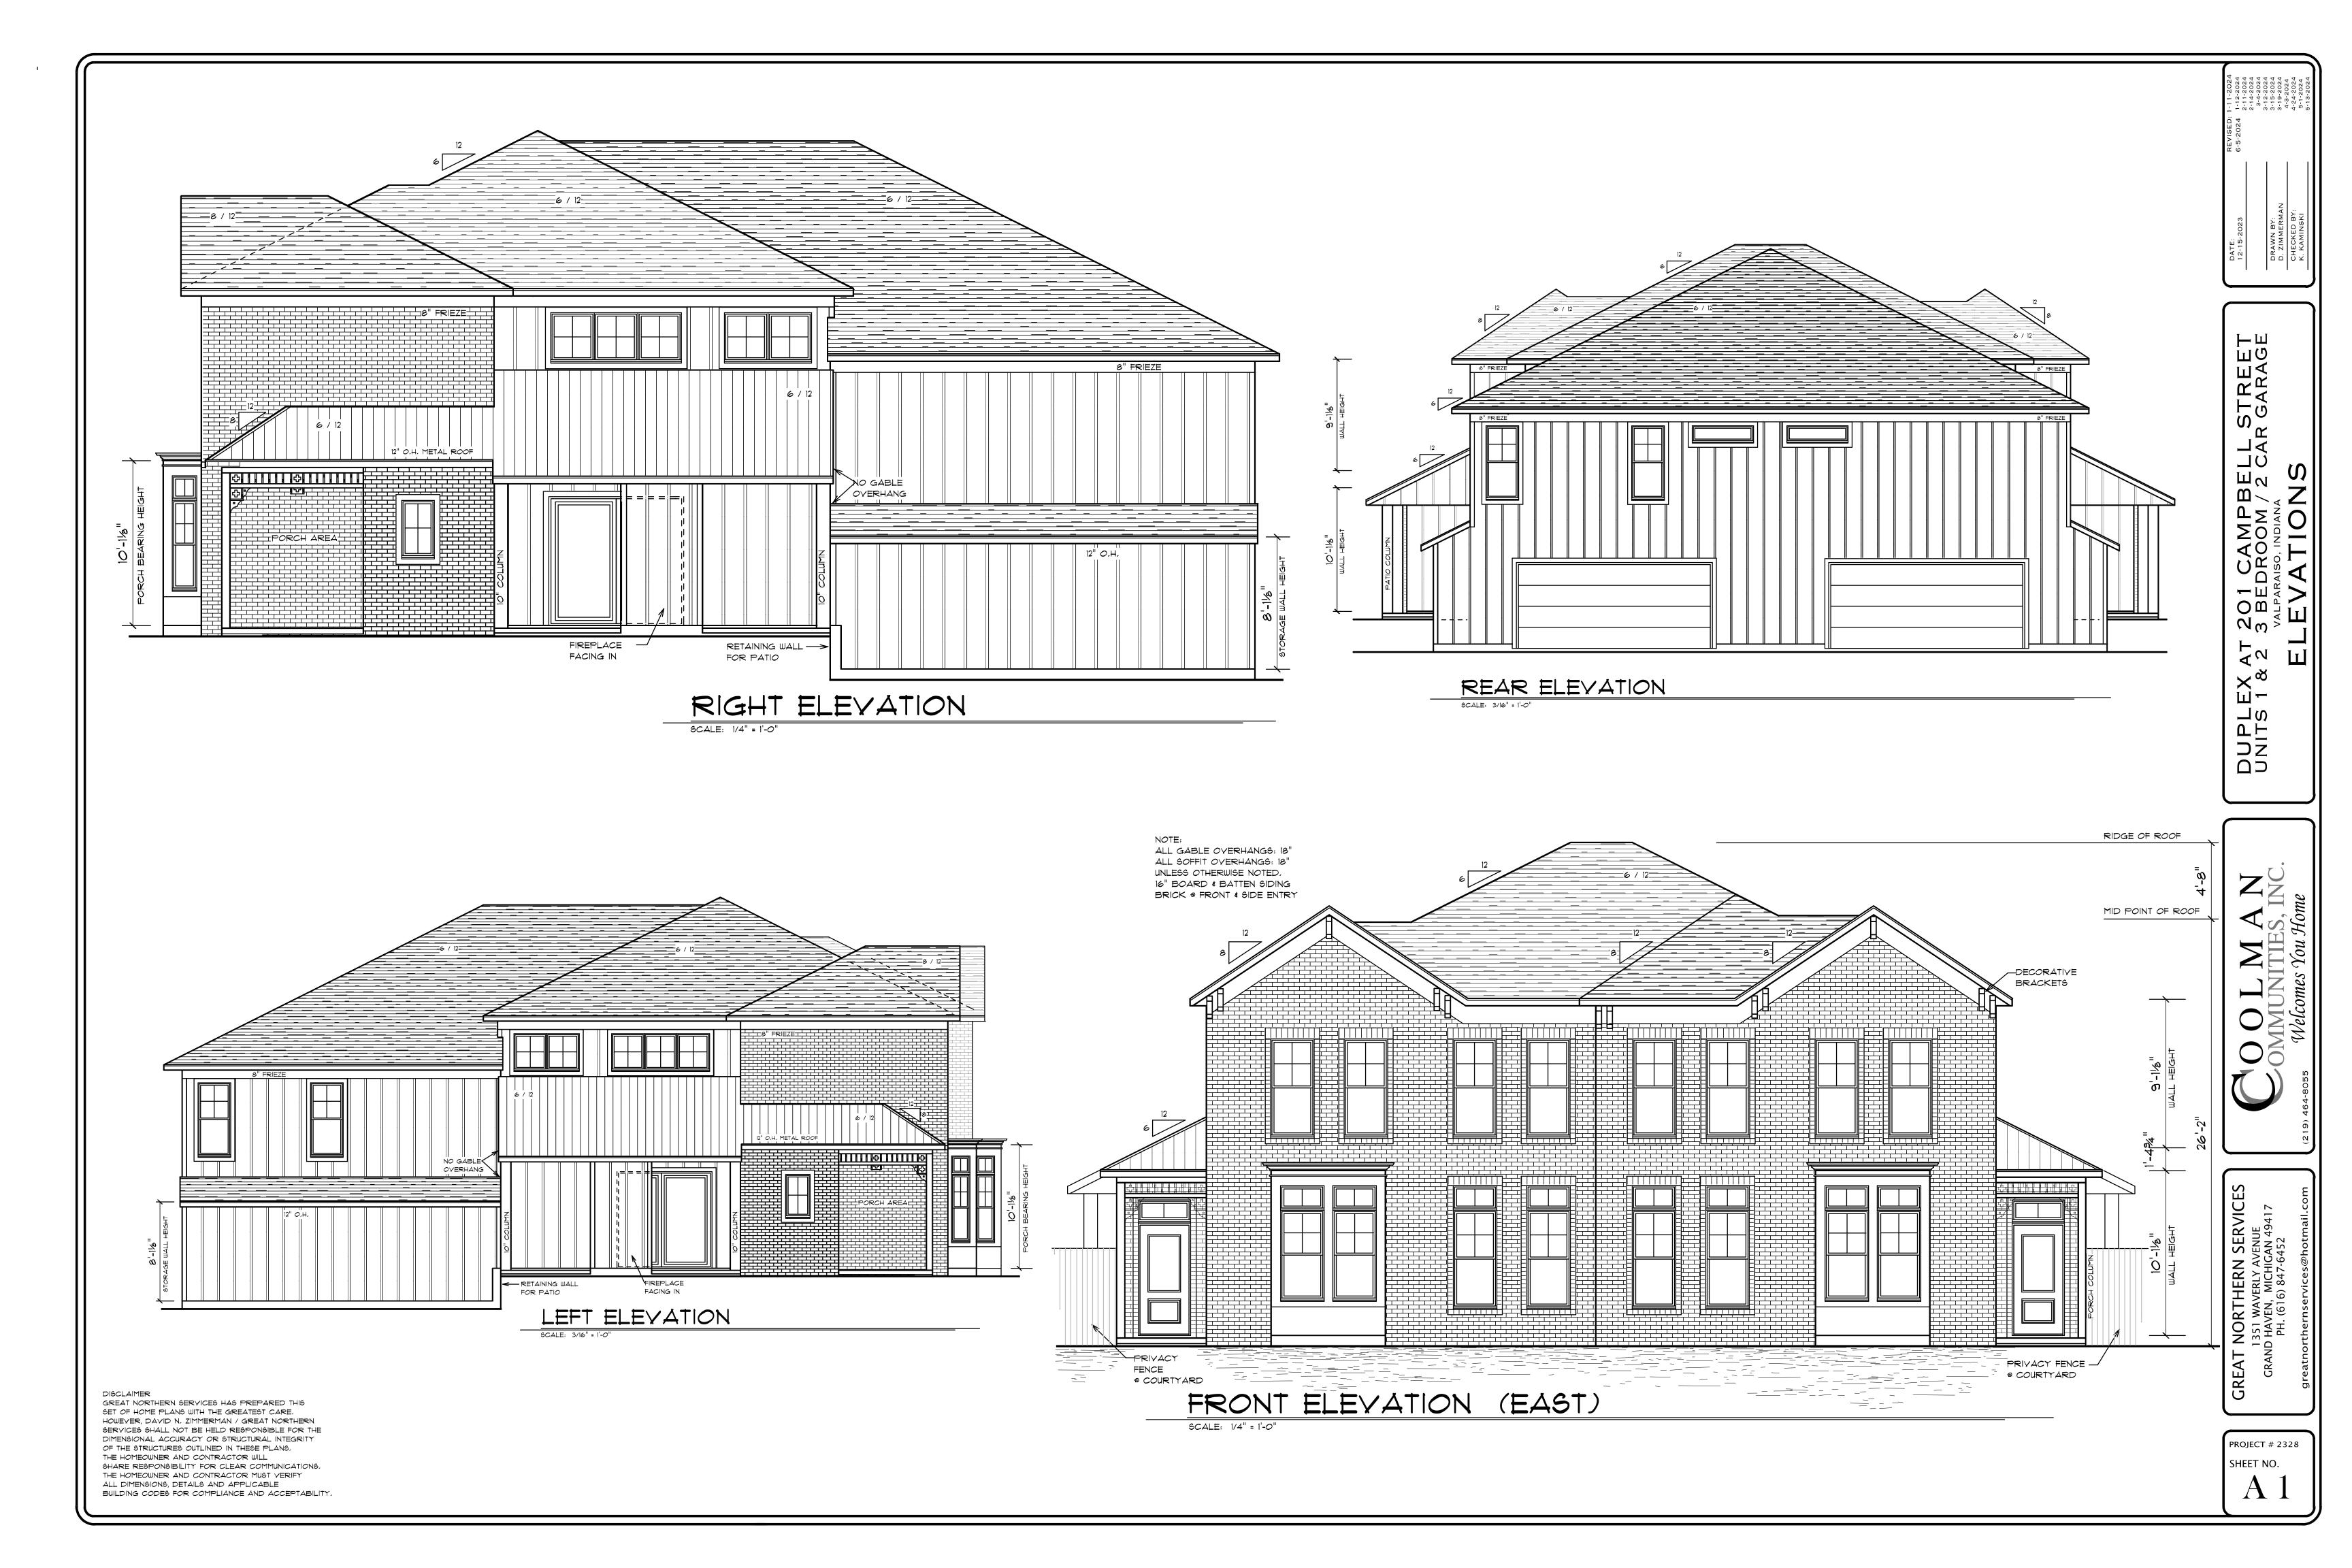

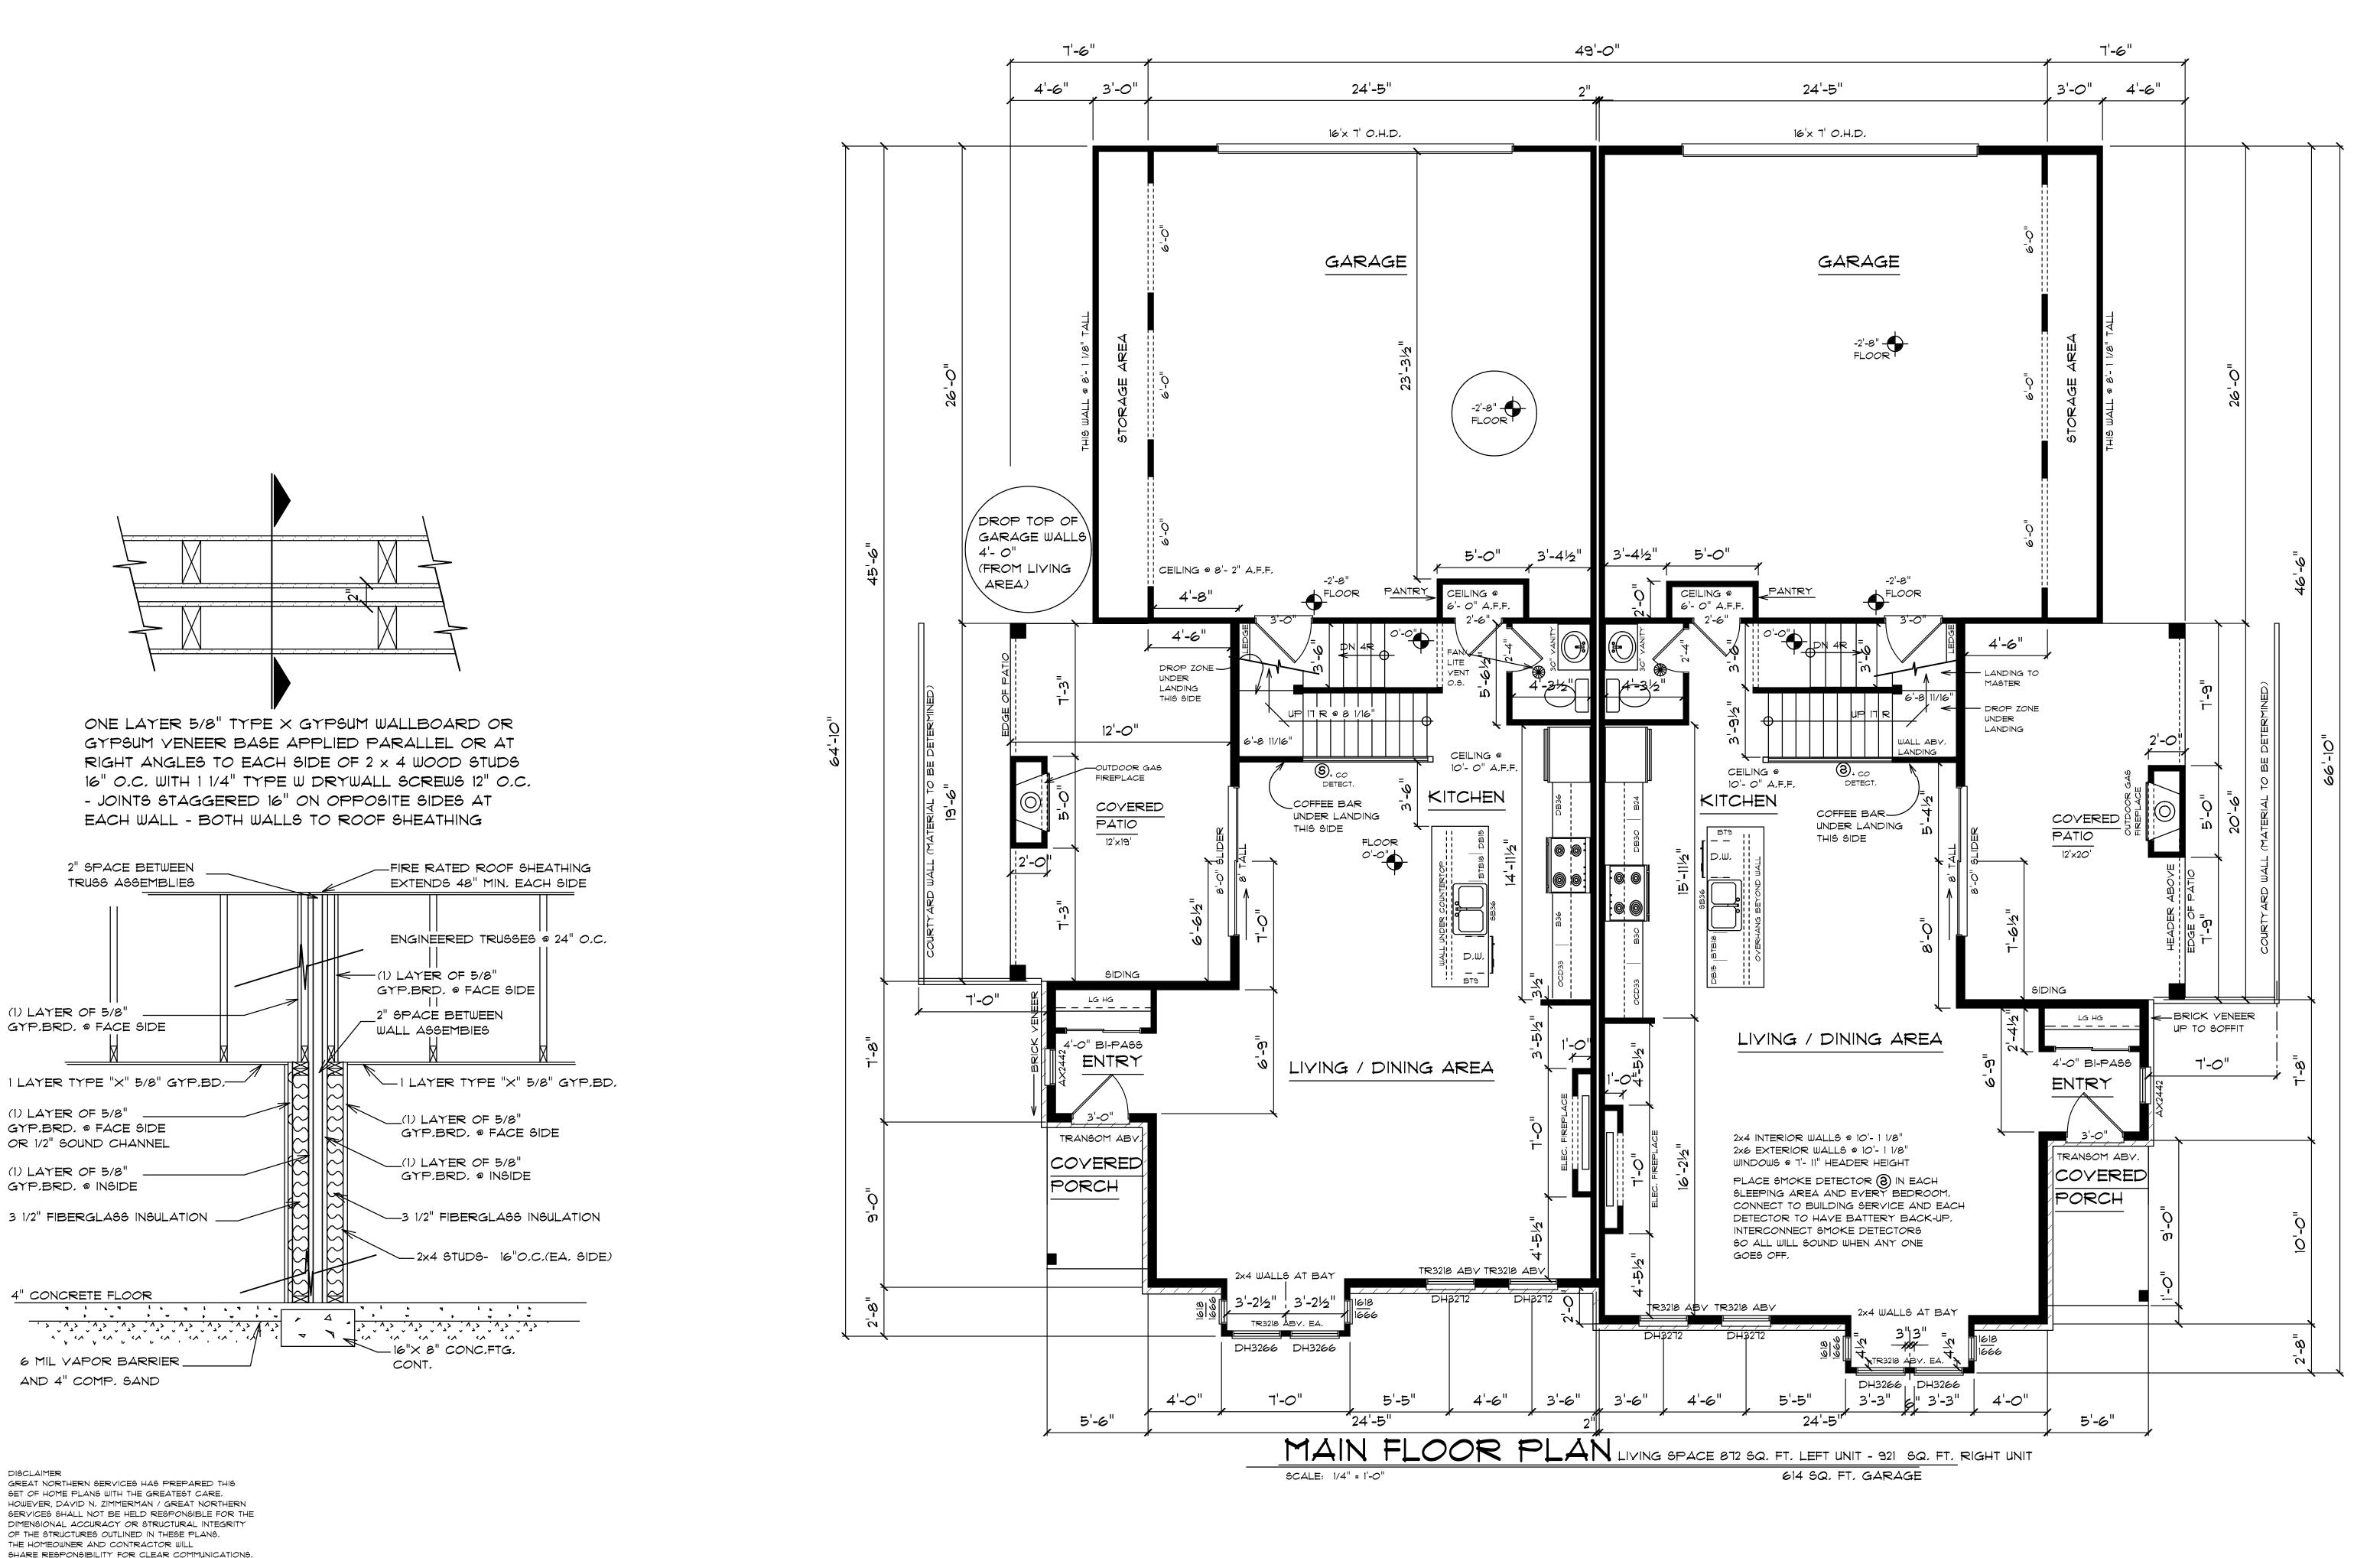

THE HOMEOWNER AND CONTRACTOR MUST VERIFY ALL DIMENSIONS, DETAILS AND APPLICABLE

BUILDING CODES FOR COMPLIANCE AND ACCEPTABILITY.


DUPLEX AT 201 CAMPBELL STREET
UNITS 1 & 2 3 BEDROOM / 2 CAR GARAGE
VALPARAISO, INDIANA


OOLMAN COMMUNITIES, INC.

AT NORTHERN SERVICES
1351 WAVERLY AVENUE
AND HAVEN, MICHIGAN 49417
PH. (616) 847-6452

PROJECT # 2328
SHEET NO. A 2



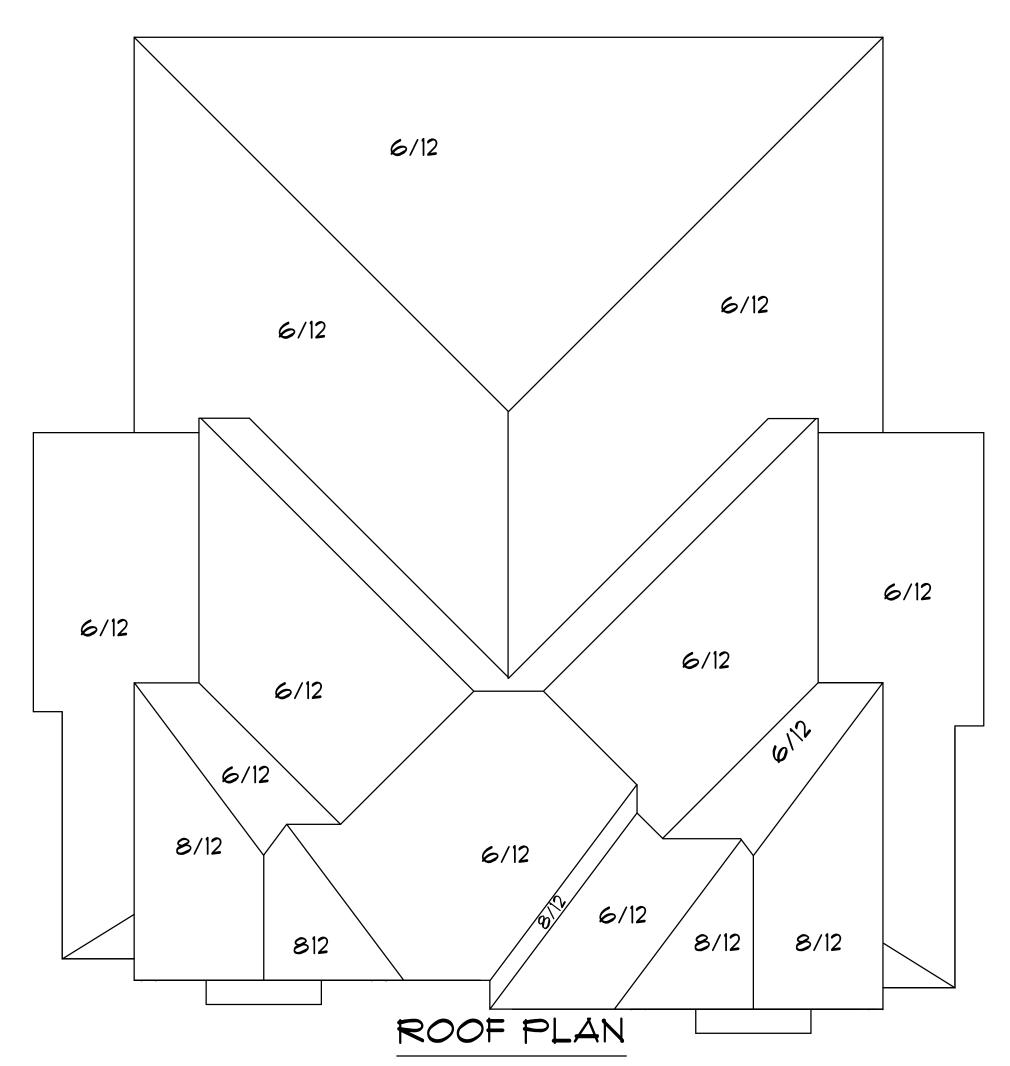

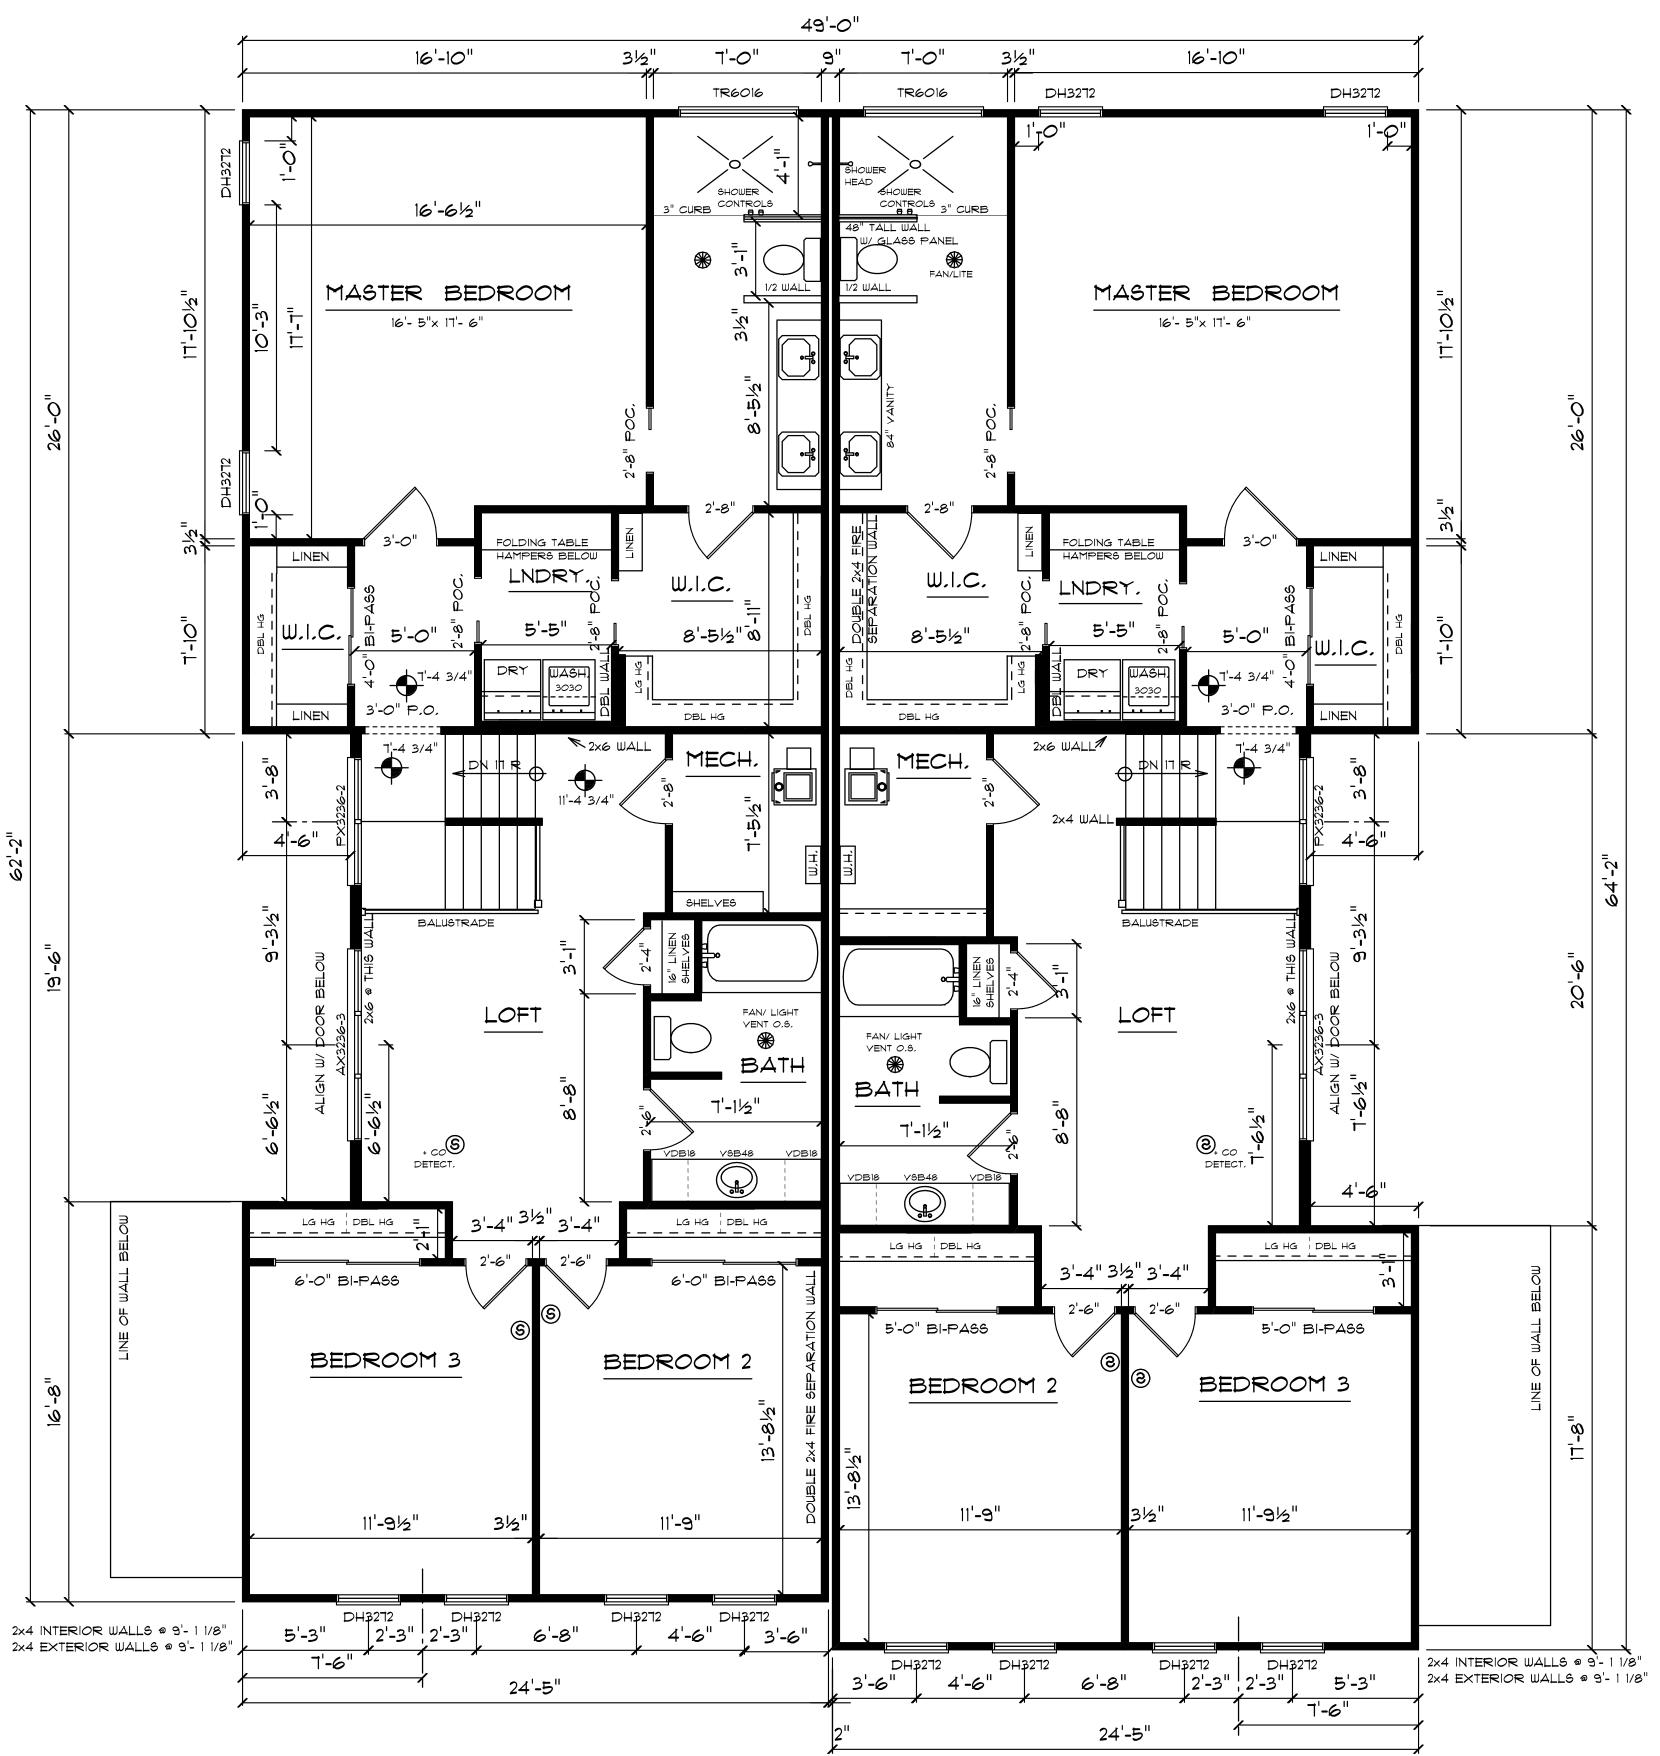

UPPER FLOOR PLAN

SCALE: 1/4" = 1'-0"

1405 SQ, FT, LEFT UNIT - 1450 RIGHT UNIT LIVING SPACE

DISCLAIMER
GREAT NORTHERN SERVICES HAS PREPARED THIS
SET OF HOME PLANS WITH THE GREATEST CARE,
HOWEVER, DAVID N. ZIMMERMAN / GREAT NORTHERN
SERVICES SHALL NOT BE HELD RESPONSIBLE FOR THE
DIMENSIONAL ACCURACY OR STRUCTURAL INTEGRITY
OF THE STRUCTURES OUTLINED IN THESE PLANS,
THE HOMEOWNER AND CONTRACTOR WILL
SHARE RESPONSIBILITY FOR CLEAR COMMUNICATIONS,
THE HOMEOWNER AND CONTRACTOR MUST VERIFY
ALL DIMENSIONS, DETAILS AND APPLICABLE

BUILDING CODES FOR COMPLIANCE AND ACCEPTABILITY.

PROJECT # 2328
SHEET NO.

T NORTHERN SERVICES
1351 WAVERLY AVENUE
AND HAVEN, MICHIGAN 49417
PH. (616) 847-6452

L STREET

BEL / 2 C/

CAMPI

Щ-


DUPL

BEI ALPAR


NW ≥ M


# Chicago Street Townhome Development, Valparaiso, IN 46385


# Landscape Plan

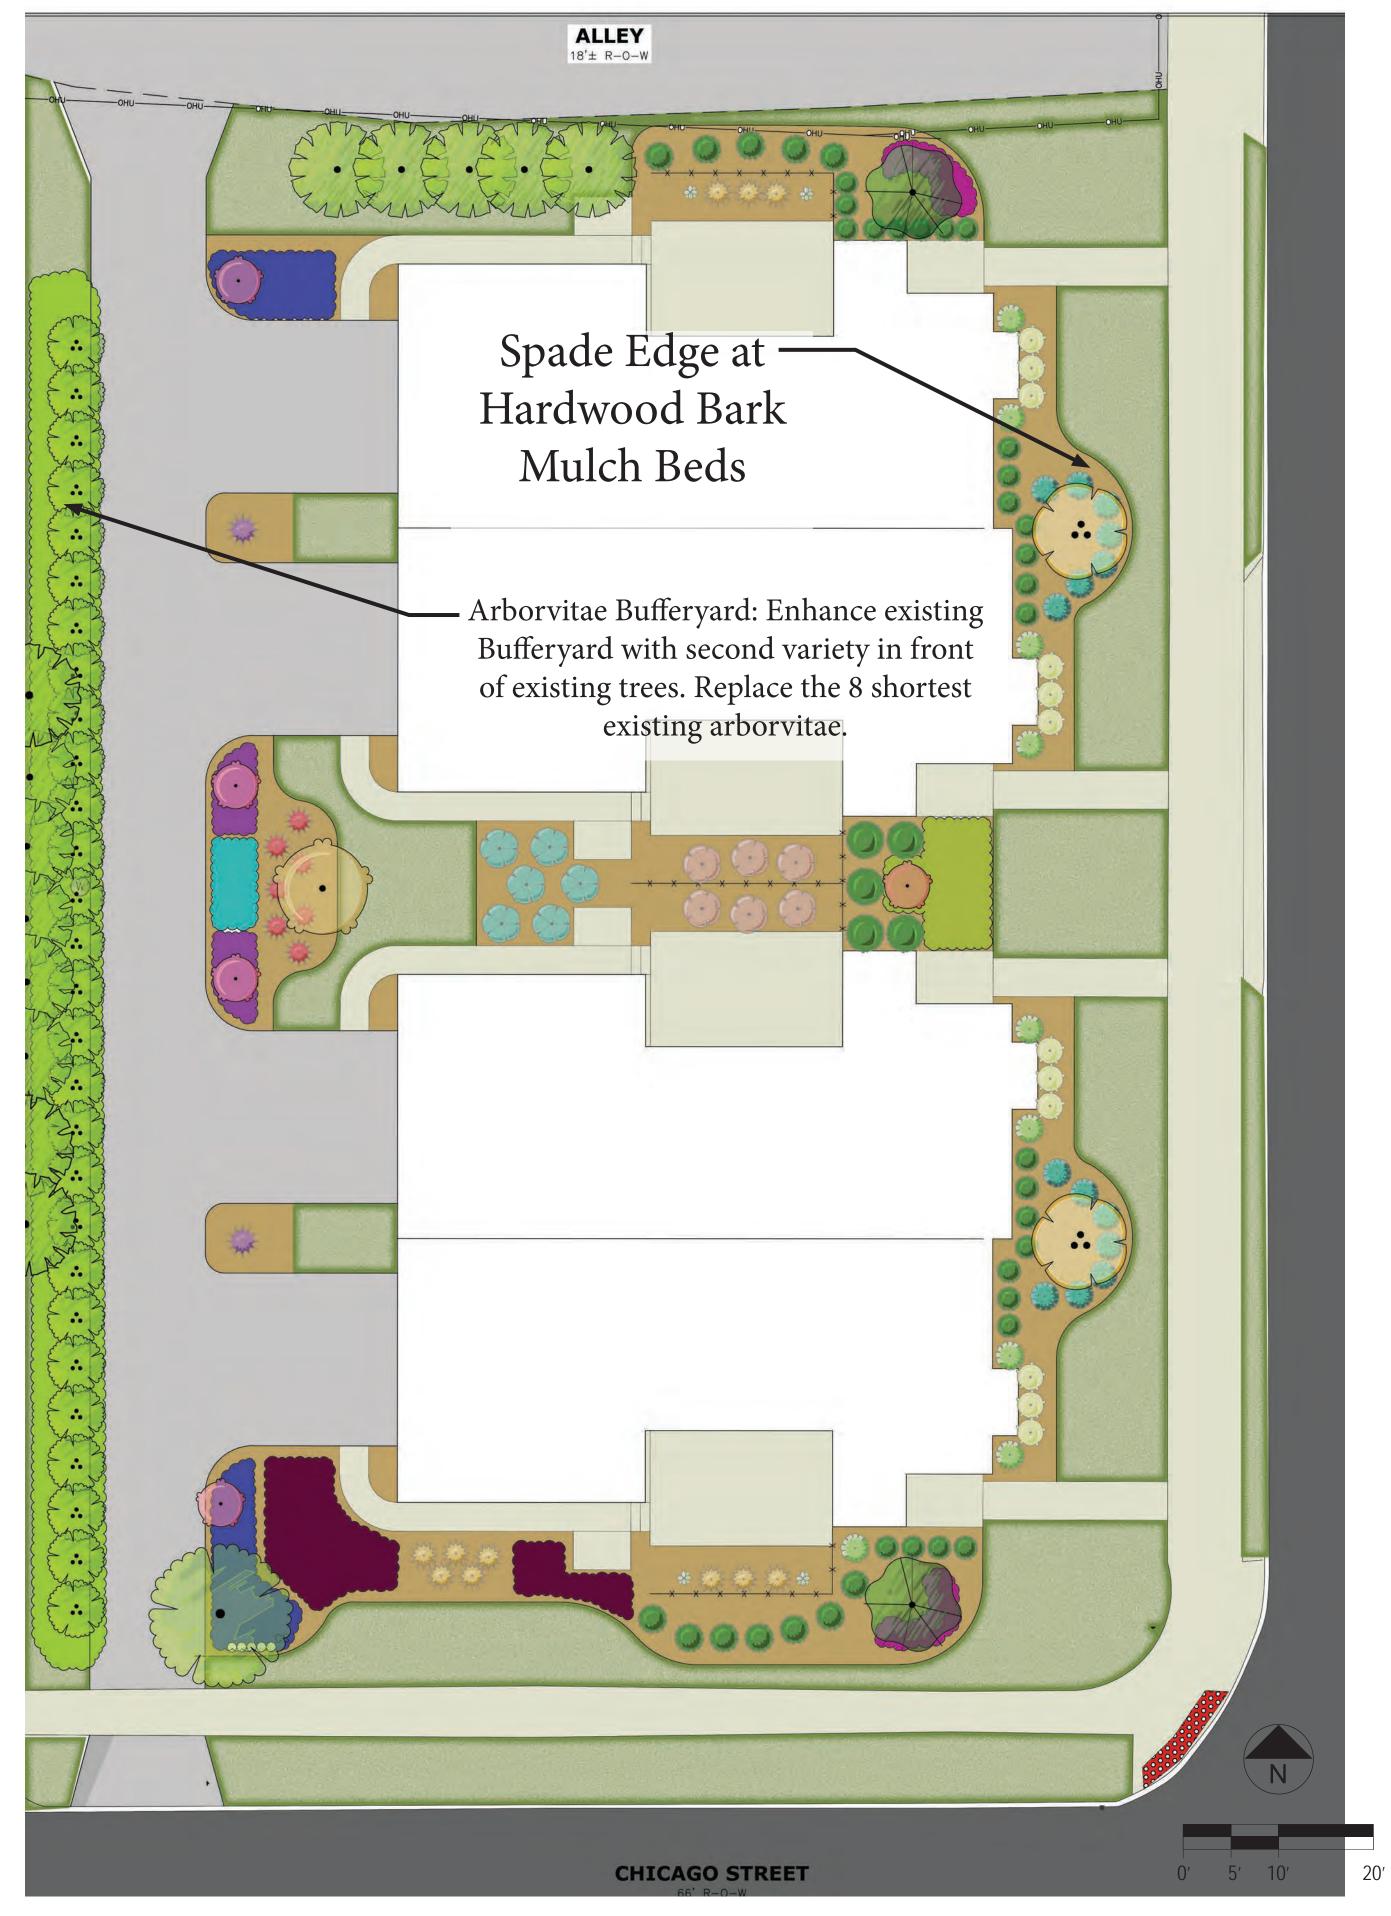

# Planting Details

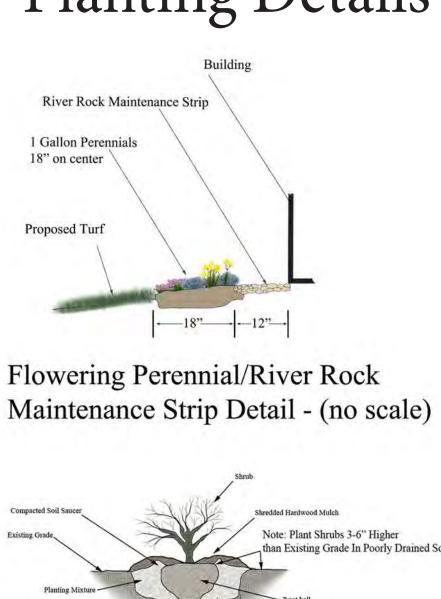

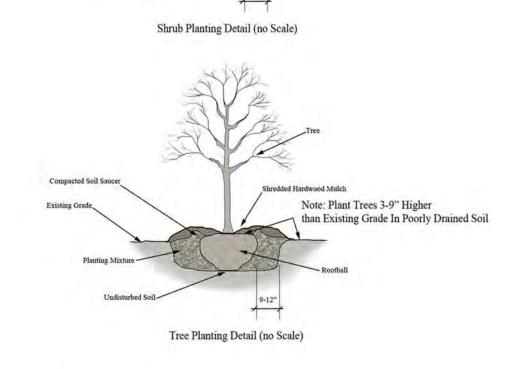


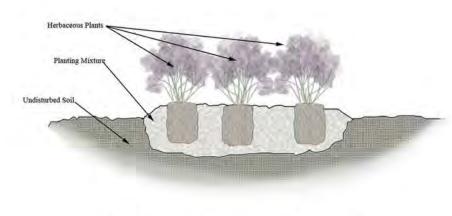

Herbaceous (Perennial and Ornamental Grass) Planting Detail (no Scale)

# Existing Bufferyard



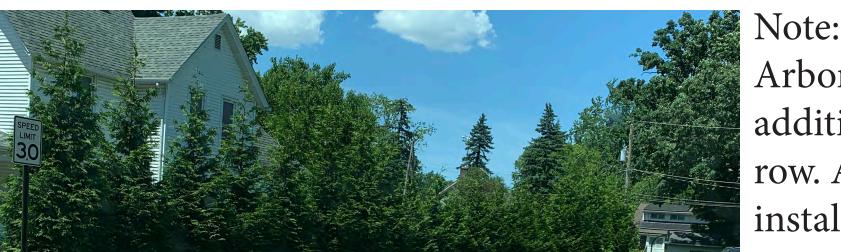

# Plant Schedule

ORNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepeta x faassenii 'Novanepjun'	SYMBOL	CODE	BOTANICAL NAME	COMMON NAME	SIZE	CONTAINER		QTY	REMARKS
TOG Thuis a "Crisen Genf. Green Clant. Green Clant Apportities 10 gat. Pot 10  PRAMERTAL TREES  APBG Aper patientum Bioofgoor Bioodgood Japanese Maple 2º Cal. Bas 1  APBG Aper patientum Bioofgoor Bioodgood Japanese Maple 2º Cal. Bas 1  APBG Aper patientum Bioofgoor Bioodgood Japanese Maple 2º Cal. Bas 1  APBG Aper patientum Bioofgoor Bioodgood Japanese Maple 2º Cal. Bas 2  APBG Aper patientum Bioofgoor Bioodgood Japanese Maple 2º Cal. Bas 2  APBG Aper patientum Bioofgoor Bioodgood Japanese Maple 2º Cal. Bas 2  SHALL TREES  ADD TREES  ADD Crategous pharenopylum Washington Hawritom 6.6° Bas 2  SHALL TREES  BYG Bouca x 'Green Velvet' Green Velvet Boowood 3 gat. Pot 20  APB ByG Bouca x 'Green Velvet' Green Velvet Boowood 3 gat. Pot 12  ADD Hydrangea paniculatia "LVGHC" Till Bobe Panicie Hydrangea 3 gat. Pot 12  ADD Japanese Chrismiese Dubb's Frested 14-brows Groots Apertage 5 gat. Pot 12  ADD Japanese Streams Dubb's Frested 14-brows Groots Apertage 5 gat. Pot 12  ADD Japanese Chrismiese Dubb's Frested 15-brows Green Stream 15 gat. Pot 14  ADD Hydrangea patientim Biochilin' Munchin Databet Hydrangea 5 gat. Pot 12  ADD Japanese Streams Dubb's Frested 15-brows Groots Apertage 5 gat. Pot 12  ADD Japanese Velve 5 gat. Pot 14  ADD Hydrangea patientim Bibe Mulfin' Bus Mulfin Anowycood Viburrum 5 gat. Pot 14  ADD Hydrangea Streams Dubb's Frested 15-brows Groots Switch Grass 5 gat. Pot 14  ADD Hydrangea patientim Bibe Mulfin' Bus Mulfin Anowycood Viburrum 5 gat. Pot 14  ADD Hydrangea Carles Apple Streams Streams Grant Streams Apple 5 gat. Pot 17  ADD Hydrangea Carles Apple 5 gat. Pot 16  ADD Hydrangea Carles Apple 5 gat. Pot 17  ADD Hydrangea Carles Apple 6 gat. Pot 17  ADD Hydrangea Carles App	TREES								
DRNAMENTAL TREES  APBG Acer patriaturi Gloodgood* Bloodgood Japanese Meple 2° Cal. B&B 1  Comellian Cherry 5.6° B&B 2° Comellian Cherry 6.6° B&B 5 2  APDG Hydrangea particulata Sulk* APDG Hydrangea particulata Sulk* APDG THESS  SHADE TREES  TS Glootisia tria-carifros Horey Silk Japanese Tree Lifac 15 gal. Pot 1  TS Glootisia tria-carifros Horey Locast 'Skyline' 2° Cal. B&B 1  SHALL TREES  TO Crassegue phaenopyrum Wischington Nawthorn 6.5° B&B 2  SHAULT TREES  TO Crassegue phaenopyrum Wischington Nawthorn 6.5° B&B 2  TO Crassegue phaenopyrum Wischington Nawthorn 6.5° B&B 2  APPG Burus a 'Green Velvet' Green Velvet' Boravood 3 gal. Pot 2 2  Hydrangea generickian Naurchiari Manchiari Manchiari Hydrangea 5 gal. Pot 6 2  Hydrangea generickian Naurchiari Manchiari Manchiari Manchiari Galeari Hydrangea 5 gal. Pot 6 3  JODF Julipearus chinenies Touch's Frosted Dauch's Frosted Julipear 5 gal. Pot 12  TMH Tausus x model Nicksa'i Hose Angro-Japanese Yew 3 gal. Pot 12  TMM Tausus x model Nicksa'i Hose Angro-Japanese Yew 3 gal. Pot 14  TMM Tausus x model Nicksa'i Hose Angro-Japanese Yew 3 gal. Pot 15  TWD Williamum certatum Blue Mulffri' Blue Mulffla Arrowyood Viburum 5 gal. Pot 16  TRA Per CAL Caliumagrostis x acutiflora Yarif Forester' Shelangea Sedge 1 gal. Pot 7  PDC Prancum virgatum Shereardosh' Shenandosh Switch Crass 5 gal. Pot 7  PDC Prancum virgatum Shereardosh' Shenandosh Switch Crass 5 gal. Pot 7  PDC Prancum virgatum Shereardosh' Shenandosh Switch Crass 5 gal. Pot 6 18° oc. 56  PERENNIALS  AND Period CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS  DRNAMENTAL GRASS  CODE Gures cathinesses Evergold' Evergod Japanese Sedge 1 gal. Pot 16° oc. 52  PERENNIALS  AND Nepsta x faseseni's Novaneplur' Wilefer's Lovy Walefer's Lovy Catrinit 1 gal. Pot 24° oc. 22  Hydra And Allum at Millerium' Namendosh Walefer's Lovy Walefer's Lovy Catrinit 1 gal. Pot 24° oc. 22  Hydra Andrea Salar		TTC	Thuja occidentalis 'Techny'	Techny Arborvitae	6-8	B&B		28	
APBG Acer palmistum 'Bloodgood' Bloodgood Japanese Magle 2' Cal. B8B 1  CM Comus mas Cometain Chierry 6.8' B8B 2  HPDT Hydrangee particulata 'Buk' 4  SRIS Syringe reboulata 'Nory SIK' leony SIK Japanese Tree Lileo 15 gal. Pot 1  SHADE TREES  GT5 Gredisia trisconthos Honey Court Syringe' 2' Cal. B8B 1  CP Cratesque phaenopyrum Washington Hearthorn 6.8' B8B 2  SHAUL TREES  BYG Boxus x Green Velvet Creen Velvet Boxwood 3 gal. Pot 26 24' Ht Hydrangee particulata 'LUGBO' TM Bobo Panicle Hydrangee 3 gal. Pot 12  HPDI Hydrangee guerofolia 'Munchkin' Munchkin Caldeat Hydrangea 5 gal. Pot 12  HGM Hydranges querofolia 'Munchkin' Munchkin Caldeat Hydrangea 5 gal. Pot 12  JCDF Juniponas chierries' Dauli's Troetiof Deub's Frosted Uniper 5 gal. Pot 14  JCDF Juniponas chierries' Dauli's Troetiof Deub's Frosted Uniper 5 gal. Pot 14  JCDF Juniponas chierries' Dauli's Troetiof 'Blook's Frosted Uniper 5 gal. Pot 14  JCDF Juniponas chierries' Dauli's Troetiof 'Blook's Frosted Uniper 5 gal. Pot 14  JCDF Juniponas chierries' Dauli's Troetiof 'Blook's Frosted Uniper 5 gal. Pot 14  JCDF Juniponas chierries' Dauli's Troetiof 'Blook's Frosted Uniper 5 gal. Pot 14  JCDF Juniponas chierries' Dauli's Troetiof 'Blook's Frosted Uniper 5 gal. Pot 14  JCDF Juniponas chierries' Dauli's Troetiof 'Blook's Frosted Uniper 5 gal. Pot 14  JCDF Juniponas chierries' Dauli's Troetiof 'Blook's Frosted Uniper 5 gal. Pot 14  JCDF Juniponas chierries' Dauli's Troetiof 'Blook's Frosted Uniper 5 gal. Pot 15  JCDF Juniponas chierries' Dauli's Troetiof 'Blook's Shooky Graes Switch Creass 5 gal. Pot 1  JCDF Juniponas chierries' Dauli's Troetiof 'Blook's Shooky Graes Switch Creass 5 gal. Pot 1  JCDF Juniper Straubas Troetion 'Blook's Shooky Graes Switch Creass 5 gal. Pot 7  JCDF Juniper Straubas Troetion 'Blook's France' 'Blook's Company Shooky Graes Switch Creass 5 gal. Pot 7  JCDF Juniper Straubas Troetion 'Blook's Company Shooky Graes Switch Creass 5 gal. Pot 7  JCDF Juniper Straubas Troetion 'Blook's Company Shooky Graes Switch Creass 5 gal. Pot 7  JCDF Junip	E STATE OF THE STA	TGG	Thuja x 'Green Giant'	Green Giant Arborvitae	10 gal.	Pot		10	
Communication Co	ORNAMEN	ITAL TRE	EES						
HPOT Hydrangea paniculate Tauk' SRIS Syringa reticulate "Nory Silk' Invery Silk' Inverted Sil		APBG	Acer palmatum 'Bloodgood'	Bloodgood Japanese Maple	2" Cal.	B&B		1	
SRIS Syringa reticulatia "Ivory SIIK Incorporation   Series   Seri		СМ	Cornus mas	Cornelian Cherry	6-8`	B&B		2	
SHADE TREES  GTS Gledisia triacanthos Honey Locust 'Skyline' 2' Cal. B&B 1  SMALL TREES  CP Crategus phaenceyrum Weshington Hawthorn 6-8' B&B 2  SHRUBS  BVG Buxus x Green Velvet' Green Velvet Boxwood 3 gal. Pot 28 24' Ht  HPI Hydrangea panculatar 'LLVOBO' TM Bobo Paincle Hydrangea 3 gal. Pot 12  HOM Hydrangea querciclia 'Munchkin' Munchkin' Authority Carnet Sweetspire 5 gal. Pot 12  JCDF Juniperus chinerisis 'Daub's Frosted' Deub's Frosted Juniper 5 gal. Pot 12  RF Rhammus frangula 'Ron Williams' Forsted' Deub's Frosted Juniper 5 gal. Pot 14  RF Rhammus frangula 'Ron Williams' Forsted' Deub's Frosted Juniper 5 gal. Pot 14  NDRN Viburnum dentatum 'Blue Muffer' Blue Muffer' Blue Muffer Arrowwood Viburnum 5 gal. Pot 5 24' Ht  DRNAMENTAL GRASSES  CAL Calenagrostis x acutifora Karl Foerster' Smoky Rose Switch Grass 5 gal. Pot 7  PAN Panicum virgatum 'Dream Catcher' 'Smoky Rose' Smoky Rose Switch Grass 5 gal. Pot 7  FRANCE For Pan Panicum virgatum 'Dream Catcher' 'Smoky Rose' Smoky Rose Switch Grass 5 gal. Pot 7  FRANCE FOR BOTTALLS  HF Hosts x 'Francee' France Hosts 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING CTY REMARKS CRNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 15' o.c. 58  PERENNIALS  ALM Allum x 'Milenium' Milenium Gomanental Onion 1 gal. Pot 15' o.c. 39  NEP Nepeta racemosa Walker's Lov Walker's Low Cartmit 1 gal. Pot 16' o.c. 22  NAW Nepeta x fasssenii Novanepjun' Walker's Low Cartmit 1 gal. Pot 16' o.c. 22		HPQT	Hydrangea paniculata 'Bulk'		• 40•gal; •	··Pot·····		4	
GTS Glediteia triacanthos Honey Locust 'Skyline' 2' Cal. 888 1  SMALL TREES  CP Crataegus phaenopyrum Weshington Hawthorn 6.8' 888 2  SHRUBS  BVG Buxus x 'Green Velvet' Green Velvet Boxwood 3 gal. Pot 26 24' Ht 12  HPI Hydrangea paniculata TLVOBO' TM Bobo Panicle Hydrangea 3 gal. Pot 12  HOM Hydrangea quercifolia Munchkin' Munchkin Oakleaf Hydrangea 5 gal. Pot 12  JCDF Juniperus chinenais 'Daub's Frosted' Daub's Frosted Juniper 5 gal. Pot 12  RF Rhamnus frangula 'Ron Williams' Frosted Juniper 5 gal. Pot 14  RF Rhamnus frangula 'Ron Williams' Frosted Juniper 5 gal. Pot 14  VDBM Viburnum dentatum 'Blue Muffin' Blue Muffin Arrowwood Viburnum 5 gal. Pot 5 24" Ht 15  VDRNAMENTAL GRASSES  CAL Calamagrostis x acutiflora 'Karl Foerster' Karl Foerster' Feather Reed Grass 5 gal. Pot 11  PDR Panicum virgatum 'Dream Calcher' Smoley Rose' Smoley Rose Switch Grass 3 gal. Pot 2  PAN Paricum virgatum 'Shenandosh' Shenansoah Switch Grass 5 gal. Pot 7  PERENNIALS  LF He Hosta x Francee' Francee Hosta 1 gal. Pot 18' o.c. 56  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS CORNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergoid Japanese Sedge 1 gal. Pot 18' o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18' o.c. 59  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 24' o.c. 22  NEW Nepsta x faassenii 'Novanepijun' ************************************		SRIS	Syringa reticulata 'Ivory Silk'	Ivory Silk Japanese Tree Lilac 15 gal.		. Pot		1	
SMALL TREES  CP Cratacgus phaenopyrum Washington Hawthorn 6-8: B&B 2  SHRUBS  BVG Buxus x 'Green Velvet' Green Velvet Boxwood 3 gal. Pot 28 24" Ht 12  HPI Hydrangea paniculata 1LVOBO'TM Bobo Panicle Hydrangea 3 gal. Pot 12  HOM Hydrangea quercloia "Munchkin" Munchkin Oakteal Hydrangea 5 gal. Pot 12  JCDF Juniperus chinensis "Daub's Frosted" Daub's Frosted Juniper 5 gal. Pot 12  RF Rhamnus frangula 'Ron Williams' Jaub's Frosted Juniper 5 gal. Pot 14  RF Rhamnus frangula 'Ron Williams' Hicks Anglo-Japanese Yew 3 gal. Pot 5 24" Ht 14  VDBM Viburum dentatum 'Blue Muffin' Blue Muffin Arrowwood Viburum 5 gal. Pot 6  STRIMENTAL GRASSES  CAL Calamagresis x acutifiora 'Karl Foerster' Karl Foerster Feather Reed Grass 5 gal. Pot 11  PDR Panicum virgatum 'Toream Calcher' 'Smoky Rose Switch Grass 3 gal. Pot 7  PERENNIALS  HF Hosta x Francee' Francee Hosta 1 gal. Pot 15 oc. 56  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS DRNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergoid Japanese Sedge 1 gal. Pot 16" oc. 59  PERENNIALS  ALM Allum x 'Millenium' Millenium Omamental Onion 1 gal. Pot 16" oc. 22  NLW Nepsta x faassenil 'Novanepijun' Howers Low Calmint 1 gal. Pot 24" oc. 22  NLW Nepsta x faassenil 'Novanepijun'	SHADE TR	EES							
CP Crataegus phaenopyrum Washington Hawthorn 6-8: B88 2  SHRUBS  BVG Buxus x 'Green Velvet' Green Velvet Boxwood 3 gal. Pot 26 24" Ht PPI Hydrangea paniculata "LLVOBC' TM Bobo Panicle Hydrangea 3 gal. Pot 12  HOM Hydrangea quercifolia "Munchkin' Munchkin Caldeaf Hydrangea 5 gal. Pot 6  Hom Hydrangea quercifolia "Munchkin' Munchkin Caldeaf Hydrangea 5 gal. Pot 12  JCDF Juniperus chinenis 'Daub's Frosted' Daub's Frosted Juniper 5 gal. Pot 14  RF Rhamnus françula "Ron Williams' Pot 14  RF Rhamnus françula "Ron Williams' Pot 15 gal. Pot 14  VDBM Viburnum dentatum "Blue Muffin' Blue Muffin Arrowwood Viburnum 5 gal. Pot 6  DRNAMENTAL GRASSES  CAL Calamagrostis x acutifora 'Karl Foerster' Karl Foerster Feather Reed Grass 5 gal. Pot 11  PDC Panicum virgatum 'Dream Catcher' Smoky Rose' Smoky Rose Switch Grass 3 gal. Pot 7  PPERENNIALS  HF Hosta x Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS CONSAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 58  PERENNIALS  ALM Allum x 'Millenium' Millenium Omamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa Walker's Low' Walker's Low Calmint 1 gal. Pot 24" o.c. 22  NJW Nopeta x faassenii 'Novanepjun'		GTS	Gleditsia triacanthos	Honey Locust 'Skyline'	2" Cal.	B&B		1	
BVG   Buxus x 'Green Velvet'   Green Velvet Boxwood   3 gal.   Pot   28   24° Ht	SMALL TR	EES							
BVG Buxus x 'Green Velvet' Green Velvet Boxwood 3 gal. Pot 26 24" Ht 10 Hydrangae paniculata "LVOBC" TM Bobo Panicle Hydrangea 3 gal. Pot 12 Ht 12 Hydrangae paniculata "LVOBC" TM Bobo Panicle Hydrangea 3 gal. Pot 12 Hold Hydrangea quercifolia Munchkin' Munchkin Oakleaf Hydrangea 5 gal. Pot 12 JCDF Juniperus chinensis 'Daub's Frosted' Daub's Frosted Juniper 5 gal. Pot 14 JCDF Juniperus chinensis 'Daub's Frosted' Daub's Frosted Juniper 5 gal. Pot 14 JCDF JUNIPERUS chinensis 'Daub's Frosted' Daub's Frosted Juniper 5 gal. Pot 5 JCDF JUNIPERUS chinensis 'Daub's Frosted' Daub's Frosted Juniper 5 gal. Pot 5 JCDF JCDF JCDF JCDF JCDF JCDF JCDF JCDF		СР	Crataegus phaenopyrum	Washington Hawthorn	6-8`	B&B		2	
HPI Hydrangea paniculata "ILVOBO" TM Bobo Panicle Hydrangea 3 gal. Pot 12 HQM Hydrangea quercifolia "Munchkin" Munchkin Oakleaf Hydrangea 5 gal. Pot 6 HQM Hydrangea quercifolia "Munchkin" Munchkin Oakleaf Hydrangea 5 gal. Pot 12 JCDF Juniperus chinensis "Daub's Frosted" Daub's Frosted Juniper 5 gal. Pot 14 RF Rhamnus frangula 'Ron Williams' 5 gal. Pot 14 RF Rhamnus frangula 'Ron Williams' 9 TMH Taxus x media 'Hicksii" Hicks Anglo-Japanese Yew 3 gal. Pot 5 24' Ht 10 VDBM Viburnum dentatum 'Blue Muffin' Blue Muffin Arrowwood Viburnum 5 gal. Pot 6  DRNAMENTAL GRASSES CAL Calamagrostis x acutiflora 'Karl Foerster' Karl Foerster Feather Read Grass 5 gal. Pot 11 PDC Panicum virgatum 'Dream Catcher' Smoky Rose' Smoky Rose Switch Grass 3 gal. Pot 2 PAN Panicum virgatum 'Shenandoah' Shenandoah Switch Grass 5 gal. Pot 7  PERENNIALS HF Hosta x 'Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS  DRNAMENTAL GRASS COCE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18' o.c. 56  PERENNIALS ALM Allum x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 16' o.c. 39  NLM Nepeta x faassenii 'Novanepjun' Walker's Low Catmint 1 gal. Pot 18' o.c. 93	SHRUBS								
HQM Hydrangea quercifolia 'Munchkin' Munchkin Oakleaf Hydrangea 5 gal. Pot 6  IHG Itea virginica 'Henry's Garnet' Henry's Garnet Sweetspire 5 gal. Pot 12  JCDF Juniperus chinensis 'Daub's Frosted' Daub's Frosted Juniper 5 gal. Pot 14  RF Rhamnus frangula 'Ron Williams' 5 gal. Pot 14  NTMH Taxus x media 'Hicksii' Hicks Anglo-Japanese Yew 3 gal. Pot 5 24' Ht 15  DRNAMENTAL GRASSES  CAL Calamagrostis x acutifiora 'Karl Foerster' Karl Foerster Feather Read Grass 5 gal. Pot 11  PDC Panicum virgatum 'Dream Catcher' 'Smoky Rose' Smoky Rose Switch Grass 3 gal. Pot 2  PAN Panicum virgatum 'Shenandoah' Shenandoah Switch Grass 5 gal. Pot 7  PERENNIALS  HF Hosta x 'Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS  DRNAMENTAL GRASS  CCC Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18' o.c. 56  PERENNIALS  ALM Allum x 'Millenium' Millenium Omamental Onion 1 gal. Pot 18' o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 18' o.c. 22  NJW Nepeta x faassenii Novanepjun' Walker's Low Catmint 1 gal. Pot 18' o.c. 93	0	BVG	Buxus x 'Green Velvet'	Green Velvet Boxwood	3 gal.	Pot		26	24" Ht
IHG   Itea virginica 'Henry's Garnet'   Henry's Garnet Sweetspire   5 gal.   Pot   12	0	HPI	Hydrangea paniculata 'ILVOBO' TM	Bobo Panicle Hydrangea	3 gal.	Pot		12	
JCDF Juniperus chinensis 'Daub's Frosted'  RF Rhamnus frangula 'Ron Williams'  RF Rhamnus frangula 'Ron Williams'  TMH Taxus x media 'Hicksii' Hicks Anglo-Japanese Yew 3 gal. Pot 5 24* Ht  VDBM Viburnum dentatum 'Blue Muffin' Blue Muffin Arrowwood Viburnum 5 gal. Pot 6  DRNAMENTAL GRASSES  CAL Calamagrostis x acutiflora 'Karl Foerster' Karl Foerster Feather Reed Grass 5 gal. Pot 11  PDC Panicum virgatum 'Dream Catcher' 'Smoky Rose' Smoky Rose Switch Grass 3 gal. Pot 2  PAN Panicum virgatum 'Shenandoah' Shenandoah Switch Grass 5 gal. Pot 7  PERENNIALS  HF Hosta x 'Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS  DRNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepetax faassenil 'Novanepjun' Walker's Low Catmint 1 gal. Pot 18" o.c. 93	0	HQM	Hydrangea quercifolia 'Munchkin'	Munchkin Oakleaf Hydrangea	5 gal.	Pot		6	
RF Rhamnus frangula 'Ron Williams'  TMH Taxus x media 'Hicksii' Hicks Anglo-Japanese Yew 3 gal. Pot 5 24" Ht VDBM Viburnum dentatum 'Blue Muffin' Blue Muffin Arrowwood Viburnum 5 gal. Pot 6 5 24" Ht OVDBM Viburnum dentatum 'Blue Muffin' Blue Muffin Arrowwood Viburnum 5 gal. Pot 6 6 5 5 24" Ht OVDBM Viburnum dentatum 'Blue Muffin' Blue Muffin Arrowwood Viburnum 5 gal. Pot 6 6 5 5 24" Ht OVDBM Viburnum dentatum 'Blue Muffin' Blue Muffin Arrowwood Viburnum 5 gal. Pot 11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	0	IHG	Itea virginica 'Henry's Garnet'	Henry's Garnet Sweetspire	5 gal.	Pot		12	
TMH Taxus x media 'Hicksii' Hicks Anglo-Japanese Yew 3 gal. Pot 5 24" Ht  VDBM Viburnum dentatum 'Blue Muffin' Blue Muffin Arrowwood Viburnum 5 gal. Pot 6  DRNAMENTAL GRASSES  CAL Calamagrostis x acutiflora 'Karl Foerster' Karl Foerster Feather Reed Grass 5 gal. Pot 11  PDC Panicum virgatum 'Dream Catcher' 'Smoky Rose' Smoky Rose Switch Grass 3 gal. Pot 2  PAN Panicum virgatum 'Shanandoah' Shenandoah Switch Grass 5 gal. Pot 7  PERENNIALS  HF Hosta x 'Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS  DRNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 18" o.c. 93		JCDF	Juniperus chinensis 'Daub's Frosted'	Daub's Frosted Juniper	5 gal.	Pot		14	
VDBM Viburnum dentatum 'Blue Muffin' Blue Muffin Arrowwood Viburnum 5 gal. Pot 6  DRNAMENTAL GRASSES  CAL Calamagrostis x acutiflora 'Karl Foerster' Karl Foerster Feather Reed Grass 5 gal. Pot 11  PDC Panicum virgatum 'Dream Catcher' 'Smoky Rose' Smoky Rose Switch Grass 3 gal. Pot 2  PAN Panicum virgatum 'Shenandoah' Shenandoah Switch Grass 5 gal. Pot 7  PERENNIALS  HF Hosta x 'Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS  DRNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 18" o.c. 93	(4)	RF	Rhamnus frangula 'Ron Williams'		••7 gal.•••	• <del>P</del> ot• • • • •		9	
CAL Calamagrostis x acutiflora 'Karl Foerster' Karl Foerster Feather Reed Grass 5 gal. Pot 11  PDC Panicum virgatum 'Dream Catcher' 'Smoky Rose' Smoky Rose Switch Grass 3 gal. Pot 2  PAN Panicum virgatum 'Shenandoah' Shenandoah Switch Grass 5 gal. Pot 7  PERENNIALS  HF Hosta x 'Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS  DRNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 18" o.c. 93	0	TMH	Taxus x media 'Hicksii'	Hicks Anglo-Japanese Yew	3 gal.	Pot		5	24" Ht
CAL Calamagrostis x acutiflora 'Karl Foerster' Karl Foerster Feather Reed Grass 5 gal. Pot 11  PDC Panicum virgatum 'Dream Catcher' 'Smoky Rose' Smoky Rose Switch Grass 3 gal. Pot 2  PAN Panicum virgatum 'Shenandoah' Shenandoah Switch Grass 5 gal. Pot 7  PERENNIALS  HF Hosta x 'Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS  DRNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepeta x faassenii 'Novanepjun' ************************************	0	VDBM	Viburnum dentatum 'Blue Muffin'	Blue Muffin Arrowwood Viburnum	5 gal.	Pot		6	
PDC Panicum virgatum 'Dream Catcher' 'Smoky Rose' Smoky Rose Switch Grass 3 gal. Pot 2  PAN Panicum virgatum 'Shenandoah' Shenandoah Switch Grass 5 gal. Pot 7  PERENNIALS  HF Hosta x 'Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS  DRNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 18" o.c. 93  NJW Nepeta x faassenii 'Novanepjun'	ORNAMEN	ITAL GRA	ASSES						
PAN Panicum virgatum 'Shenandoah' Shenandoah Switch Grass 5 gal. Pot 7  PERENNIALS  HF Hosta x 'Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS  DRNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepeta x faassenii 'Novanepjun' ************************************	**	CAL	Calamagrostis x acutiflora 'Karl Foerster'	Karl Foerster Feather Reed Grass	5 gal.	Pot		11	
HF Hosta x 'Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME COMMON NAME SIZE CONTAINER SPACING QTY REMARKS  ORNAMENTAL GRASS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepeta x faassenii 'Novanepjun' Walker's Low Catmint 1 gal. Pot 18" o.c. 93	*	PDC	Panicum virgatum 'Dream Catcher' 'Smoky Rose'	Smoky Rose Switch Grass	3 gal.	Pot		2	
HF Hosta x 'Francee' Francee Hosta 1 gal. Pot 4  SYMBOL CODE BOTANICAL NAME  COMMON NAME  SIZE CONTAINER SPACING QTY REMARKS  COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepeta x faassenii 'Novanepjun' ————————————————————————————————————	*	PAN	Panicum virgatum 'Shenandoah'	Shenandoah Switch Grass	5 gal.	Pot		7	
SYMBOL CODE BOTANICAL NAME  COMMON NAME  SIZE CONTAINER SPACING QTY REMARKS  CORNAMENTAL GRASS  COE Carex oshimensis 'Evergold'  Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium'  Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low'  Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepeta x faassenii 'Novanepjun'  NJW Nepeta x faassenii 'Novanepjun'	PERENNIA	LS							
COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepeta x faassenii 'Novanepjun'	0	HF	Hosta x 'Francee'	Francee Hosta	1 gal.	Pot		4	
COE Carex oshimensis 'Evergold' Evergold Japanese Sedge 1 gal. Pot 18" o.c. 56  PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepeta x faassenii 'Novanepjun'	SYMBOL	CODE	BOTANICAL NAME	COMMON NAME	SIZE	CONTAINER	SPACING	QTY	REMARKS
PERENNIALS  ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepeta x faassenii 'Novanepjun'	ORNAMEN	ITAL GRA							
ALM Allium x 'Millenium' Millenium Ornamental Onion 1 gal. Pot 18" o.c. 39  NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepeta x faassenii 'Novanepjun'		COE	Carex oshimensis 'Evergold'	Evergold Japanese Sedge	1 gal.	Pot	18" o.c.	56	
NEP Nepeta racemosa 'Walker's Low' Walker's Low Catmint 1 gal. Pot 24" o.c. 22  NJW Nepeta x faassenii 'Novanepjun'	PERENNIA	LS							
NJW Nepeta x faassenii 'Novanepjun'		ALM	Allium x 'Millenium'	Millenium Ornamental Onion	1 gal.	Pot	18" o.c.	39	
		NEP	Nepeta racemosa 'Walker's Low'	Walker's Low Catmint	1 gal.	Pot	24" o.c.	22	
POP Penstemon digitalis 'Onyx and Pearls' Onyx and Pearls Beardtonque 1 gal. Pot 18" o.c. 95	$(i_1, i_2, i_3)$	NJW	Nepeta x faassenii 'Novanepjun'	****** **** *** ***********************		Pot	18" o.c.	93	
		POP	Penstemon digitalis 'Onyx and Pearls'	Onyx and Pearls Beardtongue	1 gal.	Pot	18" o.c.	95	

NOTE: Plant availability subject to nursery stock inventory. Appropriate substitution will be applied in the event that these plants are unavailable.

Note: Replace the 8 shorter Arborvitae in the middle in addition to adding a second row. Arborvitae to be 6-8' at install.



# DECLARATION OF COVENANTS, RESTRICTIONS AND RECIPROCAL EASEMENTS OF CAMPBELL STREET TOWNHOMES

THIS DECLARATION OF COVENANTS, RESTRICTIONS AND RECIPROCAL EASEMENTS OF CAMPBELL STREET TOWNHOMES ("Declaration") is made and entered into this \_\_\_\_\_ day of \_\_\_\_\_\_\_, 2024, by MJF Development, Inc., an Indiana corporation ("Developer").

WHEREAS, the Developer has or is in the process of developing a four (4) lot subdivision generally located at the northwest corner of Campbell Street and Chicago Street, located in Valparaiso, Porter County, Indiana on that certain real estate more particularly described on Exhibit "A" attached hereto and incorporated herein ("Subdivision");

WHEREAS, the Developer desires the Subdivision to develop as a residential community consisting of single-family residential town homes joined together by a common exterior roof, wall, and foundation sharing a common property line; and

WHEREAS, the Developer desires to promote the orderly development of the Subdivision and to provide for the maintenance of an Easement Area by subjecting the real estate comprising the Subdivision to the covenants, restrictions, conditions, reservations, easements, charges and liens, hereinafter set forth, each and all of which is and are for the benefit of the Subdivision and the present and future owners and occupants according to the terms and conditions of this Declaration.

NOW THEREFORE, in consideration of the above premises, good and valuable consideration, and the covenants herein contained, the Declarant hereby covenants and agrees that the Subdivision, and lots therein, and all present and future owners and occupants of said parcels shall be and are hereby subject to the terms, covenants, easements, restrictions, and conditions hereinafter set forth in this Declaration, so that said parcels shall be maintained, kept, sold and used in full compliance with and subject to this Declaration and, in connection therewith, and all persons, or otherwise having an interest in the Subdivision by acceptance of a deed or other ownership interest, title or right expressly agree to the same whether expressed or contained in said deed or other method of conveying an interest in the Subdivision on behalf of themselves and their respective successors and assigns covenant and agree as follows:

### Article I

# Section 1. <u>Definitions</u>. For purposes of this Declaration:

(a) "Easement Area" shall mean those areas depicted on the plat of the Subdivision including that area identified as a 30' Utility & Ingress/Egress Easement which

are either unimproved, or are improved, as (without limitation) driveways, parking areas, open or landscaped areas or other similar exterior site improvements depicted on the Site Plan and/or plat of Subdivision.

- (b) "Driveway" shall mean that driveway and related driveway improvements, paving, curbing, entrances and exits, in the location on the Lots as shown on the Site Plan.
- (c) "Dwelling Unit" shall mean one-half (1/2) of a town home structure which is erected on adjoining Lots joined together by a common exterior roof, wall, and foundation with a commonproperty line.
- (d) "Lot" or "Lots" shall mean each separately identified lots in the Subdivision of real property now constituting a part of the real property subjected to this Declaration as described in this Declaration, and any future subdivisions thereof.
- (a) "Owner" or "Owners" shall mean the Declarant and any and all successors or assigns of such persons as the owner or owners of fee simple title to all or any portion of the Subdivision covered hereby, whether by sale, assignment, inheritance, operation of law, sheriff or judicial sale, foreclosure, or otherwise, but not including the holder of any lien or encumbrance on such real property.
- (f) "Permittees" shall mean the tenant(s) or occupant(s) of a Lot, and the respective employees, agents, contractors, invitees and licensees of (i) the Owner of such Lot, and (ii) such tenant(s) or occupant(s).
- (g) "Site Plan" shall mean that site plan of the Lots attached hereto as Exhibit "B" and by reference made a part hereof. Except as may be otherwise provided in this Declaration, the Site Plan is for identification purposes only.

### Article II

## Section 2. <u>Easements, Irrigation And Yard Maintenance</u>.

(a) Grant Of Reciprocal Ingress And Egress Easements. Subject to any express conditions, limitations or reservations contained herein, the Declarant hereby grants, establishes, covenants and agrees that the Lots, and all Owners and Permittees of the Lots, shall be benefitted and burdened by the following nonexclusive, perpetual and reciprocal easements which are hereby imposed upon the Lots and all present and future Owner's and Permittees of the Lots:

- (i) <u>Ingress And Egress Easement</u>. An easement for access, ingress and egress over all paved driveways, roadways and walkways as presently or hereafter constructed and constituting a part of the Easement Area of a Lot to provide for the passage of motor vehicles and pedestrians between all portions of the Easement Area of such Lots intended for such purposes, and to and from all abutting streets or rights of way furnishing access to such Lots.
  - (ii) <u>Implied Rights.</u> The easements granted herein shall include the right of ingress and egress to install, inspect, maintain, repair, and replace the infrastructure and related improvements for ingress and egress, and other facilities related thereto located on the Lots and all other necessary or incidental uses of the Lots for the full enjoyment of the rights granted herein; provided, however, that any such use shall not restrict, burden or reduce any portion of an easement, and should any party undertake such installation, maintenance, repair, or replacement, the party undertaking the same shall restore, as near as practical, the surface of the Lots to the same condition as it was prior to entry and disturbance thereof.
  - (b) <u>Indemnification</u>. Each Owner having rights with respect to an easement granted hereunder shall indemnify and hold the Owner whose Lot is subject to the easement harmless from and against all claims, liabilities and expenses (including reasonable attorneys' fees) relating to accidents, injuries, loss, or damage of or to any person or property arising from the negligent, intentional or willful acts or omissions of such Owner, its contractors, agents, or others acting on behalf of or otherwise through such Owner.

### (c) Reasonable Use of Easements.

- (i) The easements herein above granted shall be used and enjoyed by each Owner and its Permittees in such a manner so as not to unreasonably interfere with, obstruct the use and ownership of any other Owner or its Permittees at any time including, without limitation, access to and from public rights of way.
- (ii) No permanent building, structures, trees or other improvements inconsistent with the use and enjoyment of such easements (except as contemplated by the Site Plan) shall be placed over or permitted to encroach upon such ingress and egress easements.
- (iii) Once commenced, any construction undertaken in reliance upon an easement granted herein shall be diligently prosecuted to completion, so as to minimize

any interference with any other Owner and its Permittees. Except in cases of emergency, the right of any Owner to enter upon a Lot of another Owner for the exercise of any right pursuant to the easements set forth, or to prosecute work on such Owner's own Lot if the same interferes with easements of ingress, egress or access to or in favor of another Owner's Lot, shall be undertaken only in such a manner so as to minimize any interference with the other Owner and its Permittees. In such case, no affirmative monetary obligation shall be imposed upon the other Owner, and the Owner undertaking such work shall with due diligence repair at its sole cost and expense any and all damage caused by such work and restore the affected portion of the Lot upon which such work is performed to a condition which is equal to or better than the condition which existed prior to the commencement of such work. In addition, the Owner undertaking such work shall pay all costs and expenses associated therewith and shall indemnify and hold harmless the other Owner(s) and its Permittees from all damages, losses, liens or claims attributable to the performance of such work.

### (d) Maintenance.

- (i) General. Subject to the terms of this Declaration, the Owners of Lots shall maintain the Easement Area on their Lot in a clean and neat condition and shall take such measures as are necessary to control grass, weeds, blowing dust, dirt, litter or debris. Each Owner of a Lot covenants at all times during the term hereof to maintain or cause to be maintained at its expense all parts of its Lot located outside the Easement Area located on its Lot in good order, condition and repair.
- Maintenance of Easement Area shall include, without (ii) Easement Area. limitation, maintaining and repairing all sidewalks and the roadway areas, removing all papers, debris and other refuse from and periodically sweeping to the extent necessary to maintain the same in a clean, safe and orderly maintaining landscaping, in good condition and repair, and performing any and all such other duties as are necessary to maintain such Easement Area in a clean, safe and orderly condition. The Owner of each Lot, hereby covenants and each Owner of a Lot (by acceptance of a deed therefor, whether or not it shall be so expressed in any such deed or other conveyance) including any purchaser at a judicial sale, shall hereafter be deemed to covenant and agree to pay their proportionate share of the cost and expense of the repair, maintenance, upkeep and replacement of the Easement Area. This obligation shall include, without limiting the generality of the foregoing, mowing and clearing, the removal of snow and ice as well as the

patching, the adding of new stone aggregate and grading or maintenance and repair of the asphaltic or concrete surfaces as the case may be. obligation herein shall be shared equally and each Owner's Proportionate Share shall be equal to one-fourth (1/4) without regard to the size of individual Lots, area of Easement Area on the respective Lots, or use or nonuse of the Easement Area by the Owners. The easements granted herein shall include the areas immediately adjacent to the Easement Area on the Lots as reasonably required by the Owners of Lots to effectuate the maintenance, repair and replacement of the Easement Area or subsequently installed similar improvements. Decisions regarding the repair, maintenance, upkeep and replacement shall be made by the Declarant in its sole discretion so long as the Declaration is a Owner of a Lot in the Subdivision, and thereafter a vote of a majority of the then Owners of the Lots with each Lot being entitled to one (1) vote, regardless of the number of joint owners of each Lot. Such decisions shall include a determination of the work to be performed and the selection of the representative to oversee to the performance of such work. No owner shall be compensated for time spent in oversight of the work performed. Should the parties fail to agree on the work to be undertaken with respect to the Easement Area, said failure shall be deemed a default of this Declaration and the matter shall be decided in accordance with the provisions for default provided for in this Declaration.

- (e) <u>Insurance</u>. Throughout the term of this Declaration, each Owner shall procure and maintain general homeowners and property damage insurance against claims for personal injury (including contractual liability arising under the indemnity contained herein), death, or property damage occurring upon such Owner's Lot, with single limit coverage of not less than an aggregate of Five Hundred Thousand Dollars (\$500,000.00) or such other amounts as are usual and customary for residential occupancy in the area in which the Subdivision is located. The policies of insurance shall specifically include fire liability to include replacement cost of the Dwelling Unit and ancillary damages, and written on standard form coverages typically found and commonly referred to as HO-3 or HO-5 coverage.
- (f) No Rights in Public; No Implied Easements. Nothing contained herein shall be construed as creating any rights in the general public or as dedicating for public use any portion of the Lots, nor for any easements, except those expressly set forth in this Declaration.
- (g) <u>Irrigation System</u>. Each Lot shall keep and operate an underground irrigation system to provide regular watering for the yard and landscaped portions of the Lot. The

irrigation system shall be scheduled to operate at usual and customary times and durations necessary to ensure the health, integrity and appearance of grass, yard and landscaping on a Lot and in keeping with the intent of this Declaration to create and maintain a consistent and harmonious scheme of development of the Subdivision. All costs and expenses of operation, upkeep, repair and replacement of the irrigation system on a Lot shall be the sole responsibility of the Owner of the Lot.

- (h) <u>Yard Maintenance</u>. Each Owner at its sole cost and expense shall be responsible for the upkeep, care, repair and replacement of all yards and landscaping on their Lot and shall in good faith attempt to undertake such efforts to coincide with all Lots in the Subdivision to create and maintain a consistent and harmonious scheme of development of the Subdivision.
- (i) Owners' Determination For Irrigation & Yard Maintenance. The Owners of Lots may establish rules and regulations regarding the irrigation system and/or yard obligations set forth herein (or any portion thereof), which may include, but not be limited to, mowing and watering schedules, seasonal plant bedding material installation and clearing, mulching, pest control and engaging with contractors to provide such services all of which shall be chargeable against the Owner of a Lot. The determination and decisions to implement the work contemplated herein shall be undertaken and done in the same manner as provided for regarding Easement Area ingress and egress easement provisions of this Declaration and shall include all rights, lien rights and remedies of Owners for any default in non-payment or other performance by a defaulting Owner hereunder.

### Article III

### Section 3. Party Walls And Party Wall Restrictions.

- (a) Each wall which is built as a part of the original construction of a Dwelling Unit and placed on the dividing line between Lots shall constitute a party wall and to the extent not inconsistent with the provisions of this Declaration, the general rules of law regarding party walls and liability for property damage through the negligence or willful acts or omissions shall apply. No Owner shall cut through or make any penetration through a party wall for any purpose, or interfere with the equal use by the abutting Owner.
- (b) The middle line of said party wall shall coincide with the boundary line between two (2) Lots. In the event that, by reason of the design, inexactness of construction, shifting or settling of the Dwelling Units, any spaces, structures, utility lines, ventilation ducts, appliances or other portions or components intended to serve the

any one Dwelling Unit encroach upon the adjoining Dwelling Unit or Lot, an exclusive easement shall be deemed to exist in favor of said Dwelling Unit and Lot for maintenance, use and enjoyment of such portions or components as encroach on the adjoining Dwelling Unit and Lot, for so long as such portions or components exist

- (c) The party wall dividing any Dwelling Units shall be and remain a party wall so long as said party wall is used and useful to said premises.
- (d) The Owners of a Lot shall have the right to use the party wall by inserting, from their respective sides of boundary line between said Lots, timbers or other materials, up to, but not beyond, a vertical line drawn through the center and along the entire length of said wall, and otherwise use said party wall in any manner that may not interfere with the equal use of the other one-half (½) of said party wall by the Owner of the adjoining Lot, his heirs, grantees or assignees, or otherwise interfere with, alter and jeopardize the integrity of the party wall, including its fire protection qualities or purposes.
- (e) If it should become reasonably necessary or advisable to maintain, repair or rebuild the whole, or any portion of said party wall, the same shall be done, as near as is practicably possible so that same is of like materials, size, construction and quality as the present party wall, and the expense of such repairing or rebuilding shall be borne equally by the respective Owners, their heirs, grantees or assigns, of the adjoining Lots divided by said party wall.
- (f) In case of damage to, or destruction of, said party wall, including the foundations thereof, the Owner of either Lot on which the party wall was constructed, or his heirs, grantees or assigns, shall have the right to go upon the Lot of the other to repair or rebuild the said party wall, and each Owner shall promptly contribute and pay their respective one-half (½) of the reasonable costs of such repairing or rebuilding.
- (g) In case it becomes reasonably necessary to replace, rebuild or repair any portion of the roof supported by the party wall herein described, the respective Owners, their heirs, grantees or assigns, shall agree upon the color, type and quality of such roof, and shall share equally the cost of the same. No change shall be made in the roof design or pitch.
- (h) Whenever in this Declaration anything is required to be done by agreement of the Lot Owners, their heirs, grantees or assigns, and such persons are unable to agree thereon due to the incapacity or incompetence of any person required to give

consent, or due to the willful and/or unreasonable refusal of any person to agree thereto, the other person or persons shall have the right to petition any court of competent jurisdiction for any relief which the court may determine is necessary in the premises to effectuate and enforce the intent and purpose of this Declaration to resolve the controversy.

(i) <u>Destruction by Fire or Other Casualty</u>. If a party wall is destroyed or damaged by fire or other casualty, any Owner who shares the wall may restore it and the other Owner of the adjoining Lot shall contribute to the cost or restoration thereof in equal proportions without prejudice, however, to the right of any such Owners to demand a larger contribution from the other Owner under any rule law regarding liability for damages caused by negligent or willful acts or omissions.

### (j) <u>Architectural Control</u>.

- A. <u>Approval</u>. No exterior addition, change or alteration of a Dwelling Unit shall be made by any Owner until the plans and specifications showing the nature, kind, shape, height, color, materials and location shall have been submitted to and approved in writing by the adjoining Owners as to the harmony of external design and location in relation to the adjoining structure and topography, which approval shall not be unreasonably withheld.
- B. <u>Decorating Scheme</u>. Each Dwelling Unit shall have a uniform and coordinated exterior decorating scheme, and each Lot shall have a coordinated and sightly landscaping scheme. Any substantial deviation from the original exterior decoration and landscaping shall require the written approval of the adjoining Owners. Awnings, canopies, exterior shutters and other similar decor may not be added without the written approval of the other Owners. Each approval required hereunder shall not be unreasonably withheld.
- C. <u>Responsibility of Owners</u>. The Owners of Dwelling Units shall have the responsibility to repair, replace and maintain the exterior and interior of their Dwelling Units in a clean, sightly and attractive manner.

### (k) Insurance.

A. Each Owner shall be required to obtain and maintain adequate insurance of his Dwelling Unit, which shall insure the Dwelling Unit for its full replacement value, with no deductions for depreciation, against loss by fire

- or other hazards. Such insurance shall be sufficient to cover the full replacement value or for necessary repair or reconstruction work.
- B To the extent obtainable, each Owner shall be required to obtain and maintain general liability insurance against liability for any negligent act of commission or omission occurring within a Dwelling Unit or upon a Lot.
- C Upon request, each Owner shall be required to supply the other Owner with evidence of insurance coverage on his Dwelling Unit which complies with the provisions of this section.
- Repair or Replacement of Damaged or Destroyed Property. Each Owner shall be (1) required to reconstruct or repair any Dwelling Unit destroyed by fire or other casualty. In the event of damage or destruction by fire or other casualty to any Dwelling Unit covered by insurance, then such Owner shall, with the concurrence of the Owner's mortgagee, if any, within thirty (30) days of the receipt of the insurance proceeds, contract for or otherwise substantially start the repair or rebuilding of the damaged or destroyed portions of the Dwelling Unit in a good and workmanlike manner, in conformance with the original plans and specifications. If such Owner refuses or fails for any reason to so repair or rebuild as provided, then the other Owner is hereby irrevocably authorized by such Owner to repair and rebuild such damaged or destroyed portions of the Dwelling Unit in a good and workmanlike manner in conformance with the original plans and specifications thereof. In such event, the other Owner shall have a lien against such defaulting Owner's Dwelling Unit and land in whatever amount sufficient to adequately pay for such repair or rebuilding. The lien rights shall be as provided for in this Declaration.

### Article IV

### Section 4. Subdivision Restrictions.

(a) Residential Use. The real estate subject to these covenants and restrictions may be used for single family residential living units located in a structure which is erected on two adjoining Lots joined together by a common exterior roof, wall, and foundation with a common property line is considered a residential living unit and for no other purpose. There shall be no more one (1) principal dwelling on any one (1) Lot. No business or commercial building may be erected on any Lot. Except as otherwise provided for herein, no business or home occupation may be conducted on any Lot or portion thereof. No building or other improvements shall be erected upon

any Lot without prior approval of the Declarant or the Owners as the case may be as elsewhere herein provided. No Lot shall be divided, subdivided or reduced in size unless each divided or subdivided portion thereof is consolidated with one or more contiguous Lots under one (1) ownership.

- (b) <u>No Accessory Structures or Temporary Building</u>. No sheds, tents, trailers, vans, shacks, tanks or temporary or other accessory buildings or structures shall be erected or permitted to remain on any Lot or in the Easement Area.
- (c) <u>Antennae</u>. No aerial, antennae or satellite dish antennae greater than one (1) meter in diameter shall be placed or erected upon any Lot, or affixed in any manner to the exterior of any building in the Subdivision.
- (d) <u>Boats and Motor Vehicles</u>. No boats, recreational vehicles or other motor vehicles, except four-wheel passenger automobiles, shall be placed, parked or stored upon any Lot or in the Easement Area, nor shall any maintenance or repair be performed upon any boat or motor vehicle upon any Lot, except within a fully enclosed building and totally isolated from public view.
- (e) <u>Artificial Vegetation</u>. No artificial grass, plants or other artificial vegetation shall be placed or maintained upon the exterior portion of any Lot.
- (f) <u>Automobile Storage Areas</u>. No automobile garage shall be permanently enclosed or converted to other use. No carports shall be permitted. All garages must have doors that are to be maintained in useable condition.
- (g) <u>Clothes Drying Area</u>. No portion of any Lot shall be used as a drying or hanging area for laundry of any kind, it being the intention hereof that all such facilities shall be provided within the Dwelling Unit on a Lot.
- (h) <u>Animals</u>. No animals, livestock, or poultry of any kind shall be raised, bred, or kept on any Lot. However, dogs, cats and other commonhousehold pets may be kept on Lots, so long as they are not kept, bred, or maintained for commercial purposes. No animals shall be allowed to run loose at any time.
- (i) <u>Rubbish, Trash and Garbage</u>. No rubbish, trash, garbage or other waste materials shall be kept or permitted on any Lot, except in sanitary containers located in appropriate areas concealed from public view.
- (j) <u>Fences, Hedges and Walls</u>. No fence, hedge, wall or other dividing instrumentality shall be constructed or maintained on any Lot unless approved by the Developer

- except such items erected by the Developer along the Subdivision boundaries or easement areas.
- (k) <u>Nuisances</u>. Nothing shall be done or maintained on any Lot which may be or become a nuisance to the Subdivision or surrounding neighborhood.
- (l) <u>Signs</u>. No sign of any kind shall be displayed to public view on any Lot or any Easement Area, except for the following:
  - A. The Developer, or the sales agent for the Developer, may place one professional sign on any Lot or Lots advertising the Lot or Lots for sale, including open house advertisement and similar items.
  - B. Owners may display "for rent" or "for sale" signs not to exceed two square feet by the Owner or its designated representative.
- (m) <u>Miscellaneous</u>. No weeds, underbrush or other unsightly growths shall be permitted to grow or remain upon any Lot, and no refuse pile or unsightly objects shall be allowed to be placed or suffered to remain anywhere thereon; and in the event that any Owner shall fail or refuse to keep Owner's Lot free of weeds, underbrush or refuse piles, or other unsightly growths or objects, then any Owner may enter upon said Lot and remove the same at the expense of the Owner as provided for herein, and such entry shall not be deemed a trespass.
- (n) Residential Setback and Lot Coverage Requirements. No dwelling, house or other above-grade structure designed to be used in connection with such house shall be constructed or placed on any Lot in the Subdivision except in compliance with City of Valparaiso requirements and as provided herein. All dwellings or houses and above-grade structures designed to be used in connection therewith shall be constructed or placed on Lots in the Subdivision so as to comply with the setback lines as established in the plat or plats of the various portions of the Subdivision.
- (o) <u>Yard Lights</u>. Should the Owners determine a yard post lamplight is desired for the Subdivision, each Lot in the Subdivision shall keep and maintain a yard post light with a dusk to dawn photo cell on the Lot and otherwise in the style and design required by the Owners.
- (p) Owner's Obligation to Maintain Lot. Unless such tasks or obligations are undertaken by the Owners, the Owner of a Lot in the Subdivision shall at all times maintain the Lot, real estate and improvements in such a manner as to prevent the Lot and improvements from becoming unsightly.

- Necessary Exceptions for Development. Developer, or the transferees of Developer, shall undertake the work of developing all Lots included within the Subdivision. The completion of that work and the sale, rent, or other disposition of the dwellings is essential to the establishment and welfare of the Subdivision as an on-going residential community. In order that such work may be completed and the Subdivision established as a fully-occupied residential community as soon as possible, nothing in this Declaration shall be understood or construed to prevent the Developer, Developer's transferees, or the employees, contractors or sub-contractors of Developer, or of Developer's transferees, from doing whatever they may determine to be reasonably necessary or advisable for the completion of the work and the establishment of the Subdivision as a residential community, and the disposition of Lots by sale, lease or otherwise.
- Business Use of Lot. An Owner or occupant residing on a Lot may conduct business (r) activities within a Lot so long as: (i) the existence or operation of the business activity is not apparent or detectable by sight, sound, or smell from outside the Lot; (ii) the business activity conforms to all zoning requirements for the Subdivision; (iii) the business activity does not involve door-to-door solicitation of residents of Subdivision; (iv) the business activity does not generate a level of vehicular or pedestrian traffic or a number of vehicles being parked in the Subdivision which is noticeably greater than that which is typical of Lots in which no business activity is being conducted; and (v) the business activity is consistent with the residential character of the Subdivision and does not constitute a nuisance, or a hazardous or offensive use, or threaten the security or safety of other residents of the Subdivision. This subsection shall not apply to any activity conducted by Developer, or its designated agents or contractors with respect to its development and sale of the Lots or products of the Developer or its use of any Lots which it owns within the Subdivision.

### Article V

### Section 5. Remedies and Enforcement.

(a) All Legal and Equitable Remedies Available. In the event of a breach or threatened breach by any Owner or its Permittees of any of the terms, covenants, restrictions or conditions hereof, the other Owner(s) shall be entitled forthwith to full and adequate relief by injunction and all such other available legal and equitable remedies from the consequences of such breach, including payment of any amounts due and specific performance. The remedies specified herein shall be cumulative and in addition to all other remedies permitted at law or in equity, and each Owner expressly reserves any and all such rights and remedies.

- (b) Self-Help. In addition to all other remedies available at law or in equity, upon the failure of a defaulting Owner to cure a breach of this Declaration within thirty (30) days following written notice thereof by an Owner (unless, with respect to any such breach the nature of which cannot reasonably be cured within such 30-day period, the defaulting Owner commences such cure within such 30-day period and thereafter diligently prosecutes such cure to completion), any Owner shall have the right to perform such obligation contained in this Declaration on behalf of such defaulting Owner and be reimbursed by such defaulting Owner upon demand for the reasonable costs thereof together with interest at the prime rate as provided for in the Wall Street Journal, or its equivalent, from time to time, plus two percent (2%) (not to exceed the maximum rate of interest allowed by law). Notwithstanding the foregoing, in the event of (i) an emergency, (ii) blockage or material impairment of the easement rights, and/or (iii) the unauthorized parking of vehicles, an Owner may immediately cure the same and be reimbursed by the other Owner upon demand for the reasonable cost thereof together with interest at the prime rate, plus two percent (2%), as above described.
- (c) Lien Rights. Any claim for reimbursement, including interest as provided for in this Declaration or enforcement action of any kind, and all costs and expenses including reasonable attorneys' fees awarded to any Owner in enforcing any payment or equitable action in any suit or proceeding arising from or related to this Declaration shall be assessed against the defaulting Owner in favor of the prevailing party and shall constitute a lien (the "Assessment Lien") against the Lot of the defaulting Owner until paid, effective upon the recording of a notice of lien with respect thereto in the Office of the County Recorder of Porter County, Indiana, provided, however, that any such Assessment Lien shall be subject and subordinate to (i) liens for taxes and other public charges which by applicable law are expressly made superior, and (ii) all liens recorded in the Office of the County Recorder of Porter County, Indiana prior to the date of recordation of said notice of lien. All liens recorded subsequent to the recordation of the notice of lien described herein shall be junior and subordinate to the Assessment Lien. Upon the timely curing by the defaulting Owner of any default for which a notice of lien was recorded, the party recording same shall record an appropriate release of such notice of lien and Assessment Lien. The Assessment Lien may be enforced in the same manner as provided under the then existing Indiana Mechanic's Lien Law. Upon a transfer of title to any Lot, the grantee shall be jointly and severally liable for any repair, maintenance, upkeep and replacement assessed and other charges due at the time of conveyance. obligation to pay as required by this agreement is a separate, independent and personal covenant on the part of each owner of a Lot. No sale, transfer or proceeding in lieu of foreclosure shall relieve any owner(s) or Lot(s) from personal liability for their respective share of the costs repair, maintenance, upkeep and replacement of the private roadway or incurred to enforce this Declaration.

(d) No Termination For Breach. Notwithstanding the foregoing to the contrary, no breach hereunder shall entitle any Owner to cancel, rescind, or otherwise terminate this Declaration. No breach hereunder shall defeat or render invalid the lien of any mortgage or deed of trust upon any Lot made in good faith for value, but the easements, covenants, conditions and restrictions hereof shall be binding upon and effective against any Owner of such Lot covered hereby whose title thereto is acquired by foreclosure, trustee's sale, or otherwise.

### Article VI

### Section 6. Miscellaneous.

- (a) Attorneys' Fees. In the event that any party shall engage an attorney in connection with any action or proceeding (including without limitation intended, any arbitration proceeding) to enforce or construe this Declaration, the prevailing party in such action or proceeding shall be entitled to recover its reasonable attorneys' fees and disbursements. In the event different parties are the prevailing parties on different issues, the attorneys' fees and disbursements shall be apportioned in proportion to the value of the issues decided for and against the parties. For purposes of this Declaration, a prevailing party shall include, without limitation, a party who brings an action against the other party by reason of the other party's breach or default and obtains substantially the relief sought, whether by compromise, settlement or judgment.
- (b) <u>Amendment</u>. The parties agree that the provisions of this Declaration may be modified or amended, in whole or in part, or terminated, only by the written consent of all record Owners of a Lot, evidenced by a document that has been fully executed and acknowledged by all such record Owners and recorded in the official records of the Office of the County Recorder of Porter County, Indiana.
- (c) Multiple Owners And Consents. If ownership of a Lot is held by more than one (1) person, firm, trust, group, entity or other joint method, then the vote for that Lot shall be exercised as amongst those parties themselves determine such that only one (1) vote shall be cast with respect to any such Lot. For purposes of this Declaration, husband and wife shall be considered one person and together entitled to only one vote as they determine between themselves. Wherever in this Declaration the consent or approval of any of the Lots Owner is required, unless otherwise expressly provided herein, such consent or approval shall not be unreasonably withheld or delayed. Any request for consent or approval shall: (a) be in writing; (b) specify the section hereof which requires that such notice be given or that such consent or approval be obtained; and (c) be accompanied by such background data as is reasonably necessary to make an informed decision thereon. The consent of an

Owner under this Declaration, to be effective, must be given, denied or conditioned expressly and in writing.

- (d) <u>No Waiver</u>. No waiver of any default of any obligation by any party hereto shall be implied from any omission by the other party to take any action with respect to such default.
- (e) <u>No Agency</u>. Nothing in this Declaration shall be deemed or construed by either party or by any third person to create the relationship of principal and agent or of limited or general partners or of joint venturers or of any other association between the parties.
- (f) <u>Covenants to Run with Land</u>. It is intended that each of the easements, covenants, conditions, restrictions, rights and obligations set forth herein shall run with the land and create equitable servitudes in favor of the real property benefited thereby, shall bind every person having any fee, leasehold or other interest therein and shall inure to the benefit of the respective parties and their successors, assigns, heirs, and personal representatives.
- (g) <u>Grantee's Acceptance</u>. The grantee of any Lot or any portion thereof, by acceptance of a deed conveying title thereto or the execution of a contract for the purchase thereof, whether from an original party or from a subsequent owner of such Lot, shall accept such deed or contract upon and subject to each and all of the easements, covenants, conditions, restrictions and obligations contained herein. By such acceptance, any such grantee shall for himself and his successors, assigns, heirs, and personal representatives, covenant, consent, and agree to and with the other party, to keep, observe, comply with, and perform the obligations and agreements set forth herein with respect to the property so acquired by such grantee.
- (h) <u>Severability</u>. Each provision of this Declaration and the application thereof to the Lots are hereby declared to be independent of and severable from the remainder of this Declaration. If any provision contained herein shall be held to be invalid or to be unenforceable or not to run with the land, such holding shall not affect the validity or enforceability of the remainder of this Declaration. In the event the validity or enforceability of any provision of this Declaration is held to be dependent upon the existence of a specific legal description, the parties agree to promptly cause such legal description to be prepared. Ownership of both Lots by the same person or entity shall not terminate this Declaration nor in any manner affect or impair the validity or enforceability of this Declaration.
- (i) Time of Essence. Time is of the essence of this Declaration.
- (j) <u>Entire Agreement</u>. This Declaration contains the complete understanding and agreement of the parties hereto with respect to all matters referred to herein, and all prior representations, negotiations, and understandings are superseded hereby.

- (k) <u>Notices</u>. Notices or other communication hereunder shall be in writing and shall be sent certified or registered mail, return receipt requested, or by other national overnight courier company, or personal delivery and the address for notice shall be the address where the Porter County tax bill of the Lot is registered.
- (l) <u>Governing Law</u>. The laws of the State of Indiana shall govern the interpretation, validity, performance, and enforcement of this Declaration. The parties agree that the Courts of Porter County, Indiana shall have exclusive jurisdiction over this Declaration and all causes of action or other enforcement actions shall be filed in the Courts of Porter County, Indiana. The Subdivision and its ownership and use is subject to City of Valparaiso zoning requirements and other regulations for property lying within the City of Valparaiso.
- (m) <u>Estoppel Certificates</u>. Each Owner, within twenty (20) day of its receipt of a written request from the other Owner(s), shall from time to time provide the requesting Owner, a certificate binding upon such Owner stating: (a) to the best of such Owner's knowledge, whether any party to this Declaration is in default or violation of this Declaration and if so identifying such default or violation; and (b) that this Declaration is in full force and effect and identifying any amendments to the Declaration as of the date of such certificate.
- (n) <u>Bankruptcy</u>. In the event of any bankruptcy affecting any Owner or occupant of any Lot, the parties agree that this Declaration shall, to the maximum extent permitted by law, be considered an agreement that runs with the land and that is not rejectable, in whole or in part, by the bankrupt person or entity.
- (o) <u>Separate Taxes</u>. It is intended that real estate taxes are to be separately taxed to each Owner for his Dwelling Unit and Lot. In the event that for any year such real estate taxes are not separately taxed to an Owner but are taxed on the Subdivision or some part thereof, then such Owner shall pay the amount thereof attributable to his Dwelling Unit and Lot.
- (p) <u>Further Assurances</u>. Promptly upon request from time to time an Owner, the other party shall do, execute, acknowledge and deliver, or cause to be done, executed, acknowledged or deliver, to or at the request of such party, all further acts, transfers, assignments, powers and other documents and instruments as may be so requested to give effect to the transactions contemplated hereby provided that the no Owner shall incur any expense or additional liability as a result of the same.

IN WITNESS WHEREOF, the Declarant has executed this Declaration as of the date first written above.

	MJF Development, Inc.
By:	
	Mark J. Forszt, President

STATE OF )			
) SS:			
COUNTY OF )			
Before me, the undersigned, a Notar personally appeared Michael J. Forszt, I acknowledged the execution of the foregoing act. Signed and sealed this day of	President of I g Declaration a	MJF Developme s his duly author	nt, Inc. and
	Notary P	ublic	
	Printed County	of	Residence:
	My	Commission	Expires:

I affirm, under the penalties for perjury, that I have taken reasonable care to redact each social security number in this document, unless required by law. William A. Ferngren

This Instrument Prepared By And Return To: William A. Ferngren, Esq., Ferngren Law Offices, LLC, 570 Vale Park Road, Suite B, Valparaiso, Indiana 46385, (219) 771-0155, bill@ferngrenlaw.com; © All Rights Reserved

# Campbell Street Townhomes



The Campbell St. Townhomes will be located at the northwest corner of Campbell and Chicago St., a short walk to the city center of Valparaiso, IN. You'll be close enough to embrace all of downtown's amenities, shops, and dining establishments, as well as our newest addition to town, the Journeyman's Distillery in the Barrel district.

Acting as a transition between the condominiums of St. Paul Square and the historic Jessee Pifer neighborhood, these homes will be ideally located between the hustle and bustle of downtown and the park-like

atmosphere of the west side of Valparaiso.

Developed to address the studied need for all types of residential homes within the City, this 4-lot sub-divide will offer townhomes with a two-car garage, main-floor bedroom suite, 2253 sq. ft of living on two levels, and a private courtyard to enjoy outdoor living and cool summer breezes. Zero lot-line townhomes allow wise, maximal use of the building site, and rear-entry garages keep traffic impact to a minimum. Beautifully landscaped, our homeowners and the City will be able to enjoy a low-impact, lovely addition to their corner of the world at Chicago and Campbell.

...Downtown Living at Chicago and Campbell Streets in Valparaiso, Indiana"